
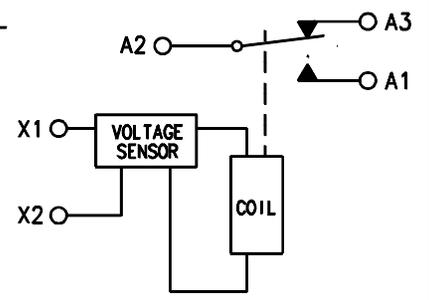
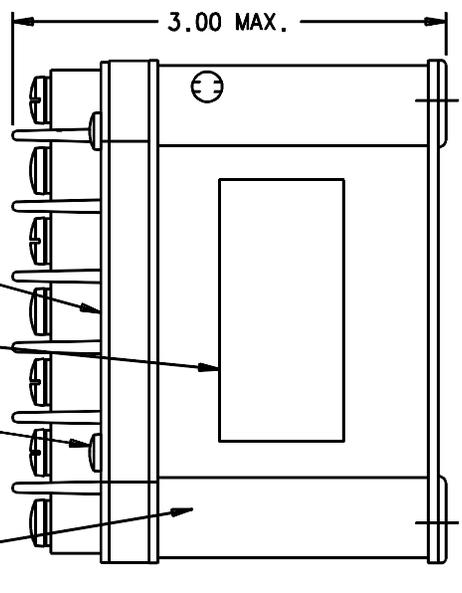


REVISIONS		RELEASED	
REV ECH No.	DESCRIPTION	DATE	APPROVED
A	DATA & WIRING DIAG. UPDATED	73/12/05	RS
B	P/C CORRECTED	74/09/25	RS
C	10617 ADDED NOTE, VENT (LOCATION OPTIONAL)	77/11/29	RS
E	06-006913 REDRAWN, ITEM 3 WAS 20502-001	06/03/06	CB

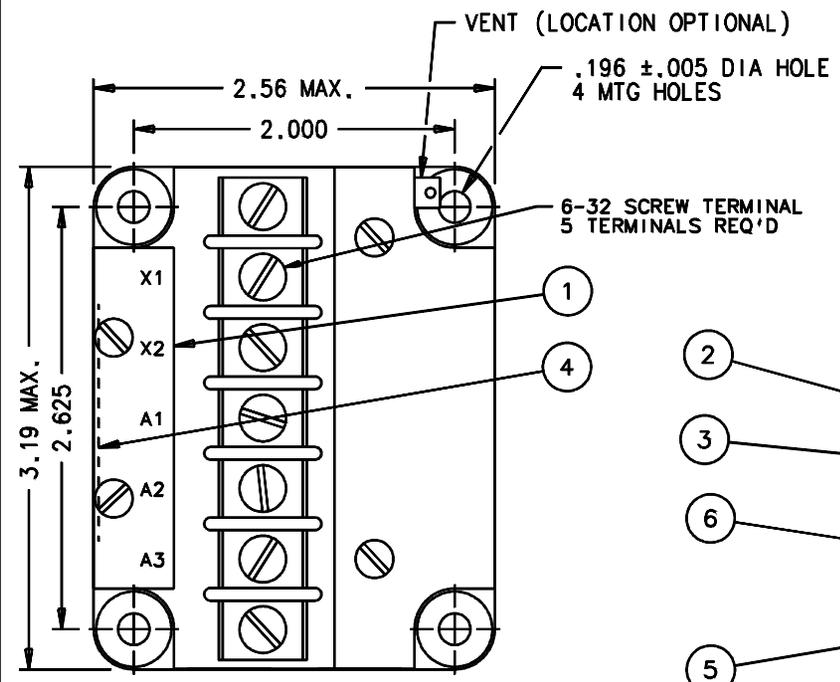

CONSTRUCTION DUST PROOF GASKET SEALED

OPERATING VOLTAGE 120 V 400 HZ
CONTINUOUS DUTY 97±3 VAC
PICKUP VOLTAGE 85±3 VAC T.D. 40±10 MS ON DROP-OUT
DROPOUT VOLTAGE 3 AMP RESISTANCE AT 28 VDC
CONTACT RATING 2 AMP INDUCTIVE AT 28 VDC
 1 AMP LAMP

ENVIRONMENTAL
TEMP OPERATING -55°C TO +71°C
VIBRATION .060 DA 5 TO 55 HZ
10g CONTANT ACCELERATION 55 - 2,000 HZ

MAX. WEIGHT 10 OZ.

W/D No. 32667

6	4	51200-020	SCREW - 4 X 1/4 PAN HD			S.STEEL
5	1	32684-010	PRIMARY ASSEMBLY			
4	1	32490-001	PLATE - WIRING DIAGRAM			
3	1	20502-003	PLATE-NAME			
2	1	16762-001	PLATE-BASE COVER			
1	1	15662-013	PLATE-BASE COVER			
FIND NO	QTY REQD	PART OR IDENTIFYING NO	NOMENCLATURE OR DESCRIPTION	FSCM NO	DRAWING OR SPECIFICATION	MATERIAL OR NOTE
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON			 Hartman Division • 175 N. DIAMOND STREET • MANSFIELD, OHIO 44802			
2 PL DEC., 3 PL DEC., ANGLES						
.06 .010 .1°			DR BY RES 73/08/30 CHK BY RS 73/08/30 ENGR DH 73/08/30 MFG MB 06/03/06			
MATERIAL			UNDER VOLTAGE-SENSOR 093			
SIZE C			CODE IDENT 74063			
SCALE NONE			SHEET DWG NO. E-308P			
			REF TYCO P/N 1616126-5			