
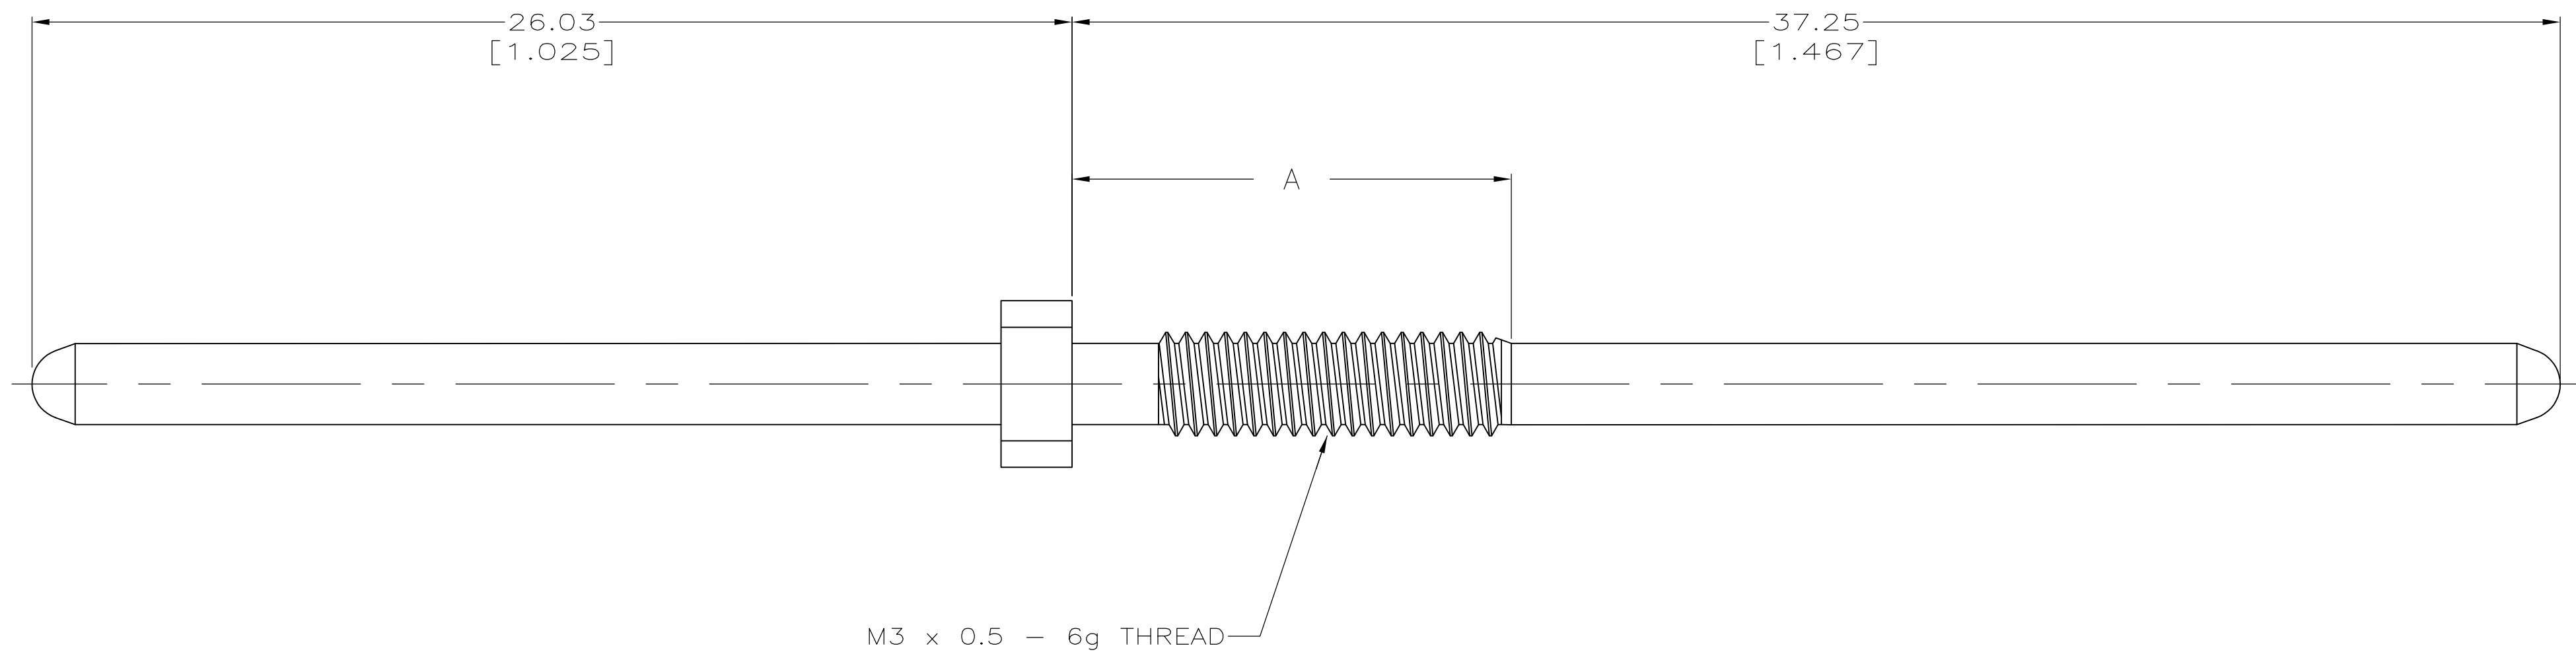




- | | |
|---|---|
| 1 | BRASS PER AMP SPECIFICATION 100-110 1/2 HARD OR
BRASS PER AMP SPECIFICATION 100-380 1/4 HARD. |
| 2 | CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS. |
| 3 | RECOMMENDED HOLE SIZE 3.1mm. |

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN DK SCHURM	25AUG99	 TE Connectivity			
DIMENSIONS: mm [INCHES]		CW HW ANDREWS	NAME				
TOLERANCES, UNLESS OTHERWISE SPECIFIED:		APVD HW ANDREWS	GUIDE PIN, STATIC DISCHARGE				
		PRODUCT SPEC					
MATERIAL		APPLICATION SPEC	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
		WEIGHT —	A1	00779	C=120759	—	
		CUSTOMER DRAWING		SCALE	8:1	SHEET 1 of 1	REV B