



DIMENSIONS mm (inches)

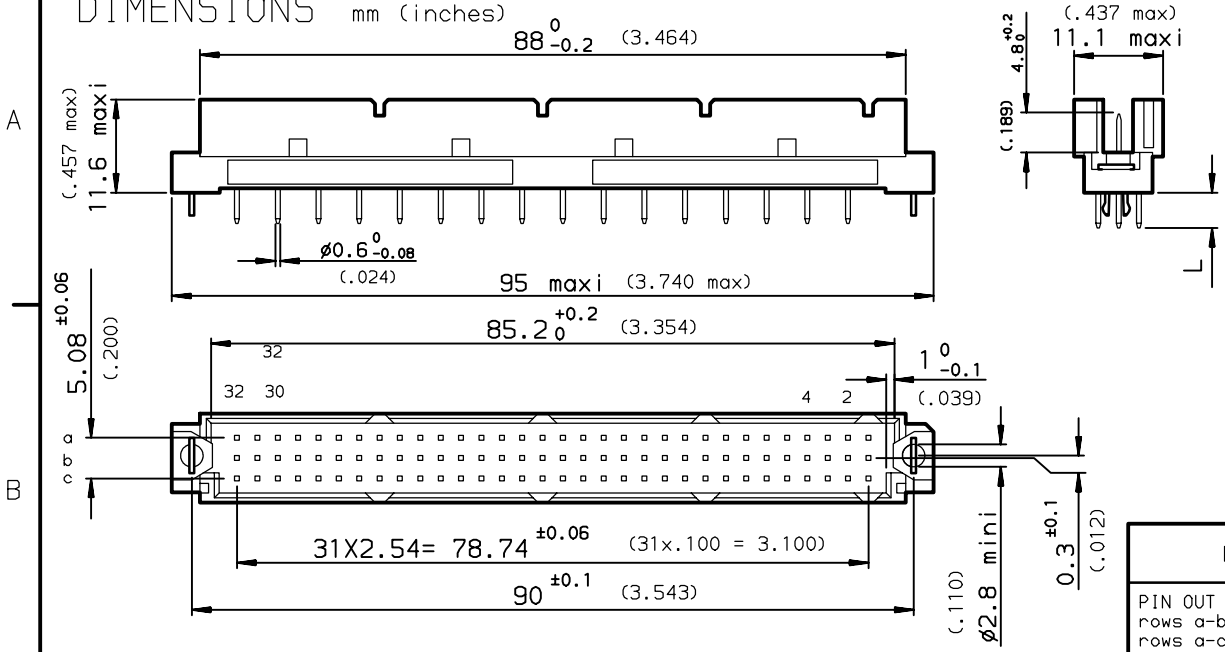

PCB DRILLING
component side

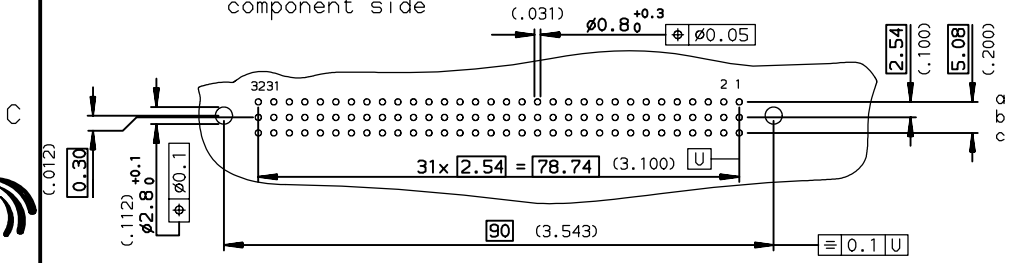

PART NUMBER	8609			78				8	
PIN OUT									
rows a-b-c				3				48	
rows a-c				4				32	
NUMBER OF CONTACTS									
TERMINATION									
L = 2.70 ±0.25 (.106)								24	
L = 4.65 ±0.25 (.183)								14	
OPTIONS									
no option								7	
with harpoons								H	
								A	
								R	
PERFORMANCE CLASS									
DIN 41612 class 3								4	
DIN 41612 class 2								5	
DIN 41612 class 1								6	
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

European Views

www.fciconnect.com			surface ISO 1302			tolerance std ISO 406 ISO 1101		projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED											
Dr	ROUILLARD	1997/10/27	ANGULAR	LINEAR	0.X		±0.1		size A3	Scale 1.5	
Eng	TARON	1997/10/27			0.XX		±0.1				
Chr	LEGARE	1997/10/27			0.XX' ±2'		0.XXX				
Appr	LEGARE	1997/10/27	Product family				DIN 8609		Spec ref -		
			title STRAIGHT MALE - STYLE R SOLDER TO BOARD				chg no C-8609-0641			Rev. C	
catalog no			-				CUSTOMER			sheet 1 of 1	