

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20




© COPYRIGHT 20

BY -



ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	08JUN2015	DL	CW

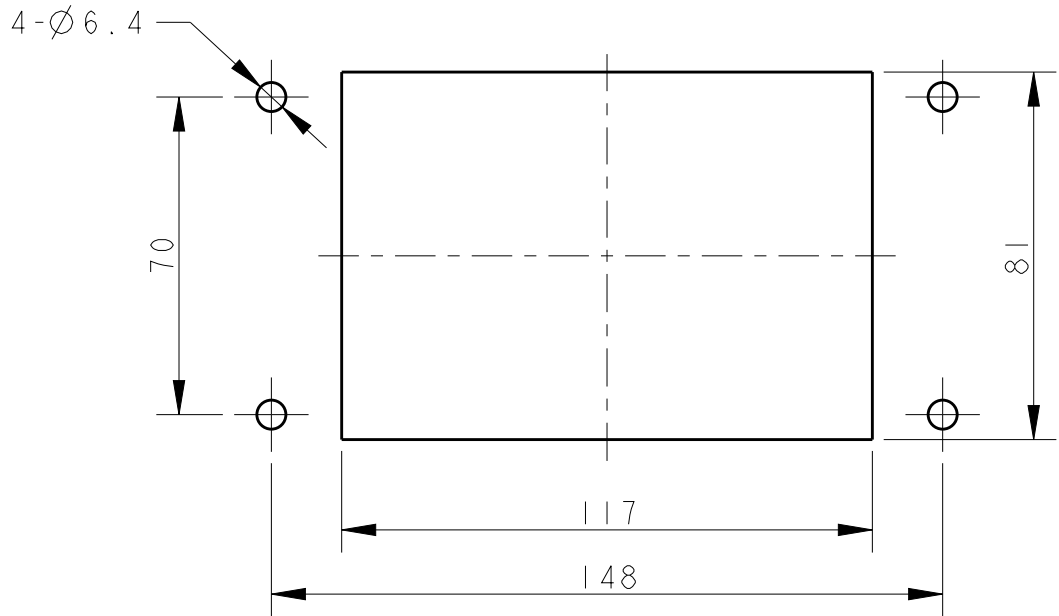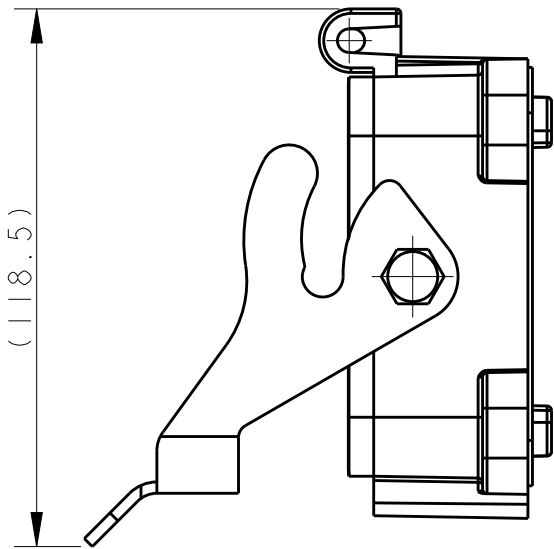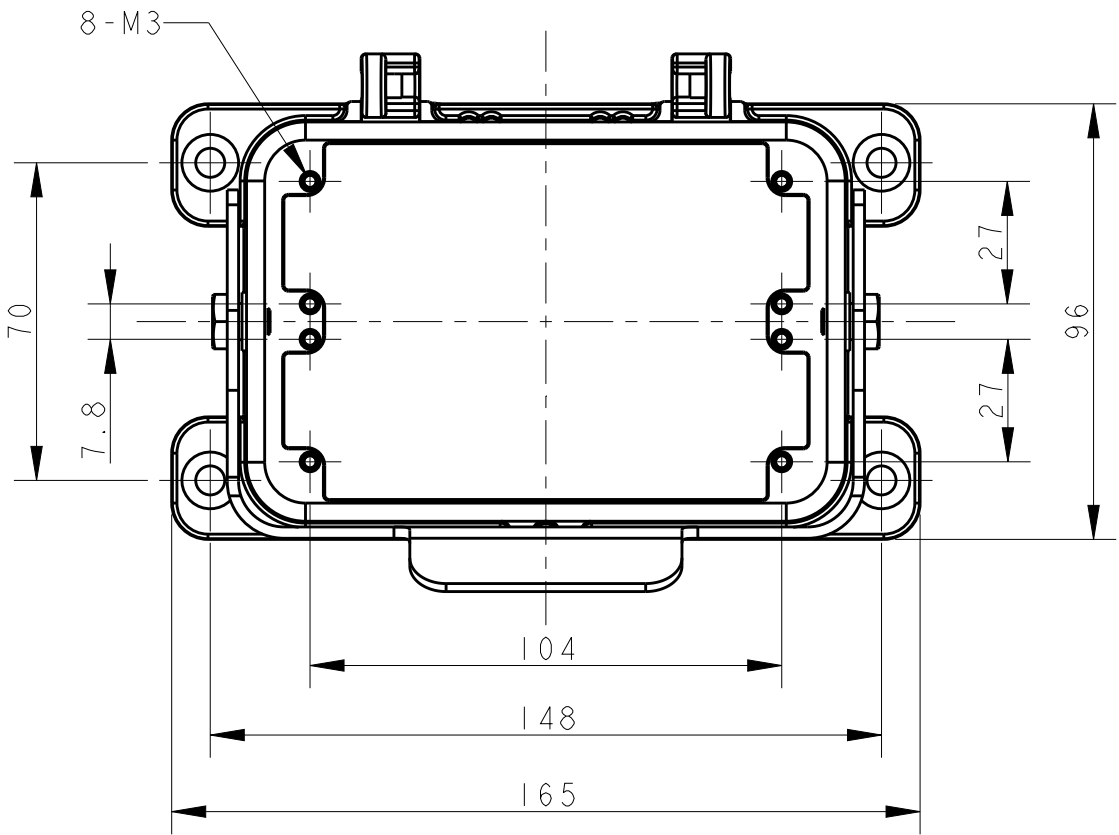


开孔安装示意图
PANNEL CUT OUT

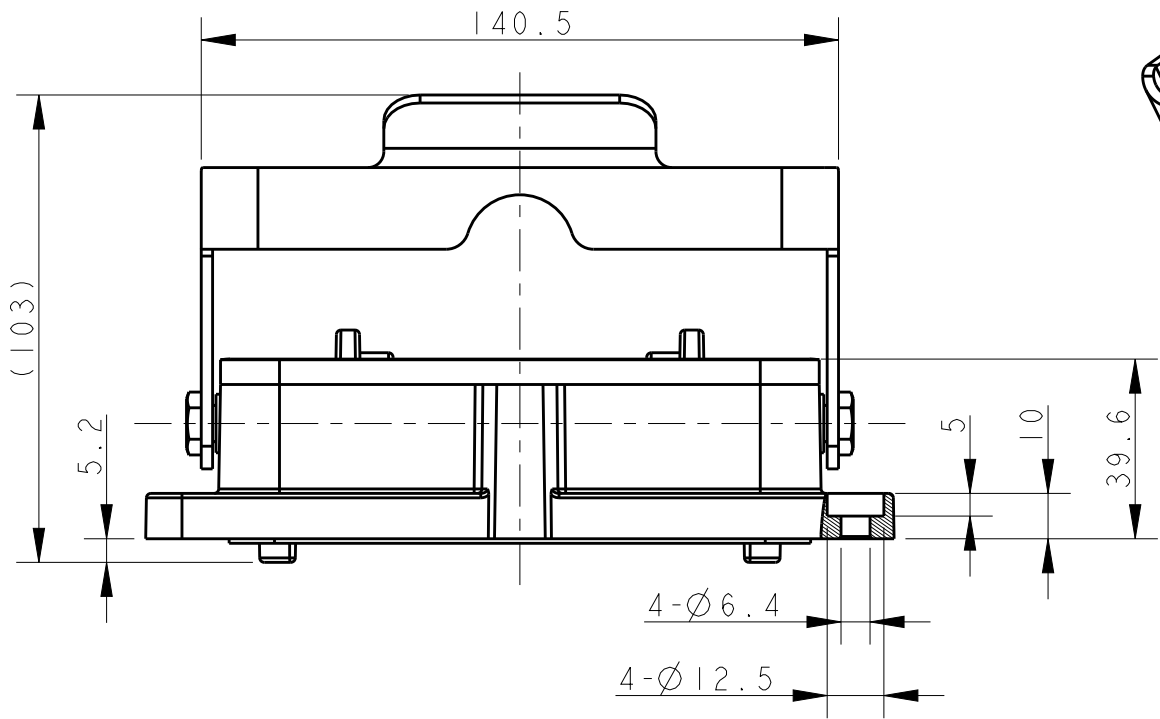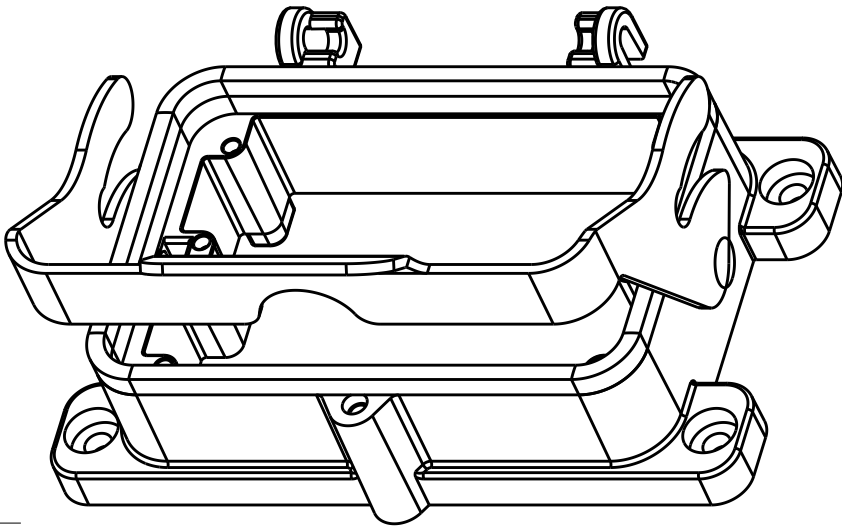

NOTES:
1. TECHNICAL CHARACTERISTICS:
BODY MATERIAL: DIE CAST ALUMINIUM ALLOY
SURFACE TREATMENT: POWDER-COATED, GRAY
OPERATION TEMPERATURE: -40-+125°C
DEGREE OF PROTECTION: IP65 (MATED)

注释:
1. 技术参数:
主体材料: 铝合金
表面处理: 粉末喷涂, 灰色
工作温度: -40-+125°C
防护等级: IP65(配合)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DAVID LI 08JUN2015	 TE Connectivity		
		CHK CHRIS WANG 08JUN2015			
		APVD XU XIANG 08JUN2015			
		PRODUCT SPEC 108-137013			
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	NAME H48B-AG-LB		
		0 PLC ±-	SIZE A3		
		1 PLC ±-			
		2 PLC ±-			
		3 PLC ±-			
MATERIAL		FINISH	CAGE CODE		
			DRAWING NO		
			RESTRICTED TO		
			SCALE		
			SHEET		
			OF		
			REV		
			A		

TI500482000-000	H48B-AG-LB
ASSEMBLY PART NUMBER	ASSEMBLY PART DESCRIPTION