





REVISIONS				
REV	ECO	DESCRIPTION	DATE	BY APPR
A1	-	RELEASED DRAWING	Nov-9-17	Rookie Tommy
A2	-	ADD THE G5 PART NUMBER	Jan-28-19	Blink Tommy
A3	-	CHANGE HAND CRIMPER	Nov-8-19	Flan Tommy

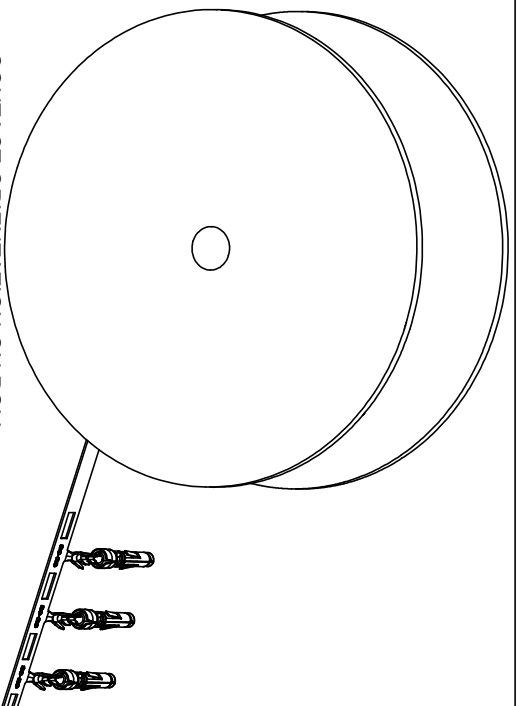

CONTACT ORIENTATION ON ROLL
 NOTES: (UNLESS OTHERWISE SPECIFIED)

- MATERIAL:
 - CONTACT BODY: COPPER ALLOY.
 - OUTER SPRING: STAINLESS STEEL.
- SPECIFICATIONS:
 - CURRENT RATING: 5A MAX.
 - TERMINATION TYPE: CRIMPING.
 - WIRE RANGE: 30~28AWG.
 - WIRE INSULATION DIA(MAX): \varnothing 1.8mm.
- ROHS COMPLIANT.
- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.
- AVAILABLE TOOLS:
 - HAND CRIMPER: MFX-3958. ^(A3)
 - CRIMP APPLICATOR: MFX-3957.
 - EXTRACTION TOOL: QXRT20.

P/N	CONTACT PLATING(MATING AREA)
SS28W2T	TIN PLATING OVER NICKEL.
SS28W2N	NICKEL PLATING OVER COPPERIZE.
SS28W2F	GOLD FLASH PLATING OVER NICKEL.
SS28W2G5	5 μ " GOLD PLATING OVER NICKEL.
SS28W2G10	10 μ " GOLD PLATING OVER NICKEL.
SS28W2G15	15 μ " GOLD PLATING OVER NICKEL.
SS28W2G30	30 μ " GOLD PLATING OVER NICKEL.

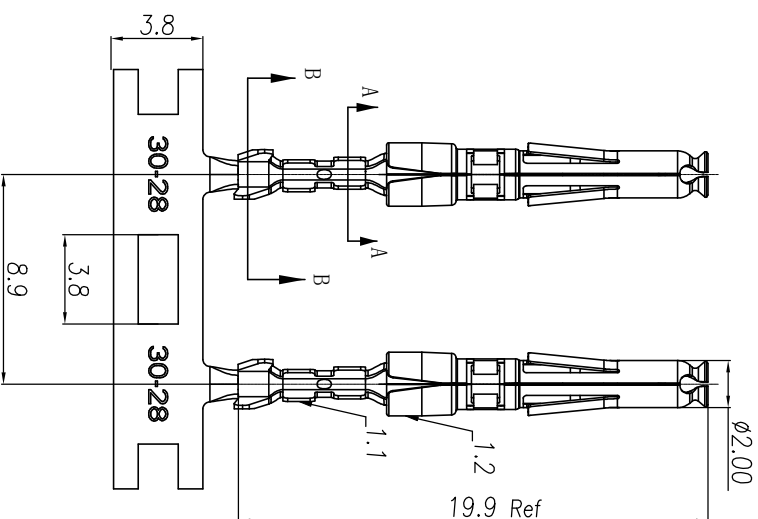

QUANTITY	PART NUMBER	DESCRIPTION	ITEM
		MATERIALS LIST	

UNLESS OTHERWISE SPECIFIED			
1) All dimensions are in millimeters.	DRAWN: Ril	DATE: Nov-8-19	THE DRAWING IS SUPPLIED FOR INFORMATION ONLY. SPECIFICATIONS AND PERFORMANCE DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE MANUFACTURER ASSUMES NO RESPONSIBILITY FOR REPRODUCTION ERRORS. ALL DIMENSIONS ARE IN MILLIMETERS UNLESS OTHERWISE SPECIFIED. MATERIAL SPECIFICATIONS: Tommy Nov-8-19 APPROVE: Tommy
2) Tolerances are as follows: 1 Pt. DEC 0.010 2 Pt. DEC 0.015 3 Pt. DEC 0.018	CHECKED: Mah	DATE: Nov-8-19	
3) Note reference =	ENGINEER: Tommy	DATE: Nov-8-19	

PROCESS SPECIFICATIONS		SIZE		SCALE	
NEXT ASBY		B	C-	NONE	NONE
ECO-MATE SOCKET CONTACT, STAMPED, 28-30AWG, SIZE 20		SS28W2XX		A3	