

2 W

DC-12.4GHz


SMA

COAXIAL ATTENUATOR

issue
28. jul. 93

Page
1 / 1

DRAWING

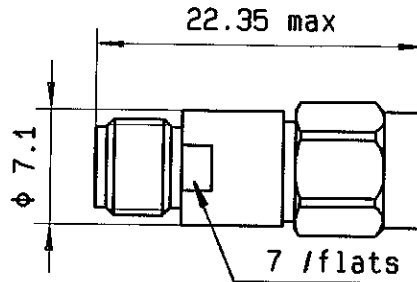

General tolerances: +/- 0.5 mm

R F CHARACTERISTICS

FREQUENCY RANGE : DC - 12.4 GHz
 IMPEDANCE : 50 Ohms
 ATTENUATION - NOMINAL : 8 dB

FREQUENCY	DC- 4 GHz	4 -12.4GHz
V.S.W.R	<= 1.15	<= 1.25
DEVIATION (dB)	+0.4 / -0.4	+0.4 / -0.4

TEMPERATURE SENSITIVITY : $4 * 10^{-4}$ dB / (dB * °C)
 PEAK POWER at 25°C (1µs, 1%.) : 100 W
 AVERAGE POWER at 25°C : 2 W


MECHANICAL CHARACTERISTICS

CONNECTORS : SMA male/female per MIL-C 39012
 WEIGHT : < 5 g

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE (°C) : -55 , +125
 STORAGE TEMPERATURE RANGE (°C) : -55 , +125

Power derating
Versus temperature

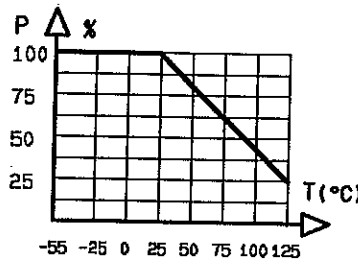

This information is given as an indication. In the continual goal to improve our products, we reserve the right to make any modifications judged necessary

QUALITY
Dpt app **B**
 CREATION
 PEN : CAT
 EP :
 Nom : DP
 Date : 02. mar. 89

28. jul. 93
 New format

ISSUE

REVISIONS

VE
 NAME

RADIALL®

101. Philibert Hoffmann | Phone: 33.1.49353635
 - Z.I Ouest - | Fax : 33.1.48546363
 93115 ROSNY/BOIS Cedex-FRANCE | Tlx RADIA 235220F