

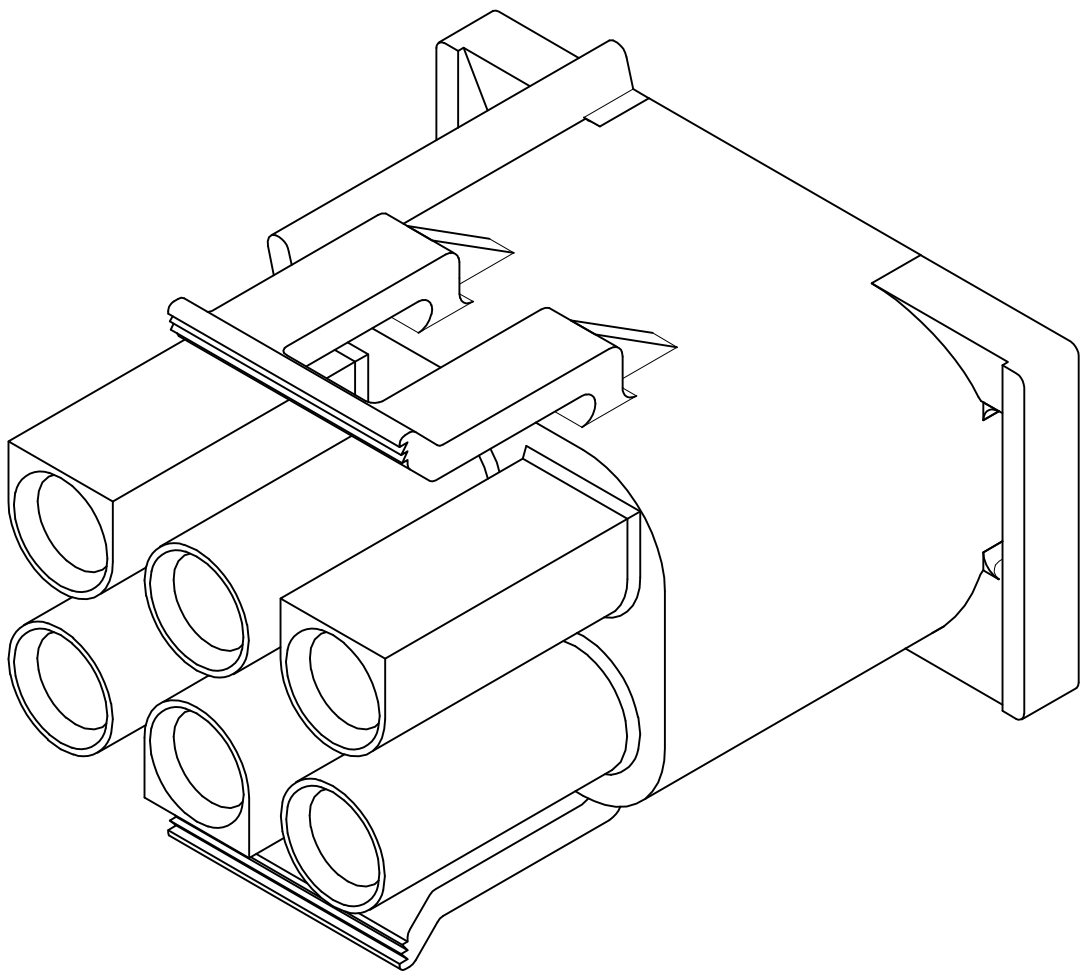
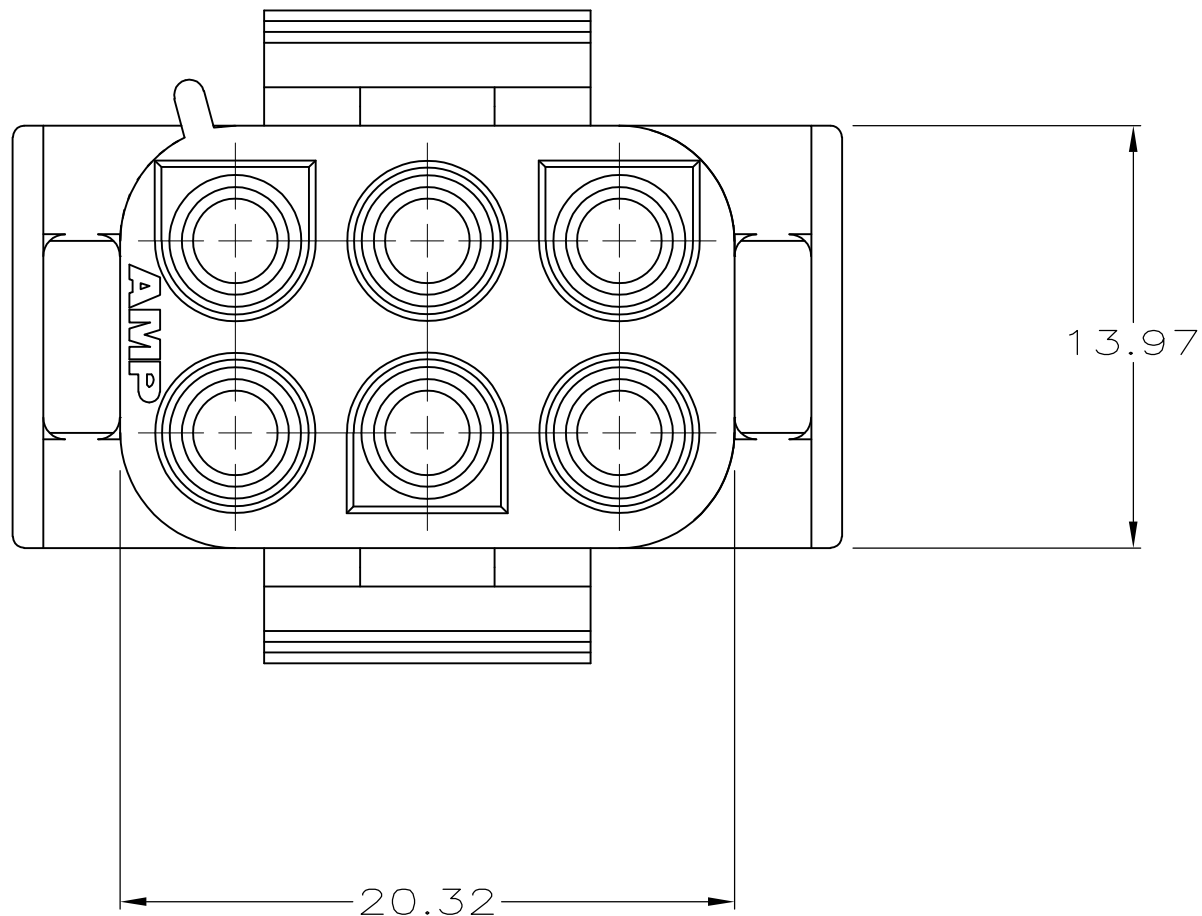
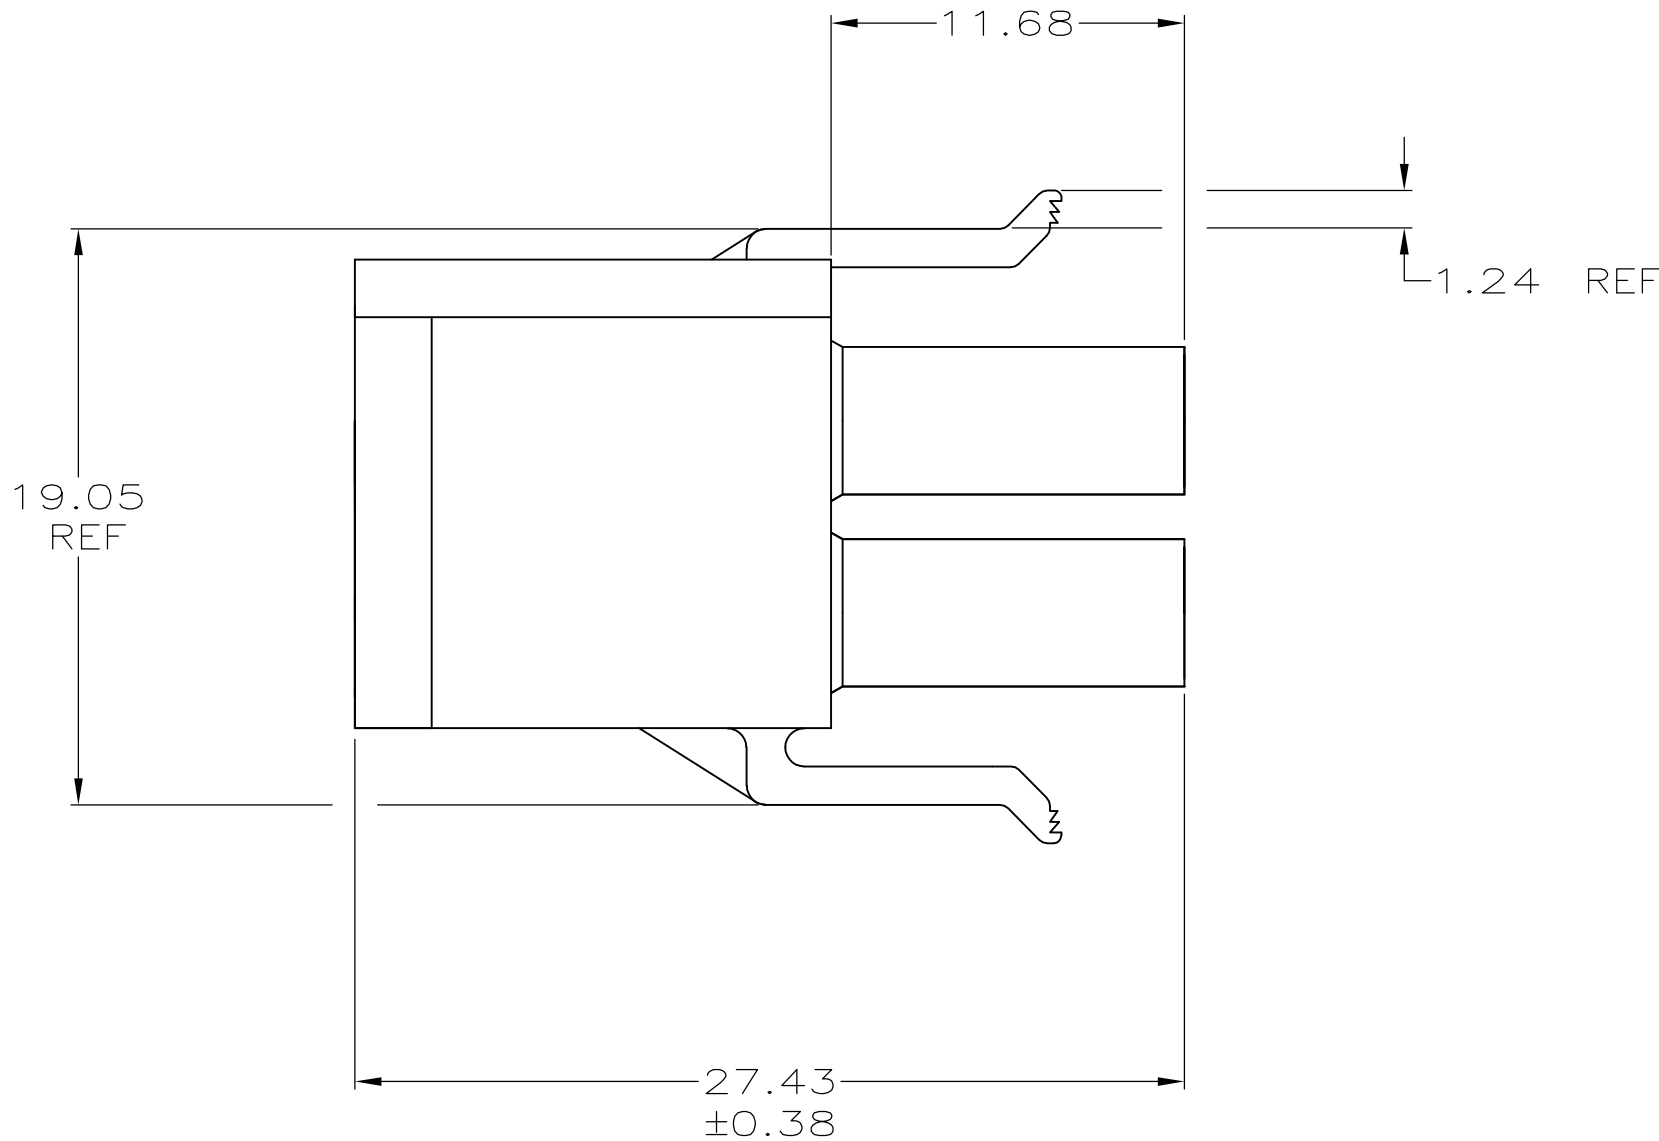


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECO-17-011927	22AUG2017	RS	KR


1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK™ CAP OR HEADER.
2. SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS [1.0 LBS]. NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS [.5 LBS].
3. DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED CONDITION ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
- ⚠ SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION.

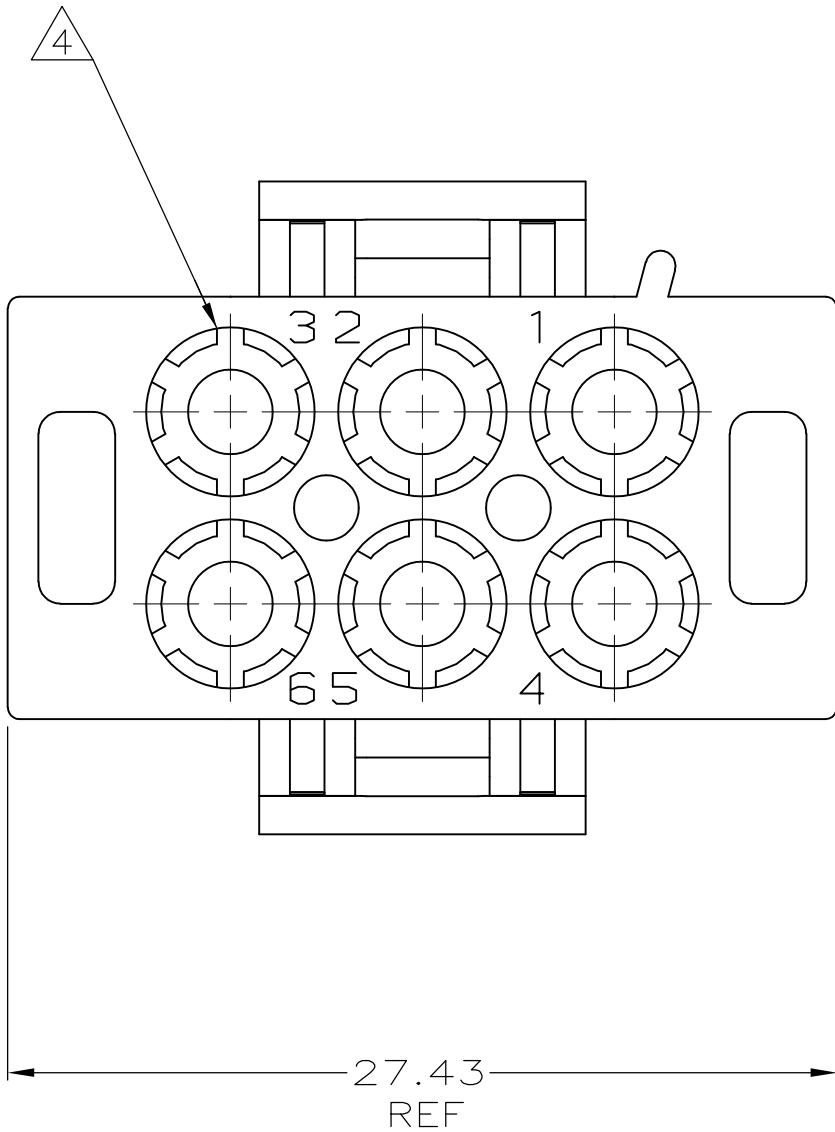

3-DIMENSIONAL MODEL
NTS

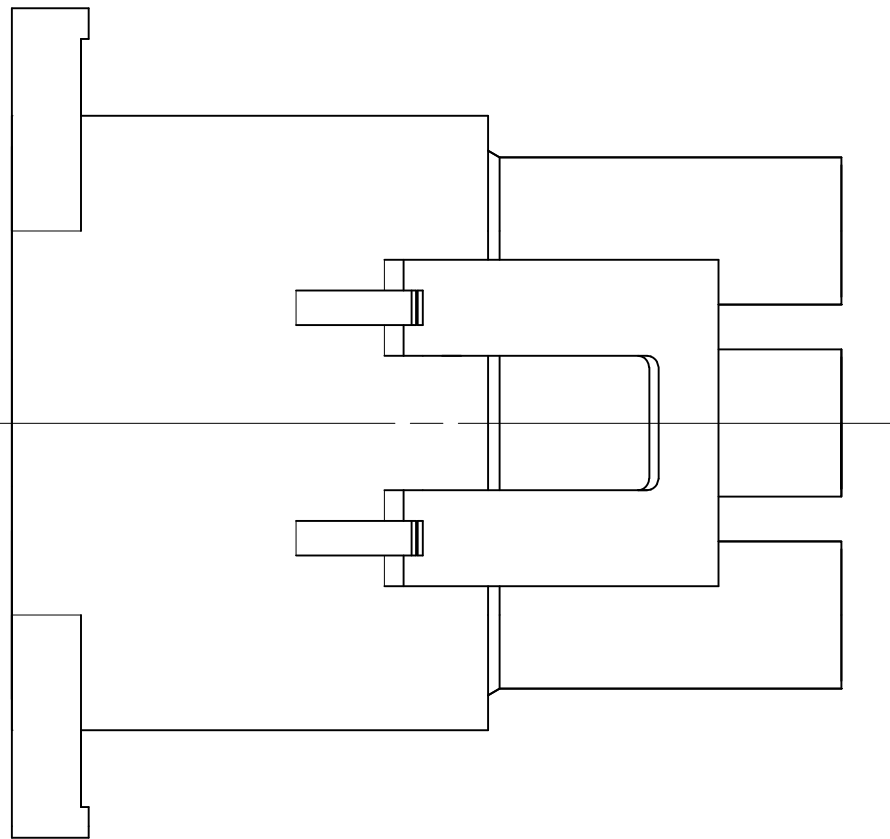

27.43	1.080
20.32	.800
19.05	.750
13.97	.550
11.68	.460
1.24	.049
0.38	.015
0.13	.005
MM	IN
CONVERSION TABLE	

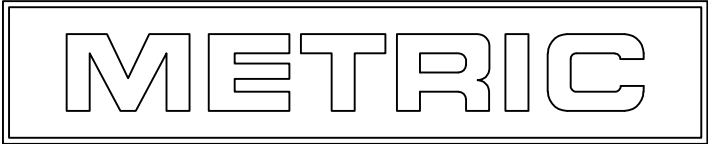

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 12-05-95	794096-1 PART NUMBER	
DIMENSIONS: mm		CHK R. SWING 12-05-95	TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0. PLC ± - 1. PLC ± - 2. PLC ± 0.13 3. PLC ± - 4. PLC ± - ANGLES 30°-90°		APVD D. SELF 12-06-95	NAME PLUG, SHORT LATCH,6 CIRCUIT, UNIVERSAL MATE-N-LOK	
MATERIAL NYLON,		FINISH -	SIZE A1	CAGE CODE 00779
WEIGHT 0.000000		DRAWING NO 794096	RESTRICTED TO -	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1	OF 1
		REV A		