

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	29MAR2015	DL	CW
	B	ECR-15-015128	21OCT2015	DL	CW
	B1	ECR-15-016505	11NOV2015	DL	CW

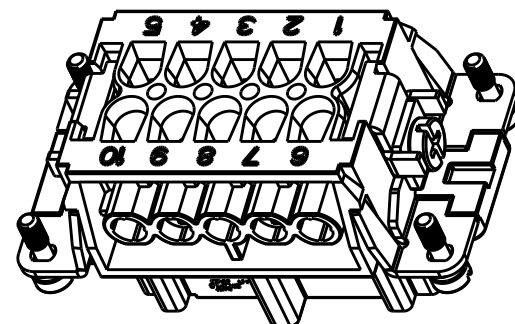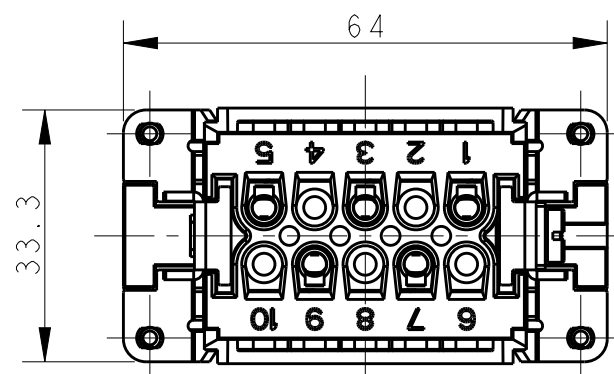

M4 THREAD  
RECOMMENDED TIGHTENING TORQUE 1.2Nm







4 X M3 THREAD  
RECOMMENDED TIGHTENING TORQUE 0.5Nm

NOTES:

- TECHNICAL CHARACTERISTICS:  
 INSULATION MATERIAL: PC  
 RATED VOLTAGE: 830 V  
 RATED CURRENT: 16 A  
 INSULATION RESISTANCE:  $\geq 400M\Omega$   
 RATED IMPULSE VOLTAGE: 8 KV  
 POLLUTION DEGREE: 3  
 FLAMMABILITY: UL94V-0  
 MATING CYCLES: 500 CYCLES  
 OPERATION TEMPERATURE:  $-40-+125^{\circ}C$   
 WIRE RANGE: 0.5-2.5 mm<sup>2</sup> (20-14 AWG)  
 CONTACT FINISH: SILVER PLATED  
 CONTACT TYPE: SCREW CONTACT

注释:

- 技术参数:  
 绝缘材料: PC  
 额定电压: 830V  
 额定电流: 16A  
 绝缘电阻:  $\geq 400M\Omega$   
 额定脉冲电压: 8 KV  
 污染等级: 3  
 阻燃等级: UL94V-0  
 插拔次数: 500次  
 工作温度:  $-40-+125^{\circ}C$   
 接线范围: 0.5-2.5 mm<sup>2</sup> (20-14 AWG)  
 端子表面处理: 镀银  
 接线类型: 螺钉压接

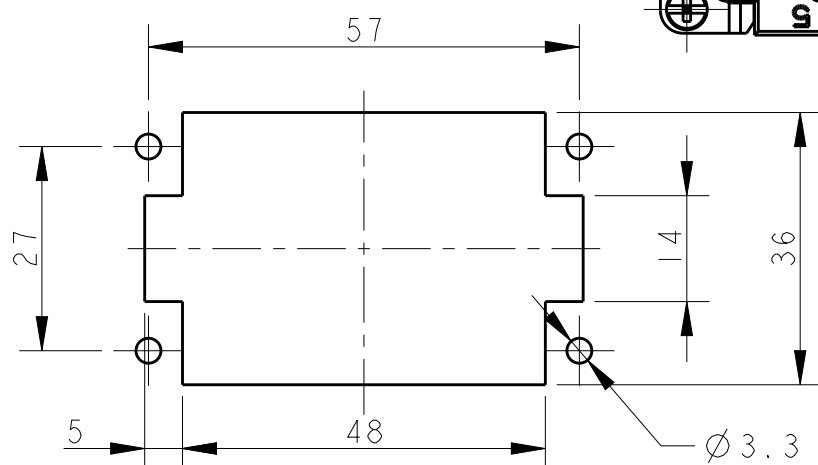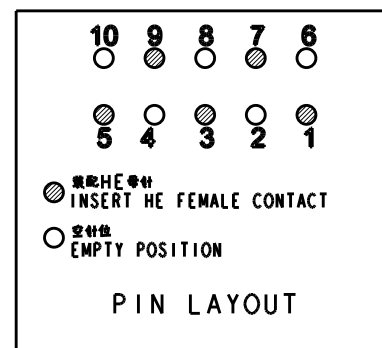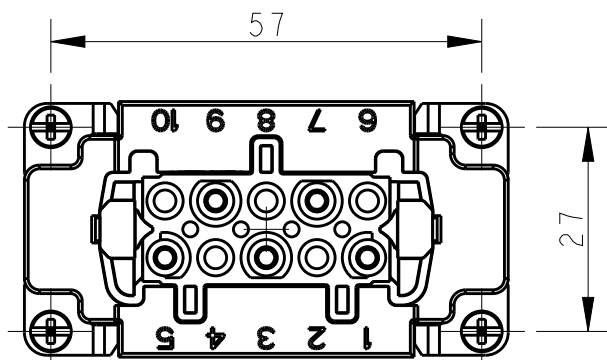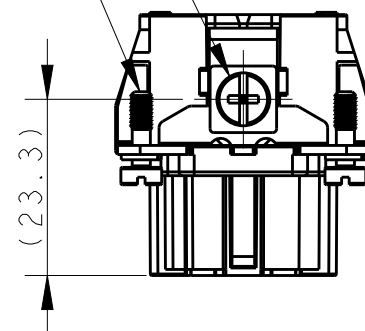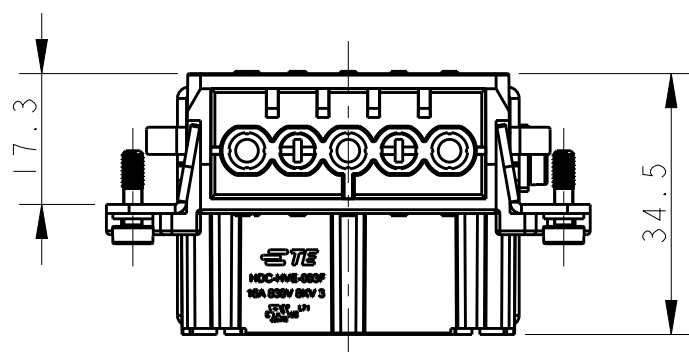

PANEL CUT OUT FOR INSERTS FOR USING WITHOUT HOODS/HOUSINGS

HVE-003-F	T2300033201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 27MAR2015 DAVID LI		TE Connectivity	
DIMENSIONS: mm		CHK 27MAR2015 CHRIS WANG			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 27MAR2015 XU XIANG		NAME HVE-003-F	
0 PLC ±-		PRODUCT SPEC		SIZE	
1 PLC ±-		108-137069		CAGE CODE	
2 PLC ±-		APPLICATION SPEC		DRAWING NO	
3 PLC ±-		114-137069		RESTRICTED TO	
4 PLC ±-		WEIGHT		SCALE	
ANGLES ±-		-		SHEET	
FINISH		-		OF	
-		-		REV	
-		-		B1	