

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
A		INITIAL RELEASE	29MAR2015	DL	CW
B		ECR-15-015128	21OCT2015	DL	CW
BI		ECR-15-016505	11NOV2015	DL	CW

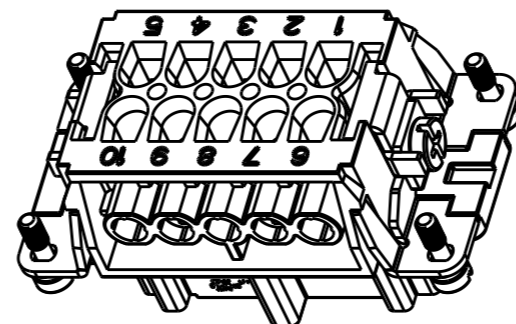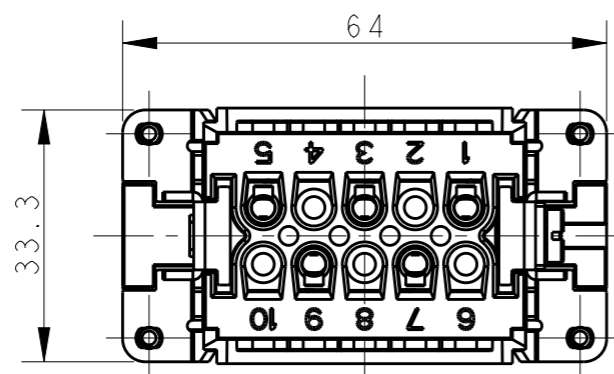

M4 THREAD
RECOMMENDED TIGHTENING TORQUE 1.2Nm







4 X M3 THREAD
RECOMMENDED TIGHTENING TORQUE 0.5Nm

NOTES:

- TECHNICAL CHARACTERISTICS:
 INSULATION MATERIAL: PC
 RATED VOLTAGE: 830 V
 RATED CURRENT: 16 A
 INSULATION RESISTANCE: $\geq 400M\Omega$
 RATED IMPULSE VOLTAGE: 8 KV
 POLLUTION DEGREE: 3
 FLAMMABILITY: UL94V-0
 MATING CYCLES: 500 CYCLES
 OPERATION TEMPERATURE: $-40-+125^{\circ}C$
 WIRE RANGE: 0.5-2.5 mm² (20-14 AWG)
 CONTACT FINISH: SILVER PLATED
 CONTACT TYPE: SCREW CONTACT

注释:

- 技术参数:
 绝缘材料: PC
 额定电压: 830V
 额定电流: 16A
 绝缘电阻: $\geq 400M\Omega$
 额定脉冲电压: 8 KV
 污染等级: 3
 阻燃等级: UL94V-0
 插拔次数: 500次
 工作温度: $-40-+125^{\circ}C$
 接线范围: 0.5-2.5 mm² (20-14 AWG)
 端子表面处理: 镀银
 接线类型: 螺钉压接

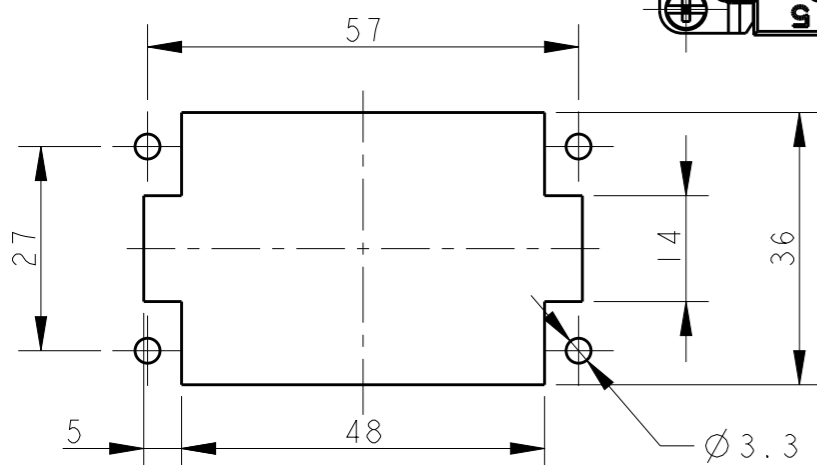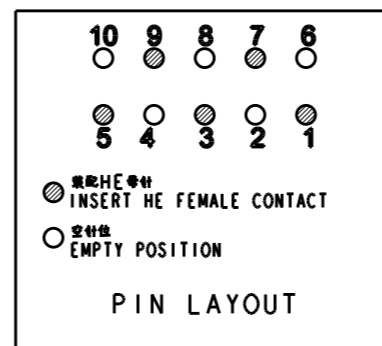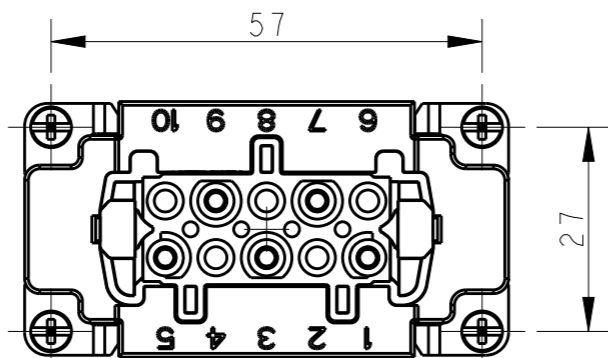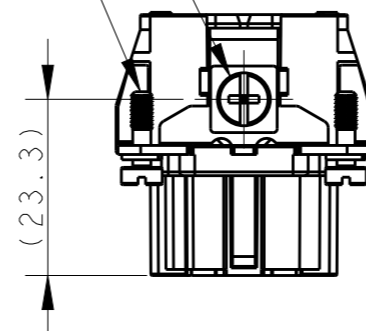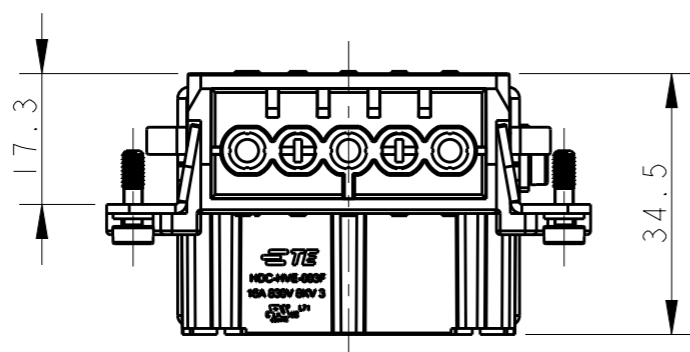

PANEL CUT OUT FOR INSERTS FOR USING WITHOUT HOODS/HOUSINGS

HVE-003-F	T2300033201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DAVID LI	27MAR2015	 TE Connectivity	
DIMENSIONS: mm		CHK	CHRIS WANG	27MAR2015		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	XU XIANG	27MAR2015		
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-		PRODUCT SPEC	108-137069			
MATERIAL	FINISH	APPLICATION SPEC	114-137069		NAME	HVE-003-F
-	-	WEIGHT	-		SIZE	A3
CUSTOMER DRAWING		SCALE	1:1		CAGE CODE	-
		DRAWING NO	T2300033201000		RESTRICTED TO	-
		SHEET	1 OF 1		REV	BI