
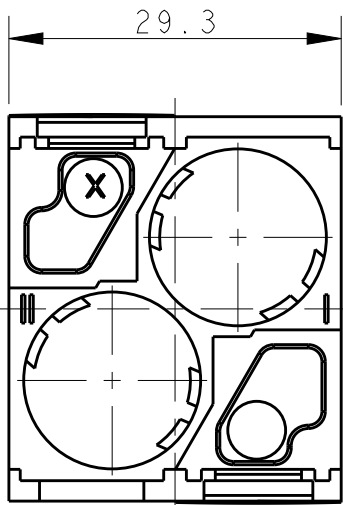
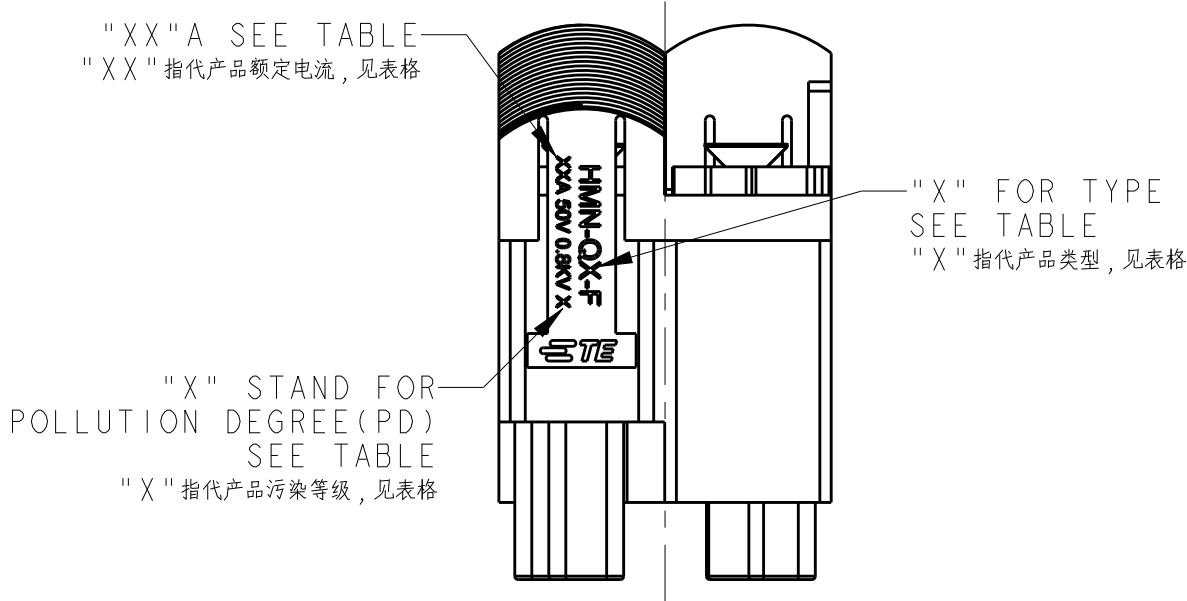
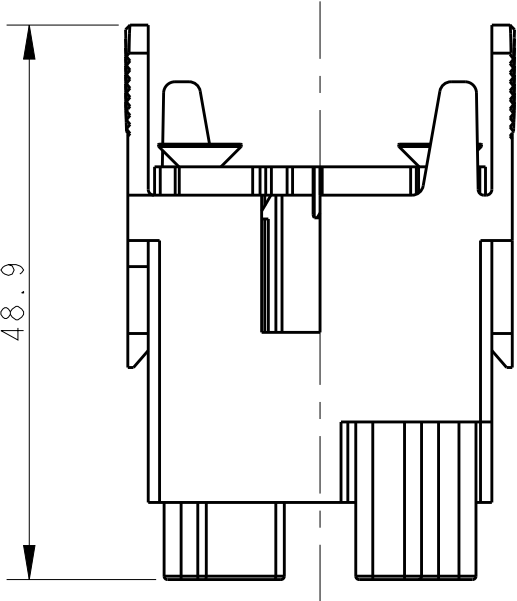
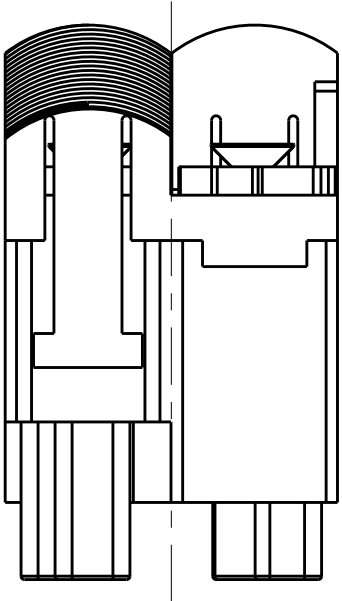
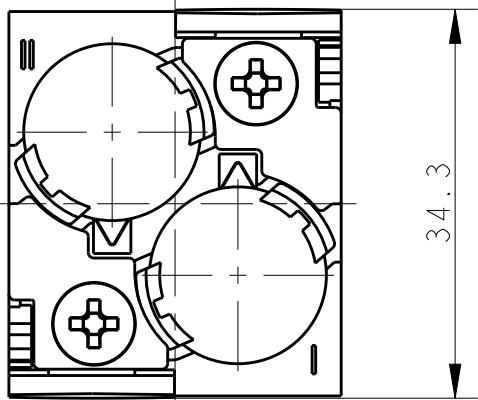


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	B	INITIAL	19SEP2017	YC	CW

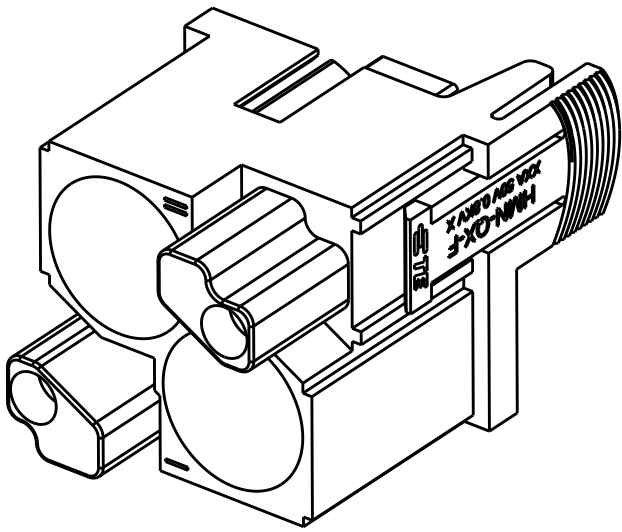

NOTES:
1. TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 50V
RATED CURRENT: SEE TABLE
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 0.8KV
POLLUTION DEGREE: SEE TABLE
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: SEE TABLE
CONTACT TYPE: CRIMP CONTACT
2. CONTACT NEED TO BE ORDERED SEPARATELY.

注释:
1. 技术参数:
绝缘材料: PC
额定电压: 50V
额定电流: 见表格
绝缘电阻: $\geq 400M\Omega$
额定脉冲电压: 0.8KV
污染等级: 见表格
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: 见表格
接线类型: 冷压接
2. 端子需要单独订购.

T2111027201-702	HMN-Q3-F	HMN-Q3 FEMALE MODULE INSERT 5A 模块母插5A	5A	2	0.08~0.52 mm ² (28~20 AWG)
T2111027201-701	HMN-Q2-F	HMN-Q2 FEMALE MODULE INSERT 10A 模块母插10A	10A	3	0.14~2.5 mm ² (26~14 AWG)
T2111027201-007	HMN-Q1-F	HMN-Q1 FEMALE MODULE INSERT 16A 模块母插16A	16A	3	0.14~4 mm ² (26~12 AWG)
PART NUMBER 料号	"X" TYPE "X" 产品型号		"XX"A "XX"电流	"X" PD "X"污染等级	WIRE GAUGE 线规

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN YORK CHEN 19SEP2017		TE Connectivity			
DIMENSIONS: mm		CHK GINO YAO 19SEP2017					
		APVD CHRIS WANG 19SEP2017		NAME HMN-Q1/Q2/Q3-F			
		PRODUCT SPEC 108-137067					
		APPLICATION SPEC 114-137067					
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± 4 PLC ± ANGLES ± FINISH		WEIGHT -		SIZE A200779	CAGE CODE C	DRAWING NO T2111027201007	RESTRICTED TO -
MATERIAL - -		CUSTOMER DRAWING		SCALE 3:2		SHEET 1 OF 1	REV B