




SCREW
4-40 UNC / 4-40 UNC x 13

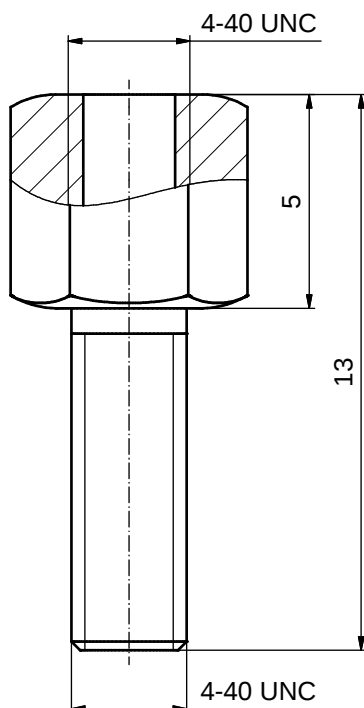


WASHER
 $\varnothing 6 / \varnothing 3 \times 0.8$



SPRING RING
DIN127 A3




NUT 4-40 UNC
SW 4,8 x 2




A SET CONSISTS OF:

2 SCREWS
2 WASHERS
2 SPRING RINGS
2 NUTS

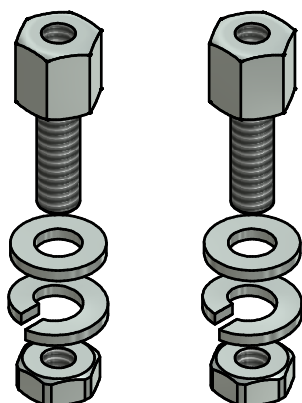

Directive 2002/95/EC RoHS compliant

SW 4,8
e=5,54



ⓑ

NOTES:

1. SCREW: STEEL; NICKEL PLATED
2. WASHER: STEEL; NICKEL PLATED
3. SPRING RING: STEEL; NICKEL PLATED
4. NUT: STEEL; NICKEL PLATED

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION.
OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

finish: SEE NOTES				tolerance		dim. in mm		scale: 8:1	
								material: SEE NOTES	
				date	name		title: SCREW LOCKING Type 1 / 4-40 UNC / 13mm		
				drawn	22.03.01	Parei			
				appd.	22.03.01	E.Mickenbecker			
				norm					
				d-old					
2 x b	Ä4522	31.10.12	Lehm.				dwg no:		DIN-A3
a	Original						16K1A166A		sh: 1
rev.	description	date	name				part no:		160X10359X

CONEC®