

20





RELEASED FOR PUBLICATION

THIS DRAWING IS UNPUBLISHED.


BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

© COPYRIGHT 20


LOC	DIST	REVISIONS					
AL	2	P	LTR	DESCRIPTION	DATE	DWN	APVD
			G	See ECR 05-017875	JAN 2006	J.S.	J.L.
			H	UPDATED TOLERANCE TABLE	FEB 2006	J.S.	J.L.

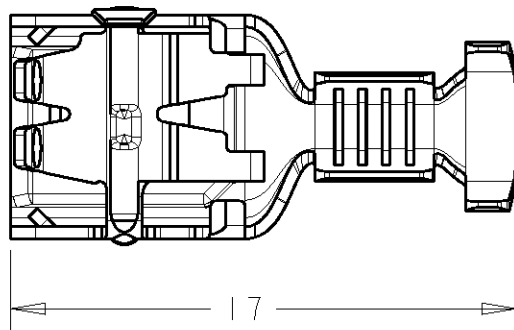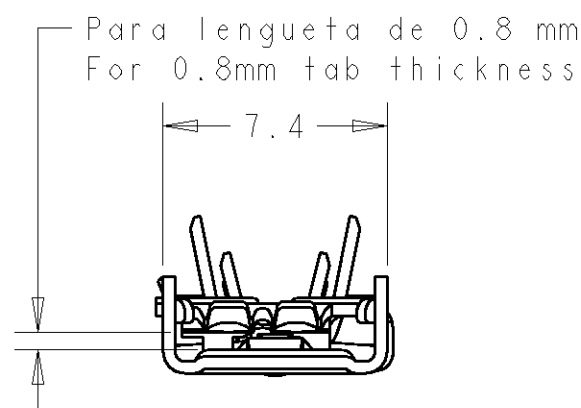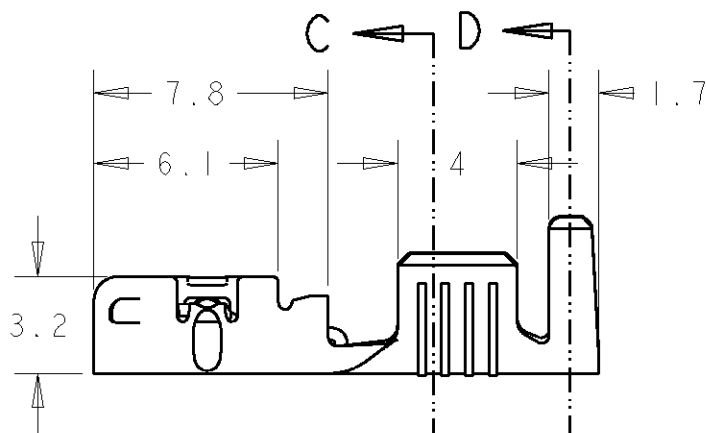


SECTION D-D
SCALE 4:1



SECTION C-C
SCALE 4:1



Left-sided
product



Right-sided
product

Rango de hilo de >1,0 a 2,5 mm²
Wire range from >1.0 to 2.5 mm²
Diámetro de aislante max 4,3 mm
Max. Insulation Diameter 4.3 mm

1644008-6	CuNiSi	Preestañado Pre-Tin
1644008-5	Latón Brass	Preestañado Pre-TiN
1644008-3	Acero Steel	Preniquelado Pre-Ni
1644008-1	Latón Brass	- Plain
Guion Dash	Material	Acabado Finish

DIMENSIONS:		DWN	22 Dec 04	MATERIAL		FINISH	
mm		J. Sal		Table		Table	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		CHK	22 Dec 04	tyco Electronics Tyco Electronics AMP España, S.A. Barcelona. Spain.			
		L. Lázaro					
		APVD	-				
0 PLC ±0.5		PRODUCT SPEC		NAME E-SPRING CONTACT 6,35 Receptaculo 6,35 Receptáculo E-SPRING CONTACT			
1 PLC ±0.5		108-22128 Brass					
2 PLC ±		108-22150 Pre-Ni Steel					
3 PLC ±		APPLICATION SPEC		SIZE A4			
4 PLC ±		114-22017					
ANGLES ±		WEIGHT		CAGE CODE		DRAWING NO	
		-		A400779		C=1644008	
		CUSTOMER DRAWING		SCALE		SHEET	
		4:		1		OF	
						REV	
						H	