


# GH1234 12V, 3.4Ah




## NON-SPILLABLE SEALED RECHARGEABLE BATTERY

☆ SPECIFICATION	☆ CHARACTERISTICS
● NOMINAL VOLTAGE : 12 V	● CAPACITY 25 °C / 77 °F
● NOMINAL CAPACITY(20 hrs) : 3.4 Ah	20 hr @ 0.17 A : 3.40 Ah
● DIMENSIONS	10 hr @ 0.306A : 3.06 Ah
TOTAL HEIGHT : 67 mm ( 2.64 inches )	5 hr @ 0.54 A : 2.72 Ah
CONTAINER HEIGHT : 60 mm ( 2.36 inches )	1 hr @ 2.04 A : 2.04 Ah
LENGTH : 134 mm ( 5.28 inches )	1 C @ 3.4 A : 1.70 Ah
WIDTH : 67 mm ( 2.64 inches )	● INTERNAL RESISTANCE( 25°C , 77 °F ) : 45 mΩ
WEIGHT : APPROX 1.42 kg (3.13 lbs )	● CHARGING VOLTAGE ( 25°C , 77 °F )
● MAX DISCHARGE CURRENT : 34 A ( 5 sec )	STANDBY USE : 2.275 ± 0.025 V/CELL
● MAX SHORT- DURATION DISCHARGE CURRENT : 102 A( 0.1 sec )	: (-3.3mV / °C / CELL)
● STANDARD TERMINALS : FO-01	CYCLE USE : 2.45 ± 0.05 V/CELL
● CONTAINER MATERIAL : GENERAL GRADE ABS	: (-5 mV / °C / CELL)
	● MAX CHARGING CURRENT : 1.02 A


**Discharge Characteristics 25 °C ( 77 °F )**

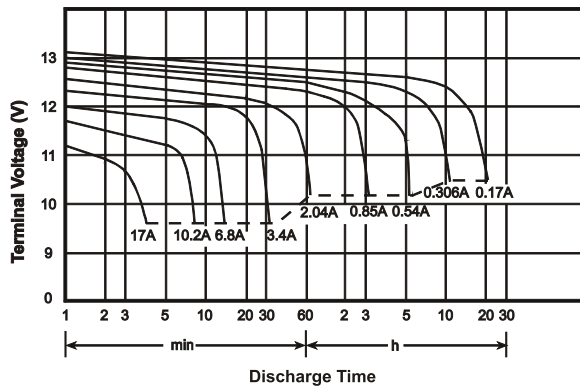

**OPEN CIRCUIT VOLTAGE VS REMAINING CAPACITY**

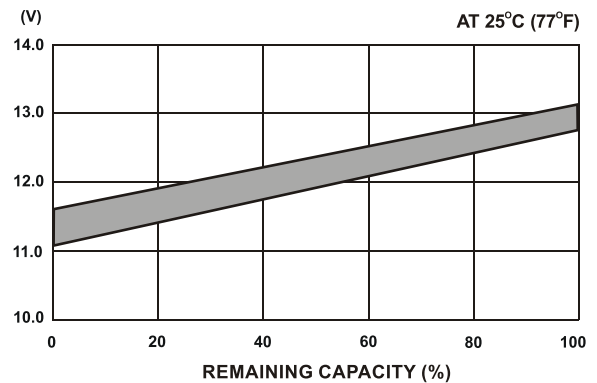

### ☆ Dimensions

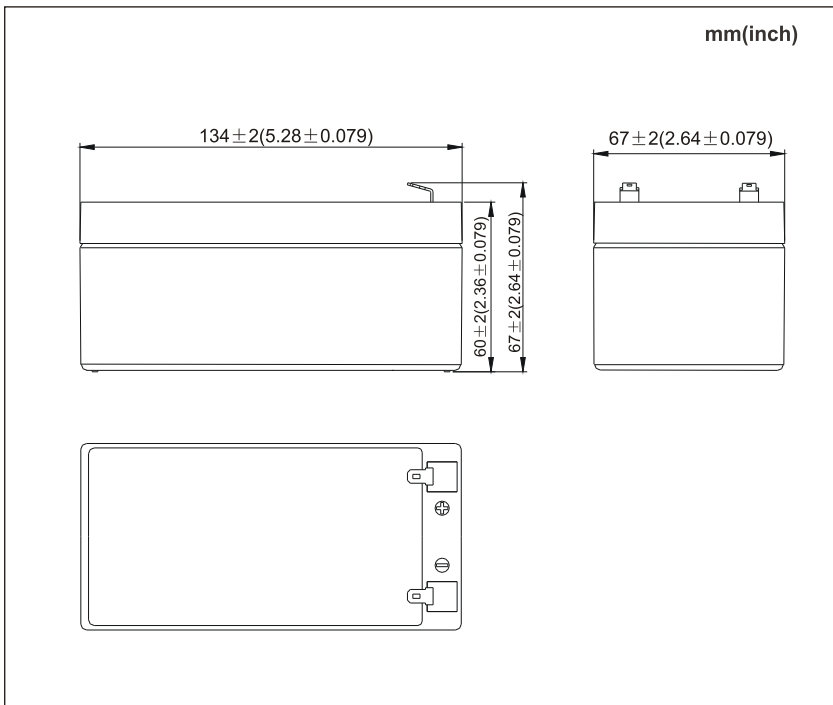

### ☆ Terminal

