

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C	REVISED PER ECO-12-006972	23AUG2012	KH	JE

- 2

PHOSPHOR BRONZE
- 3

LCP, UL94V-0
- 4

FINISH:
CONTACT MATING AREA MEETS THE PERFORMANCE REQUIREMENTS OF
TE CONNECTIVITY PRODUCT SPECIFICATION 108-1957; BASED ON
TELCORDIA GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS.
COMPLIANT PIN AREA: 0.5µm MIN MATTE TIN OVER BASE PLATING.
- 5






CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 6

REFERENCE APPLICATION SPEC 114-13020 FOR RECOMMENDED
PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 7

APPLICATION SEATING HEIGHT TO PRINTED CIRCUIT BOARD
- 8

DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 9

CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT
TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995

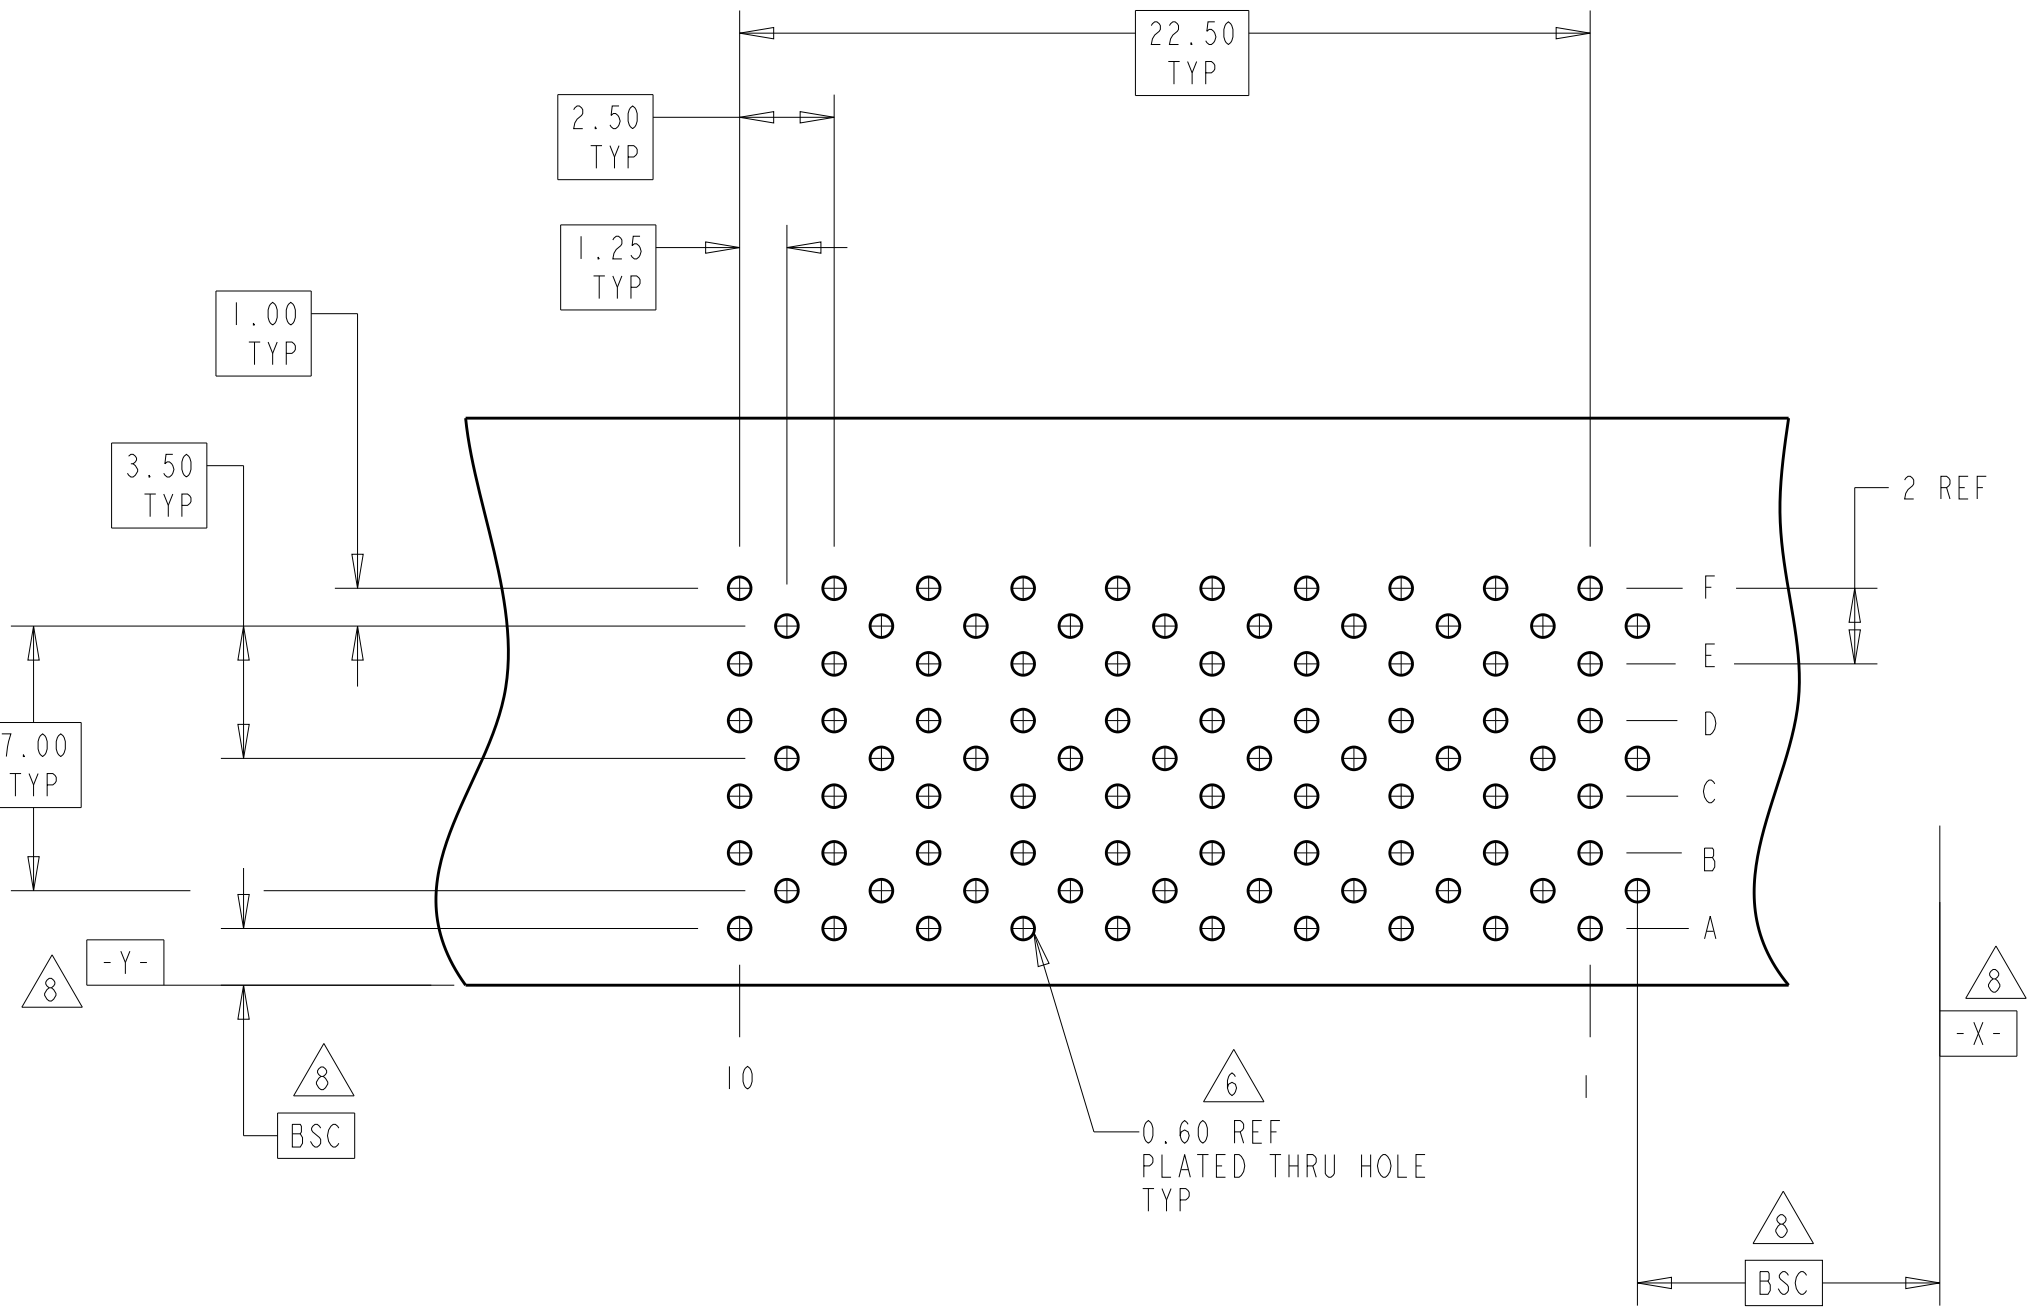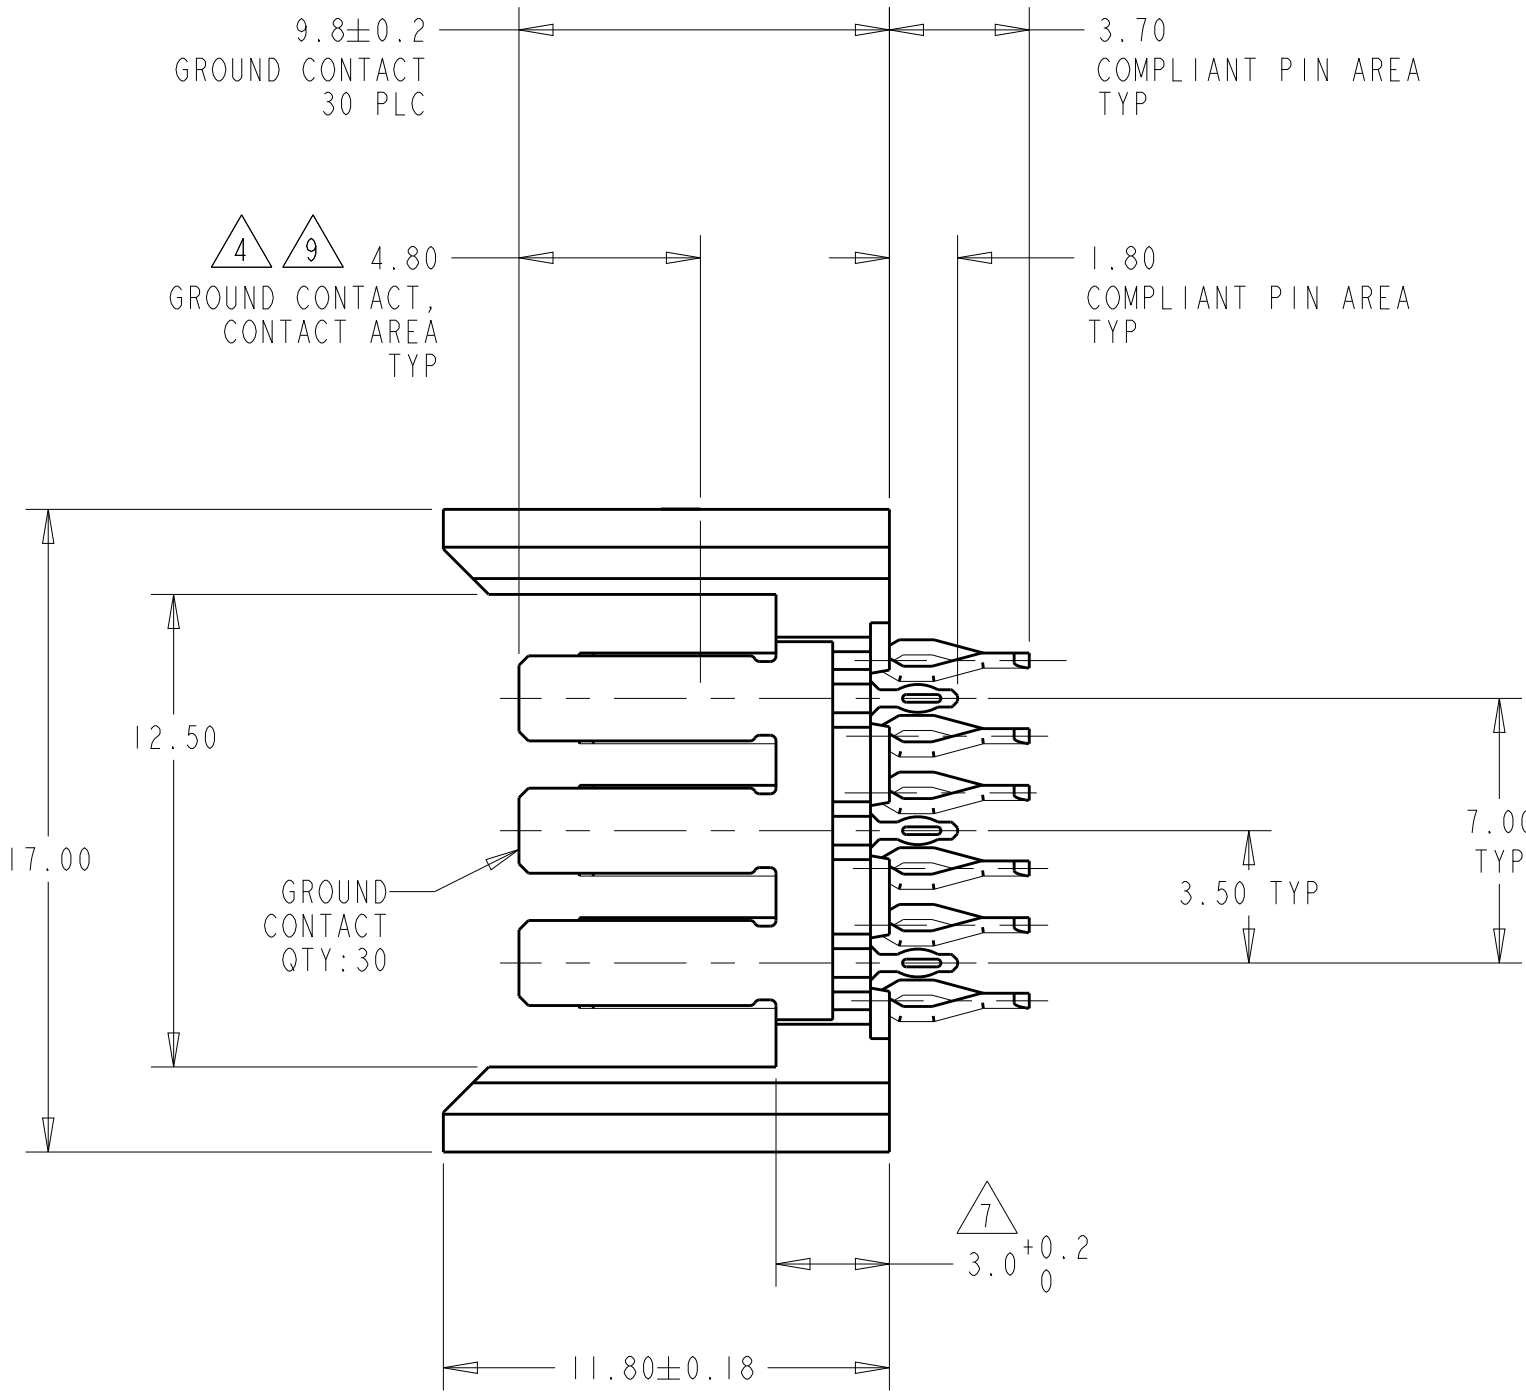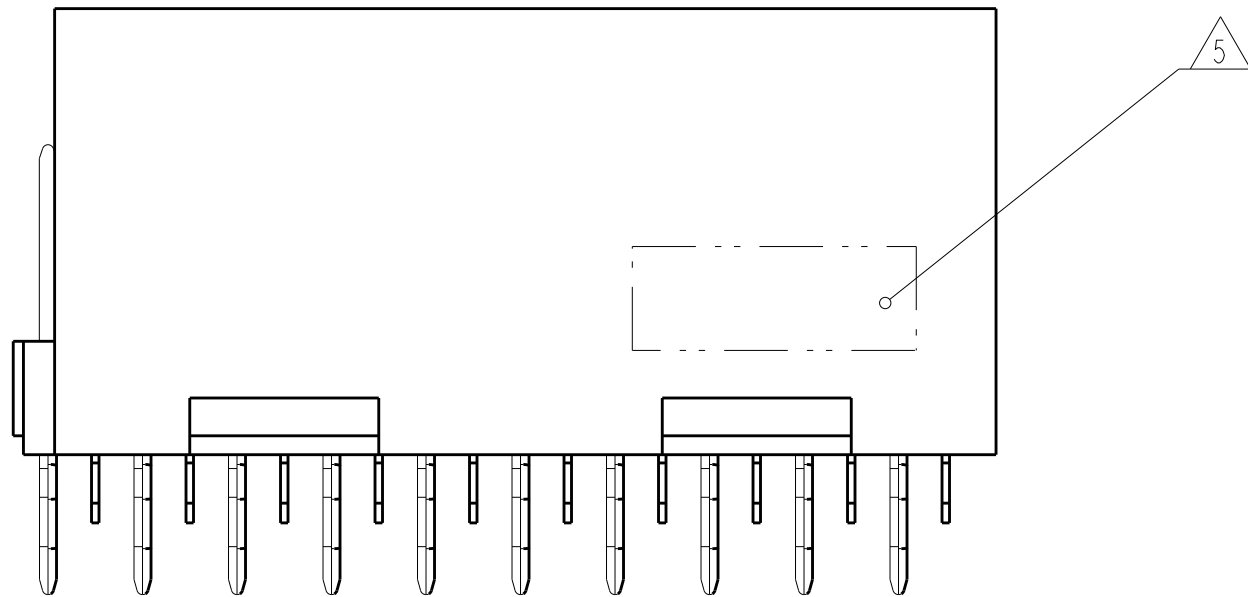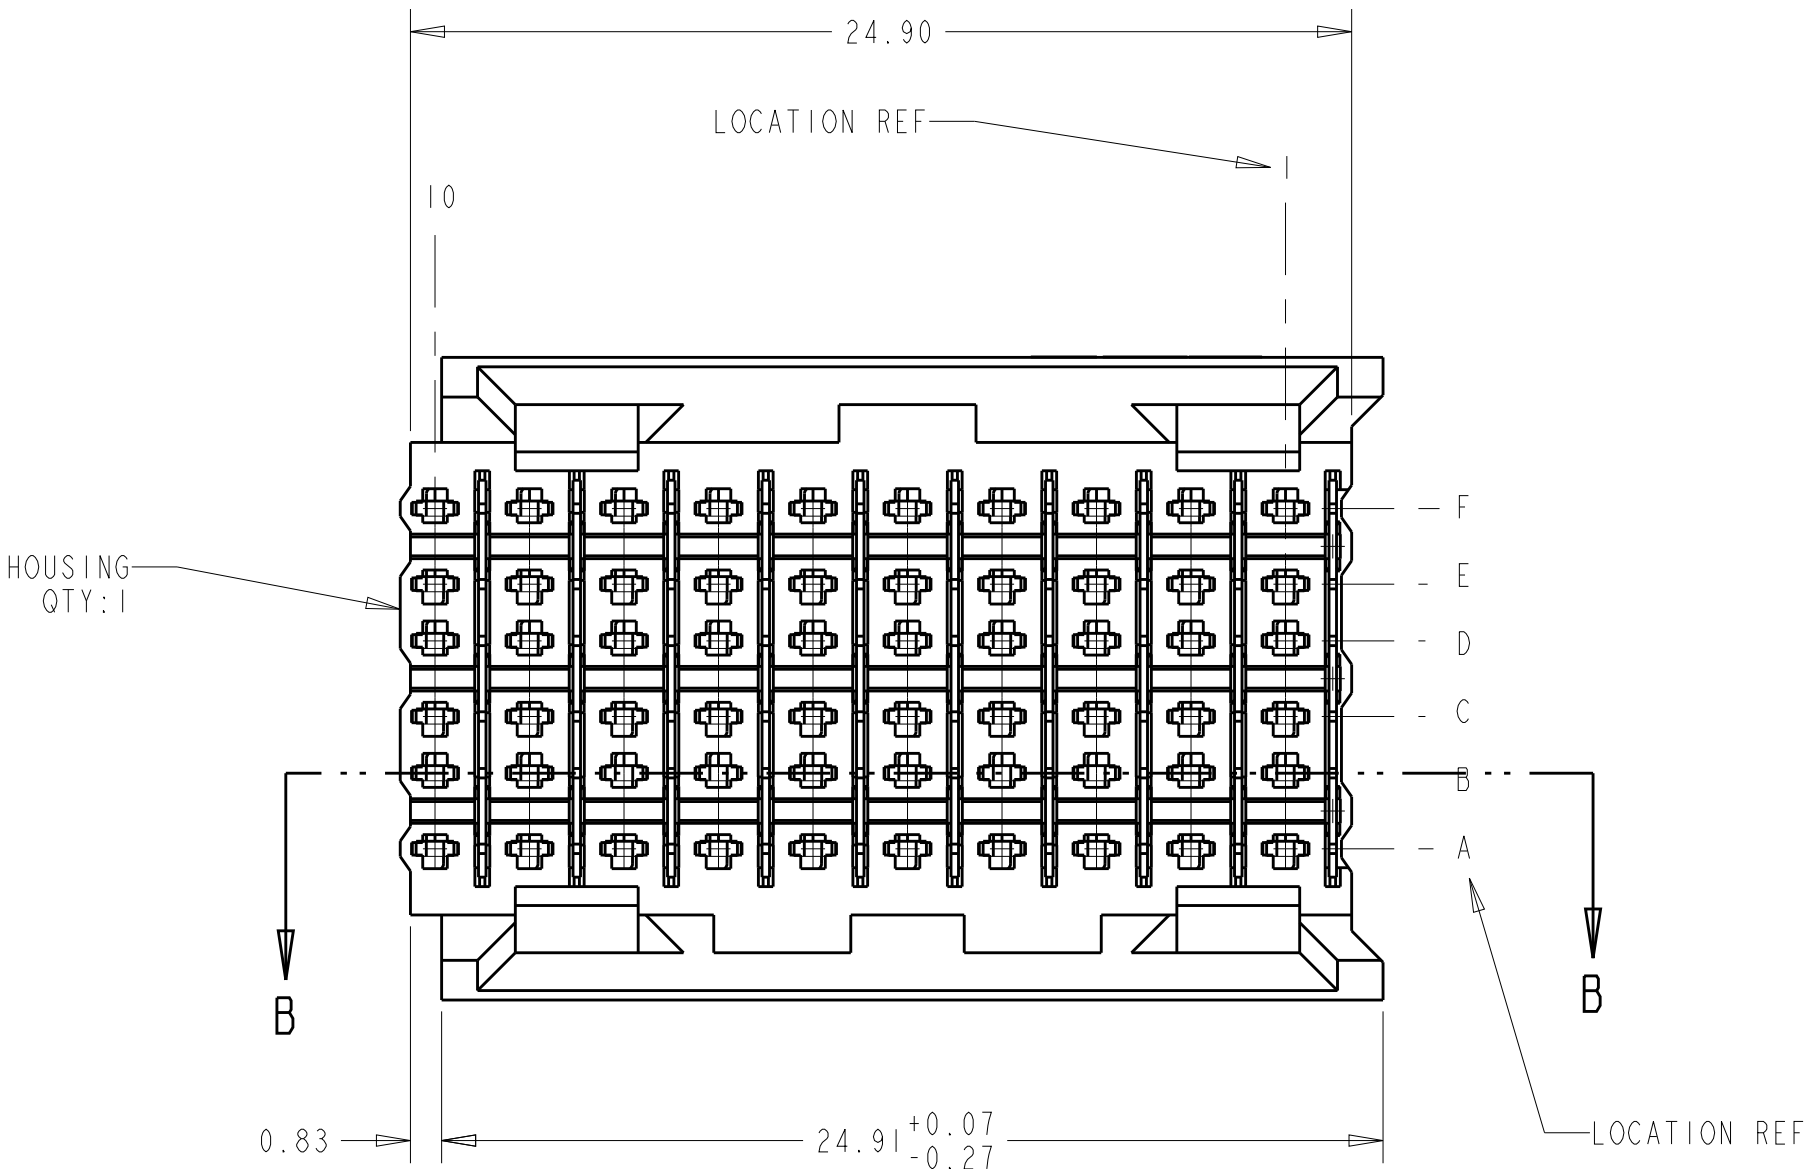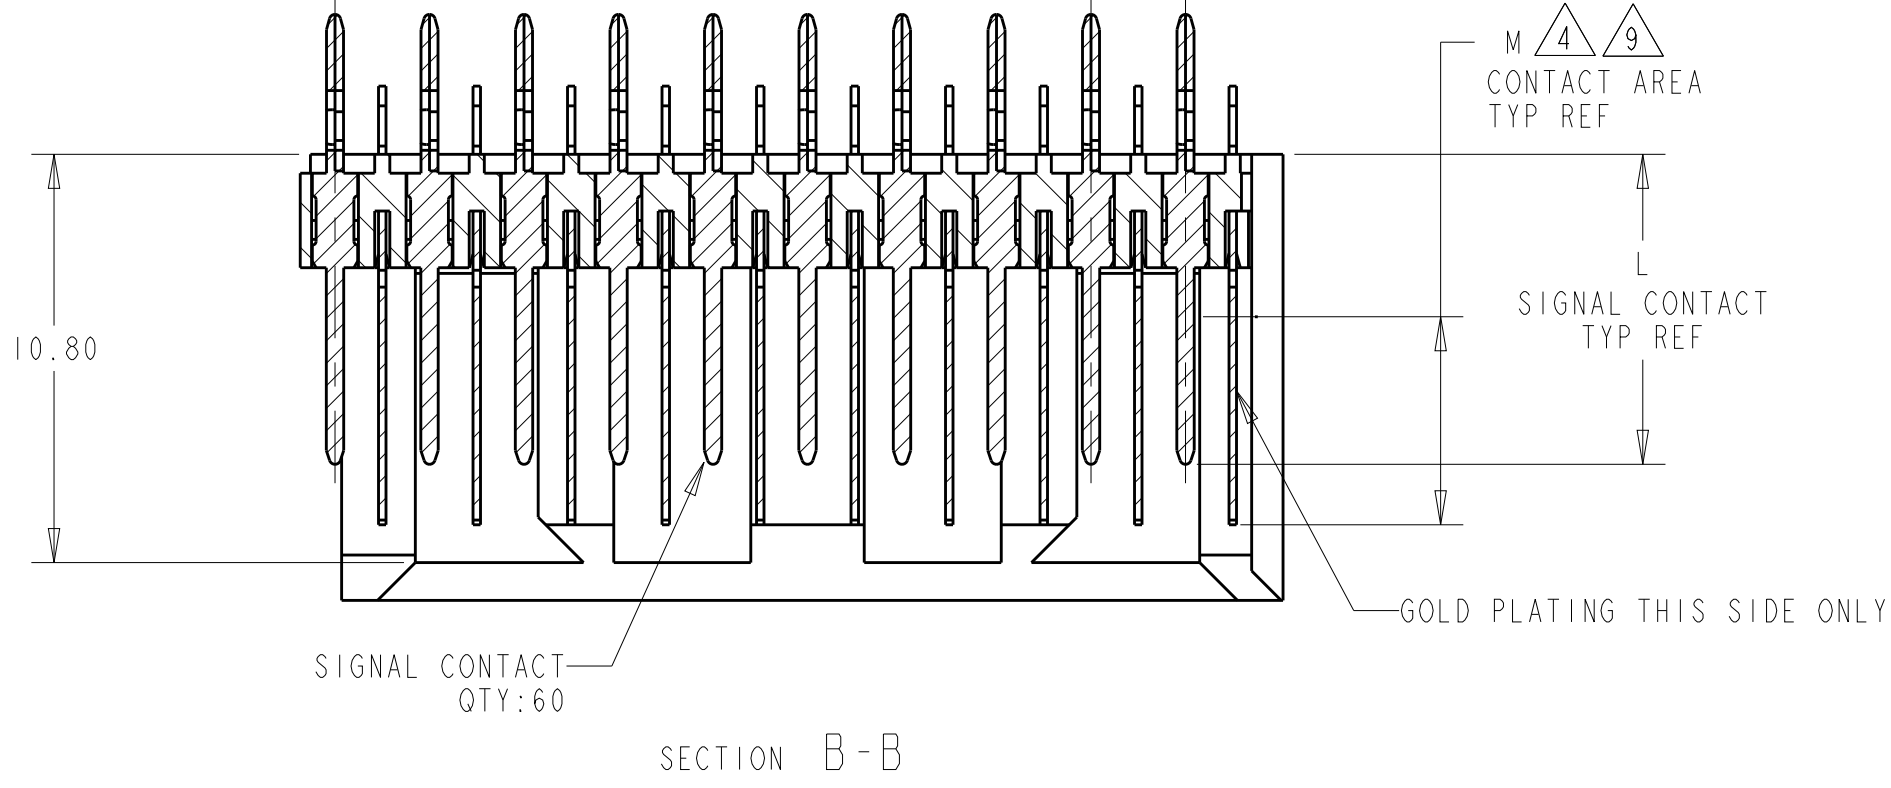

RECOMMENDED
PRINTED CIRCUIT BOARD
LAYOUT
COMPONENT SIDE OF PRINTED CIRCUIT BOARD

5.50	8.2	6645402-1
M	L	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. CARBO 12JUL2007	TE Connectivity	
DIMENSIONS:		CHK M. BOWERS 12JUL2007		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD M. BOWERS 12JUL2007	NAME	HEADER ASSEMBLY, 60 POSITION, 6 ROW, BACKPLANE CONNECTOR, Z-PACK HS3
	0 PLC ±	PRODUCT SPEC	SIZE	A1
	1 PLC ±	APPLICATION SPEC	CAGE CODE	00779
	2 PLC ±0.13	WEIGHT	DRAWING NO	6645402
	3 PLC ±0.05	CUSTOMER DRAWING	SCALE	5:1
MATERIAL HOUSING: 3	FINISH		SHEET	1
CONTACTS: 2	SIGNAL CONTACT: 4		OF	1
			REV	C