


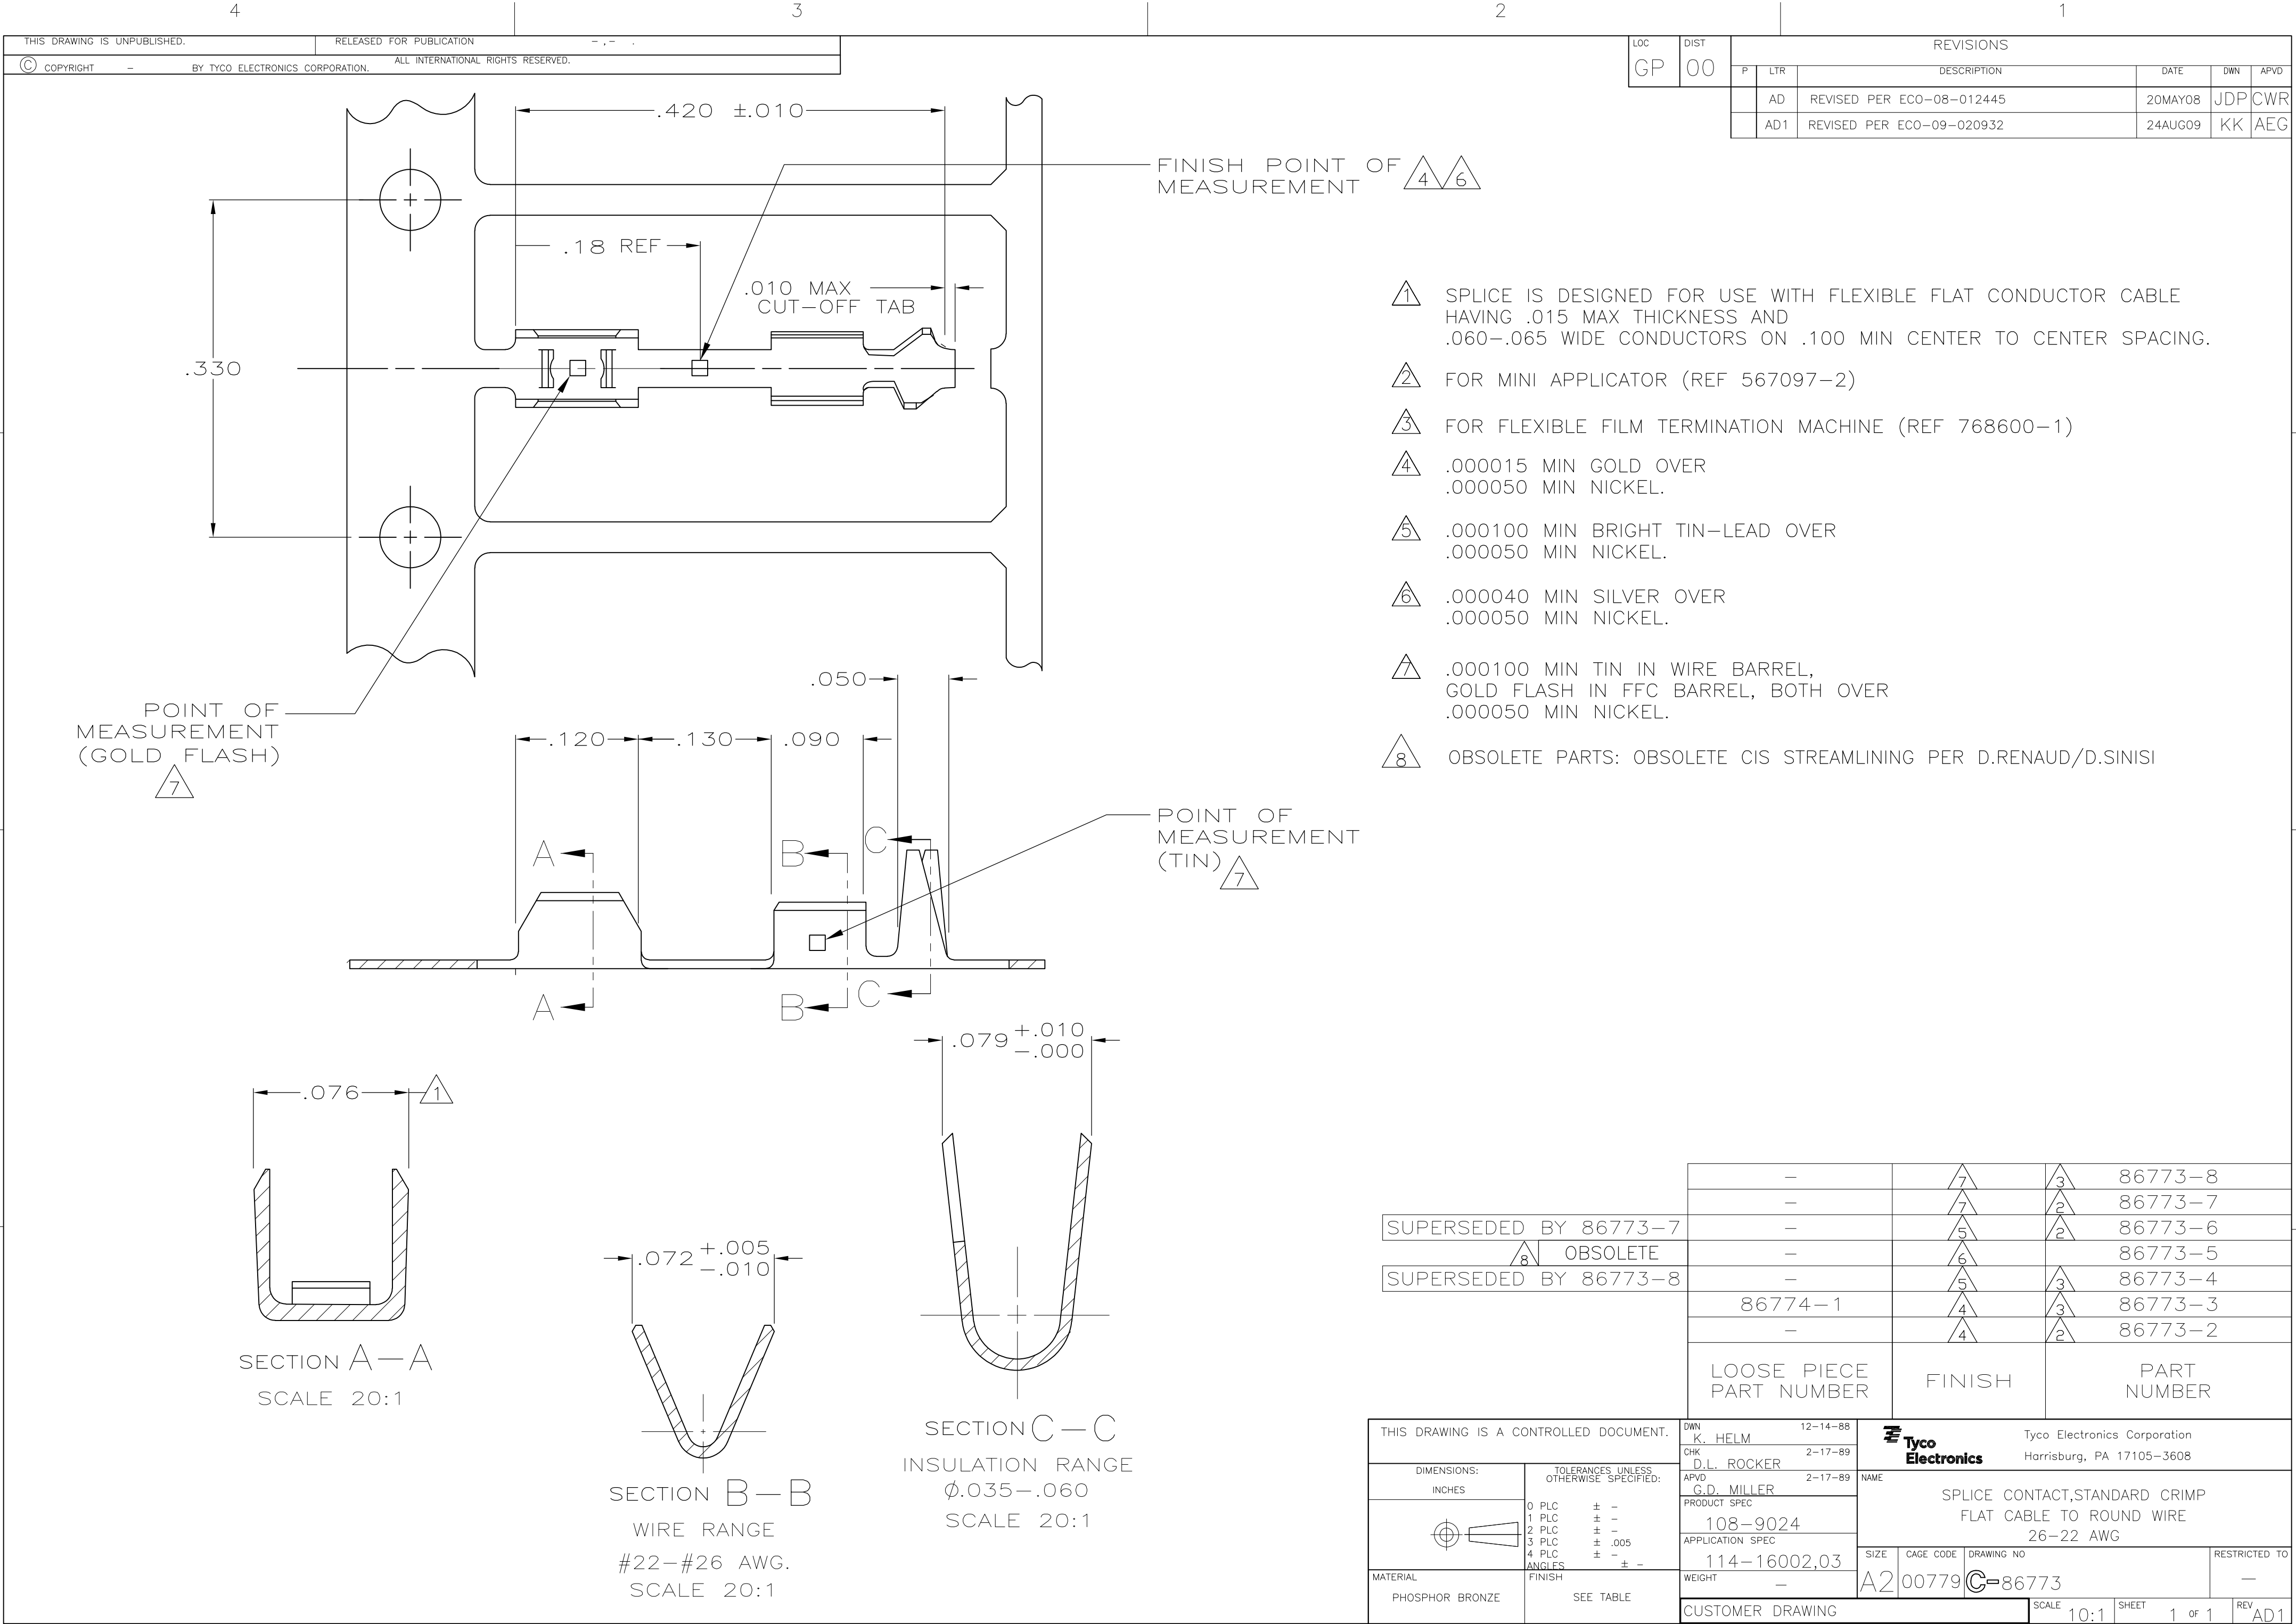

LOC		DIST		REVISIONS			
GP		00		P	LTR	DESCRIPTION	DATE
					DWN	APVD	
				AD		REVISED PER ECO-08-012445	20MAY08
				AD1		REVISED PER ECO-09-020932	24AUG09

- 1 SPLICE IS DESIGNED FOR USE WITH FLEXIBLE FLAT CONDUCTOR CABLE HAVING .015 MAX THICKNESS AND .060-.065 WIDE CONDUCTORS ON .100 MIN CENTER TO CENTER SPACING.
- 2 FOR MINI APPLICATOR (REF 567097-2)
- 3 FOR FLEXIBLE FILM TERMINATION MACHINE (REF 768600-1)
- 4 .000015 MIN GOLD OVER
.000050 MIN NICKEL.
- 5 .000100 MIN BRIGHT TIN-LEAD OVER
.000050 MIN NICKEL.
- 6 .000040 MIN SILVER OVER
.000050 MIN NICKEL.
- 7 .000100 MIN TIN IN WIRE BARREL,
GOLD FLASH IN FFC BARREL, BOTH OVER
.000050 MIN NICKEL.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

SUPERSEDED BY 86773-7 OBSOLETE SUPERSEDED BY 86773-8	-	7	3	86773-8
	-	7	2	86773-7
	-	5	2	86773-6
	-	6		86773-5
	-	5	3	86773-4
86774-1		4	3	86773-3
-		4	2	86773-2
LOOSE PIECE PART NUMBER		FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. HELM 12-14-88	Tyco Electronics Corporation Harrisburg, PA 17105-3608					
		CHK D.L. ROCKER 2-17-89						
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD G.D. MILLER 2-17-89	NAME SPLICE CONTACT, STANDARD CRIMP FLAT CABLE TO ROUND WIRE 26-22 AWG					
	0 PLC ± -	PRODUCT SPEC 108-9024						
	1 PLC ± - 2 PLC ± - 3 PLC ± .005 4 PLC ± - ANGLES ± -	APPLICATION SPEC 114-16002,03						
MATERIAL PHOSPHOR BRONZE	FINISH SEE TABLE	WEIGHT -	SIZE A2	CAGE CODE 00779	DRAWING NO C=86773	RESTRICTED TO -		
		CUSTOMER DRAWING	SCALE 10:1		SHEET 1 of 1	REV AD1		