
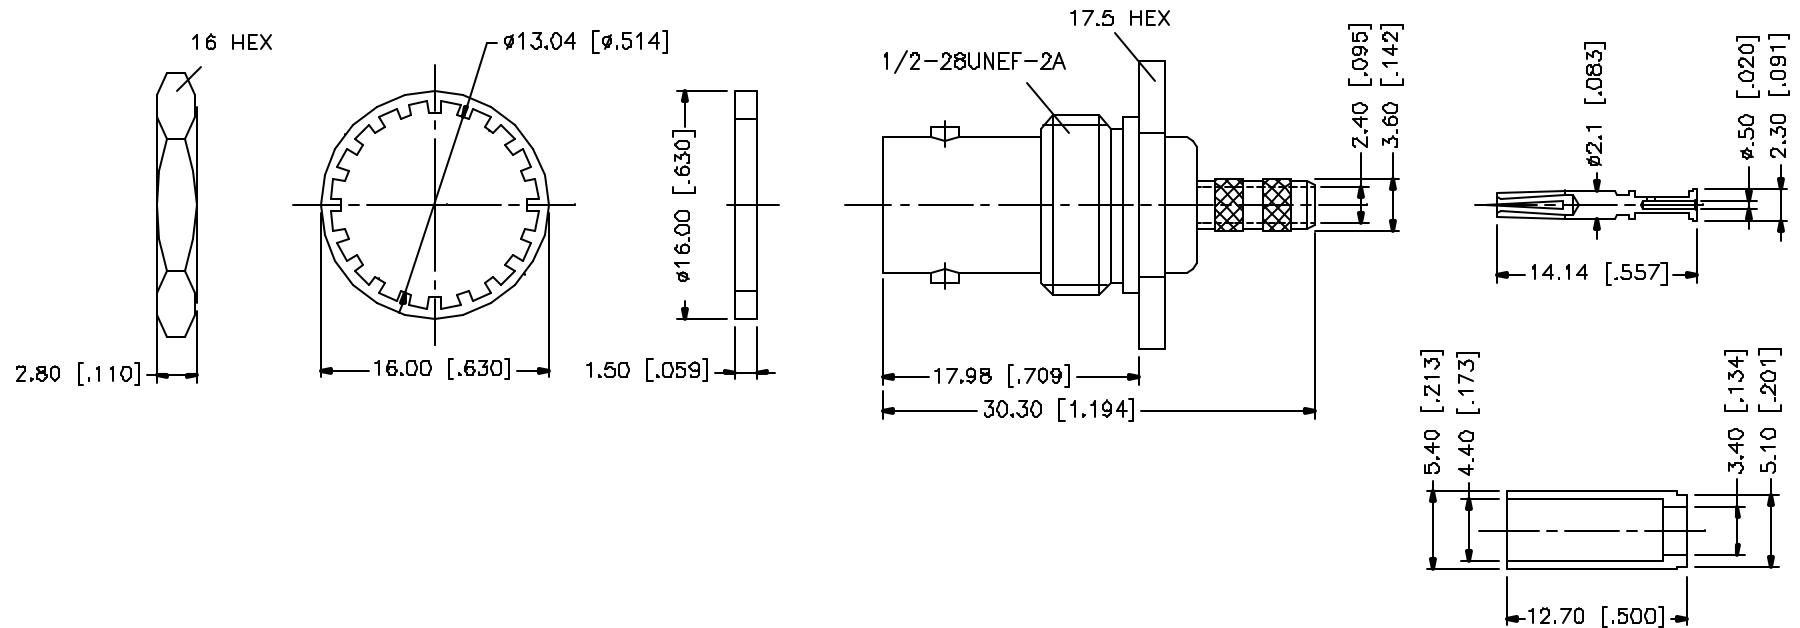


REV.	DATE	DESCRIPTION
A	03/18/05	UPDATE DRAWING FORMAT

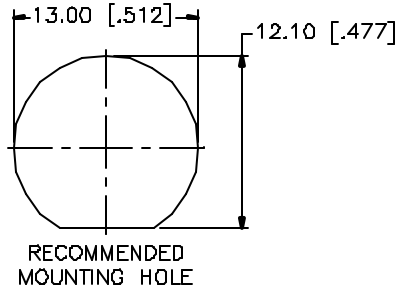

NOTES: FINISH {PLATING THICKNESS IN MICRO-INCHES}

1. NICKEL PL. 100 MIN. OVER COPPER PL. 50 MIN.
OVER COPPER PL. 50 MIN.
2. GOLD PL. 30 MIN. OVER NICKEL PL. 50 MIN.
3. TEFLON MIL-P-19468.

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
5						DRAWN	G.R.S.					
7	FERRULE	COPPER	NICKEL	1		CHECKED		PART DESCRIPTION				
6	HEX NUT	BRASS	NICKEL	1		ISSUED		BNC BULKHEAD CRIMP JACK (FOR AT&T 735A CABLE - 75ohm)				
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1	PART NO. 112969				
4	GASKET	SILICONE	RED	1		CAD FILE C:/112/112969.DWG		DWS. NO. 112969.DWG		REV. A	SIZE A	SCALE NA
3	CONTACT PIN	PHOS. BRONZE	GOLD	1								
2	INSULATOR	TEFLON	NATURAL	1								
1	BODY	BRASS	NICKEL	1								
	DESCRIPTION	MATERIAL	FINISH	QTY								