


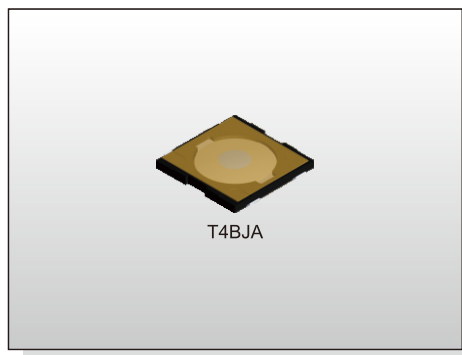

FEATURES

- ※ Compact-sized 4.8x4.8mm
- ※ Low profile of 0.55mm height
- ※ Long operating life

APPLICATION

- ※ Smart phone
- ※ Digital camera, Medical
- ※ Portable electronic device

SPECIFICATION

Contact Rating	50mA, 12V DC
Contact Resistance	100mΩ max.
Insulation Resistance	100MΩ min. 100V DC
Dielectric Strength	100V AC/1 minute
Operating Force	100±50gf/160±50gf/200±50gf 260±50gf/360±60gf
Travel	0.2mm
Operating Life	200,000 cycles for 360gf 500,000 cycles for 260/200gf 1,000,000 cycles for 160/100gf
Operating Temp.	-30°C ~ +80°C
Storage Temp.	-40°C ~ +85°C

HOW TO ORDER

T 4 B J ☐ ☐ ☐ **B Q R**

Terminal Pitch:
A=2.80mm
B=3.70mm

Operating Force:


10=100gf
16=160gf
20=200gf
26=260gf
36=360gf

Package:
Tape & Reel

Halogen Free

Double Dome



CIRCUIT

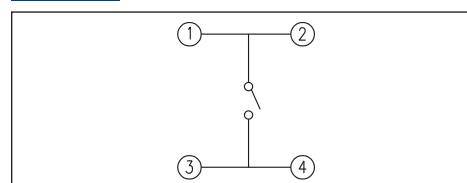

PACKAGE




<Tape & Reel>
8000 pcs

T4BJA

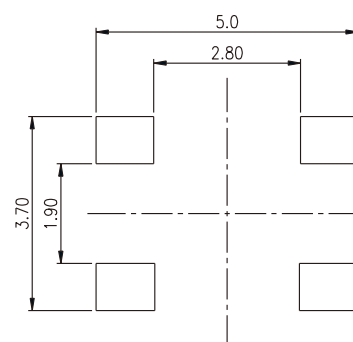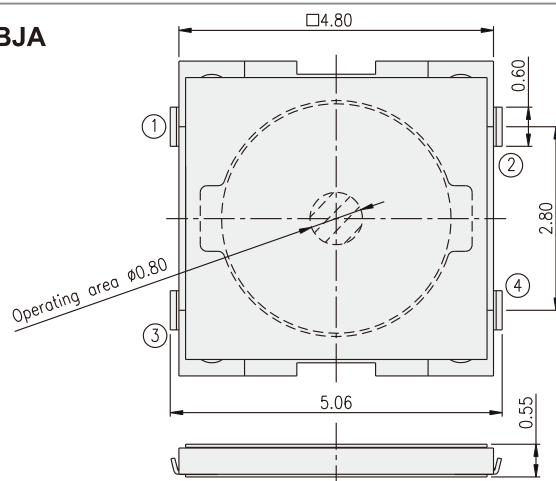

P.C.B. LAYOUT

T4BJB

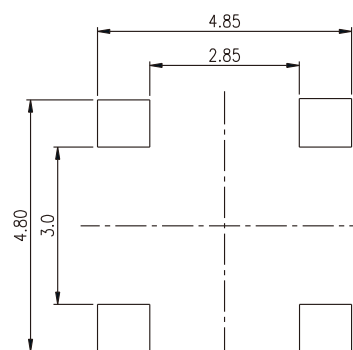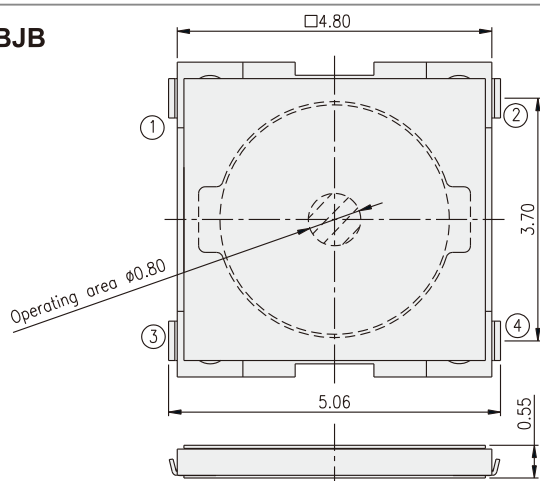

P.C.B. LAYOUT