
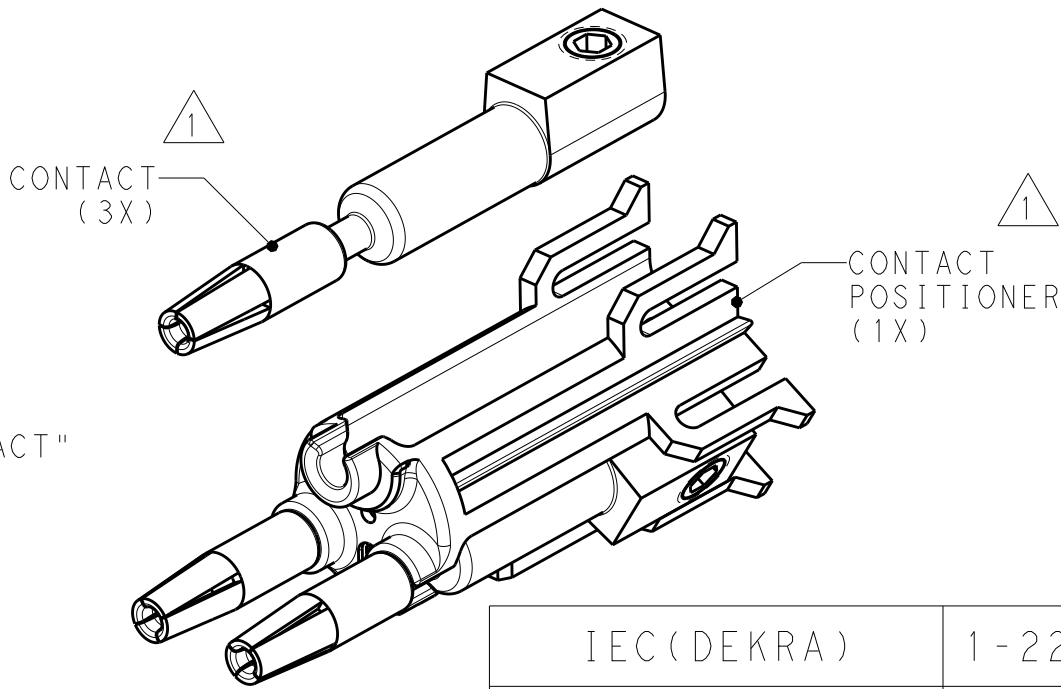
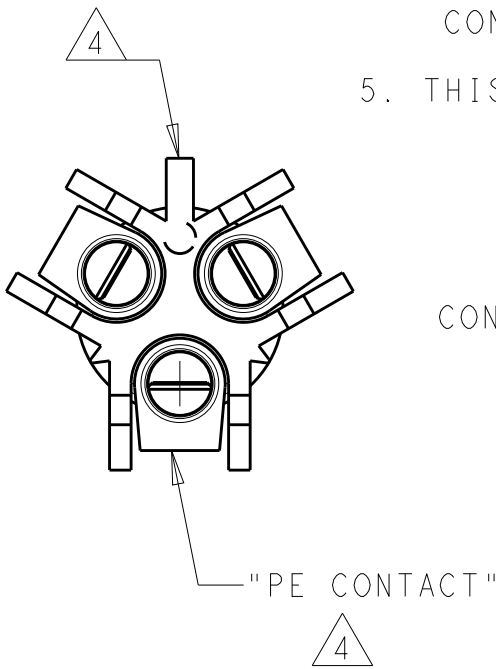


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED AS PER ECR-15-005925	21APR2015	RS	JL
	A1	REVISED AS PER ECR-15-009215	19JUN2015	RS	JL

NOTES:

- 1 MATERIALS:
CONTACTS: COPPER ALLOY, TIN PLATE
CONTACT POSITIONER: GLASS FILLED PBT,
COLOR BLACK.
2. MUST COMPLY WITH DIRECTIVE 2002/95/EC (ROHS)
3. CONTACTS (3X) ARE PRE-ASSEMBLED INTO CONTACT
POSITIONER AS SHOWN.
- 4 ASSEMBLY "KEY" ALIGNS WITH "PE"
CONTACT AS SHOWN.
5. THIS PRODUCT HAS NOT COMPLETED VALIDATION TESTING

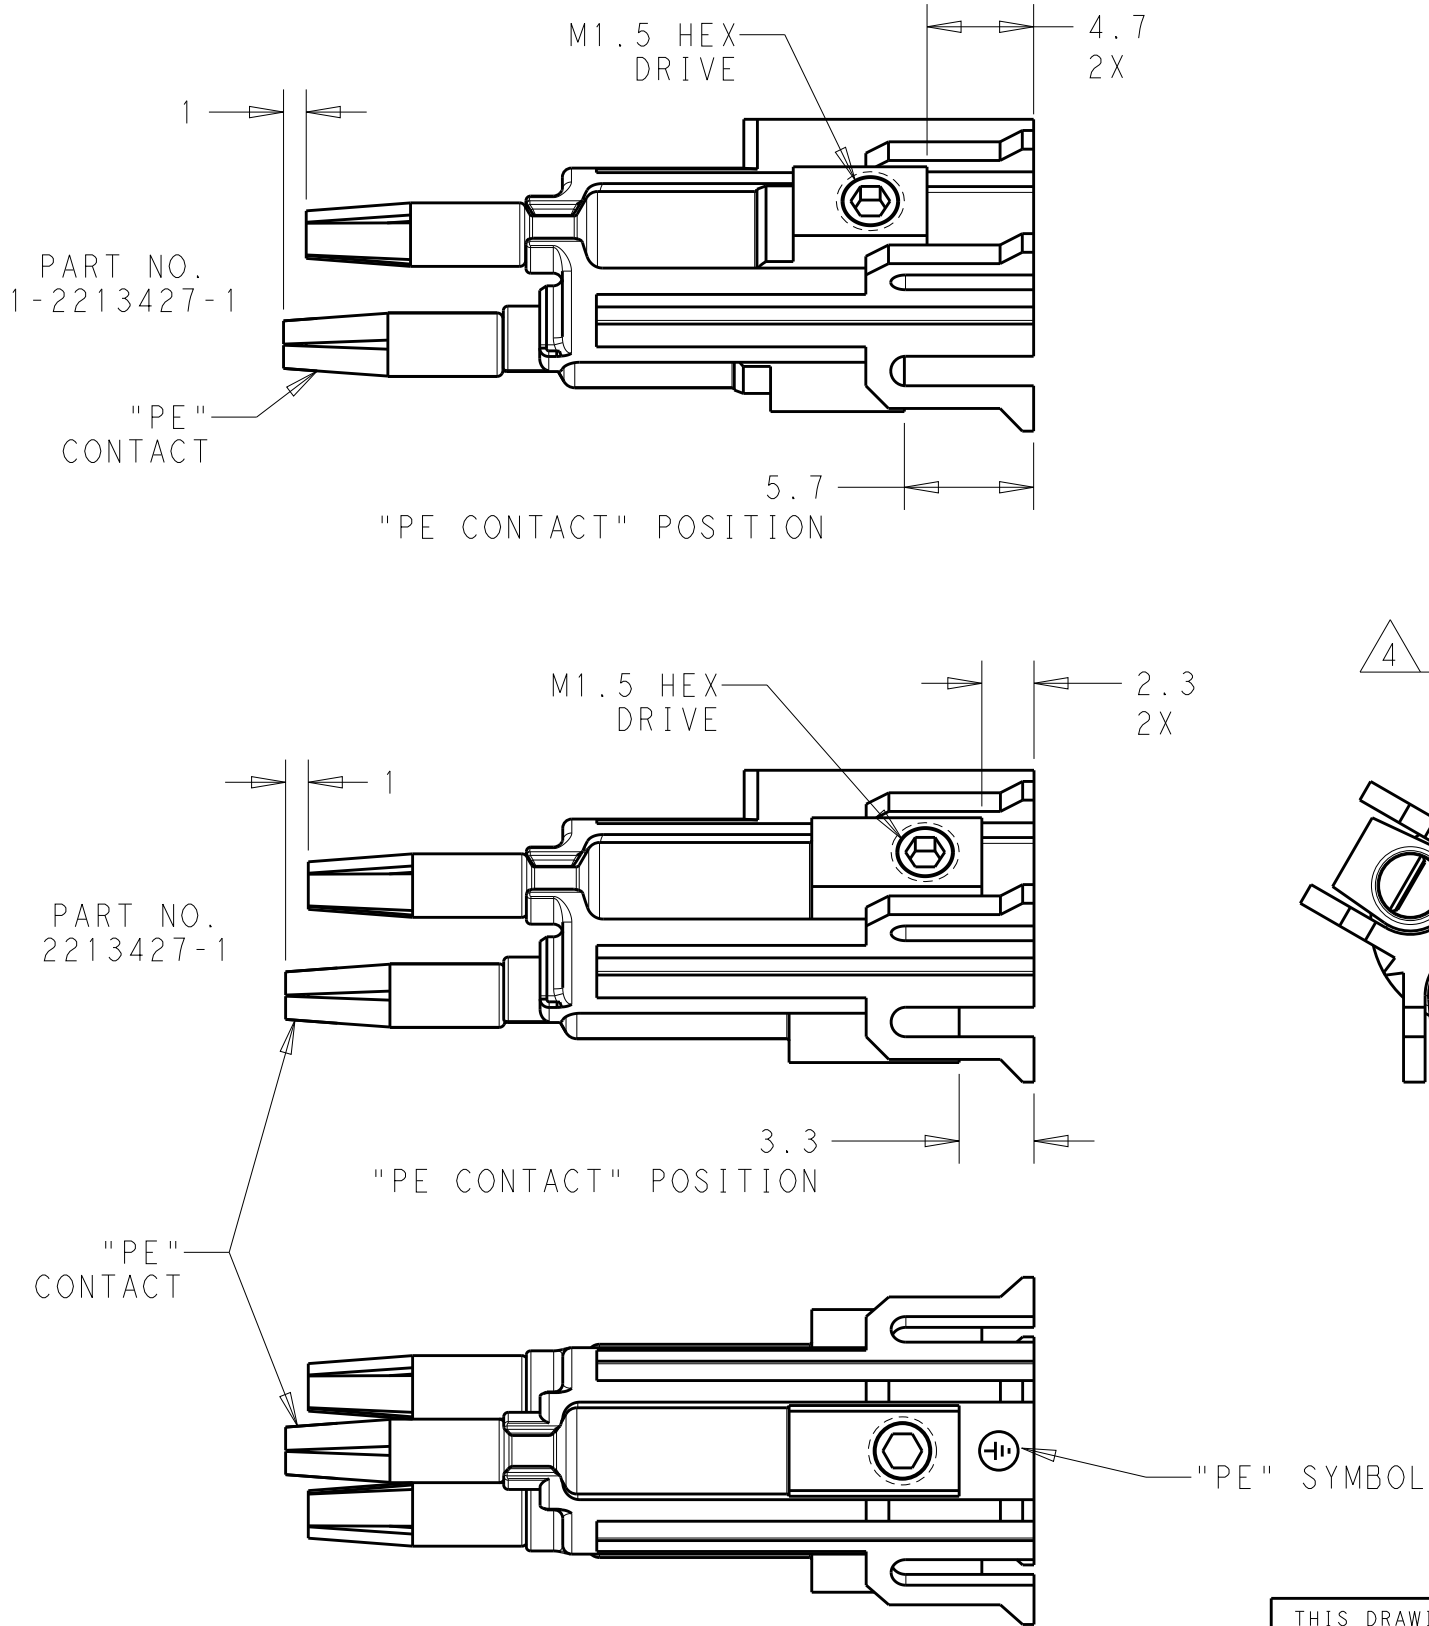

IEC (DEKRA)	1-2213427-1
UL	2213427-1
AGENCY APPROVALS	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 31MAR2014	 TE Connectivity	
		CHK M. LUKSIC 31MAR2014		
		APVD M. LUKSIC 31MAR2014	NAME	
		PRODUCT SPEC	ASSY, FI SOCKET, NECTOR M-LINE	
		APPLICATION SPEC	SEALED, 3 POSN	
		WEIGHT	-	
		Customer Drawing	-	
		SCALE	1:1	
		SHEET	1 OF 1	
		REV	A1	

DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
mm			
		0 PLC	±
		1 PLC	±0.2
		2 PLC	±0.13
		3 PLC	±
		4 PLC	±
		ANGLES	±
MATERIAL		FINISH	
-		-	
-		-	