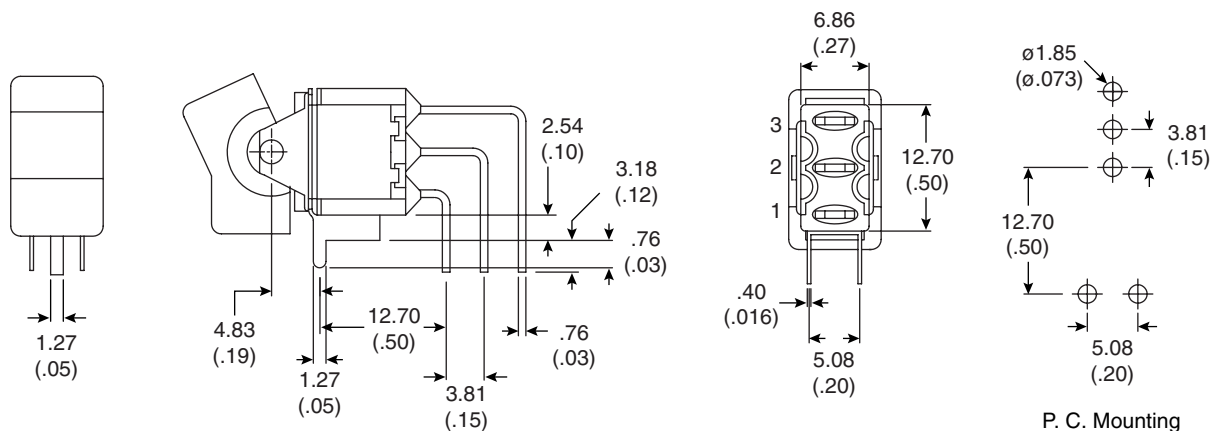


**DIMENSIONS: mm (in.)**

P. C. Mounting

| Pos. 1 | Pos. 2 | Pos. 3 |
|--------|--------|--------|
|        |        |        |
| On     | None   | On     |
| 2-3    | Open   | 2-1    |
|        |        |        |

Switch Function

**Mechanical Specifications:**

- Mechanical Life: 50,000 make-and-break cycles at full load
- Operating Temperature: -30°C to 85°C

**Electrical Specifications:**

- Rating: 2A/250VAC, 5A/120VAC or 28 VDC
- Contact Resistance: 10mΩ max. initial @ 2-4 VDC 100mA
- Insulation Resistance: 1000MΩ min.
- Dielectric Strength: 1000 V RMS @ sea level

**Materials:**

- Case: Diallyl phthalate (DAP)
- Actuator: Nylon, black std.
- Bushing: Brass, nickel plated
- Housing: Stainless steel
- Switch Support: Brass, tin plated
- Terminals/Contact: Brass, Silver or Gold plated

**Note:**

- RoHS Compliant by Exemption

**Miniature Rocker Switch**  
103-7006-EVX

**Mountain**  
**Switch**