

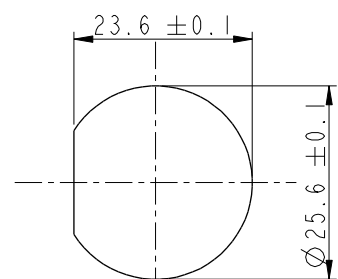
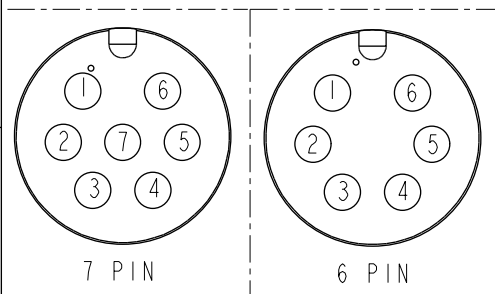



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190347	2019/03/06	Vicky	Change Note

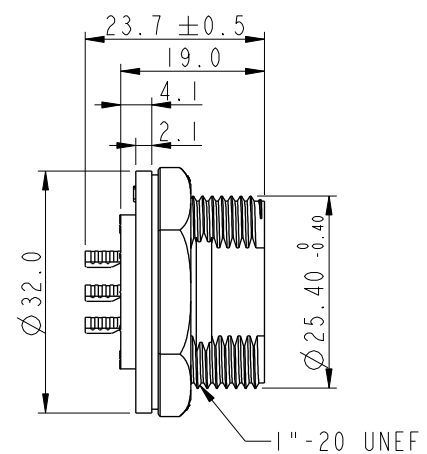

Recommended Panel
Cut-Out





Pin Assignments Front View

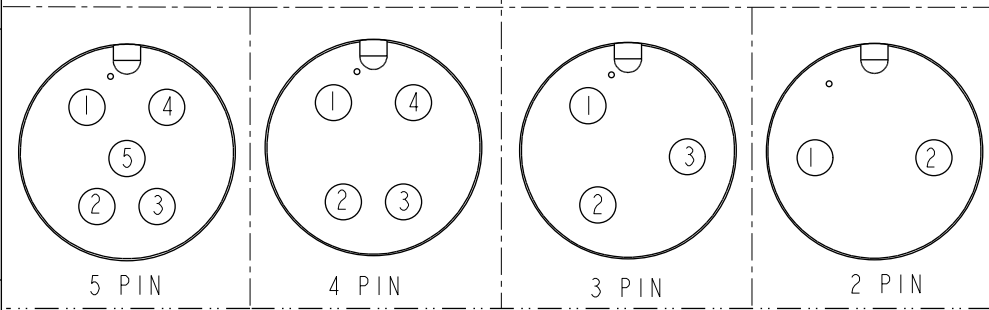

Pin Assignments Front View

ADC-XXPMMS-SC7001
02:2Pin
07:7Pin

With Liquid Glue

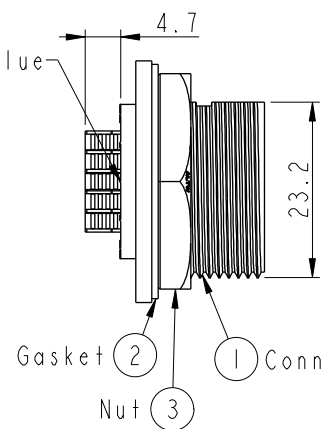

- Note:
- * (CC) Important Dimension To Check.
 - * Waterproof Rate: IP67, Unmated.
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Gasket: Rubber, Gray.
 - * Nut: Thermoplastic, Black.
 - * Use with waterproof cap or dust cap
Maximum Panel Thickness:1.8mm
 - * Use without waterproof cap or dust cap
Maximum Panel Thickness:3.0mm
 - * Gasket and Nut are packed separately
in PE bags. (Gasket/Nut不組裝，散裝出貨)

UNIT:mm		TITLE	
TOLERANCE		LARGE	
.X		PANEL SCREW M CONN M PIN	
.XX		SCALE	SIZE
.XXX		1:1	A4
ANGLES		REV.	WC-REV.
±0.25		B	A.3
±0.1		SHEET 1 OF 1	
±0.05		QC: Inspection item	
±1°			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Vicky	2019-03-06
ADC-XXPMMS-SC7001	CHECKED BY	DATE
	Rita	2019-03-06
CUSTOMER	APPROVED BY	DATE
ALTW	Max	2019-03-06