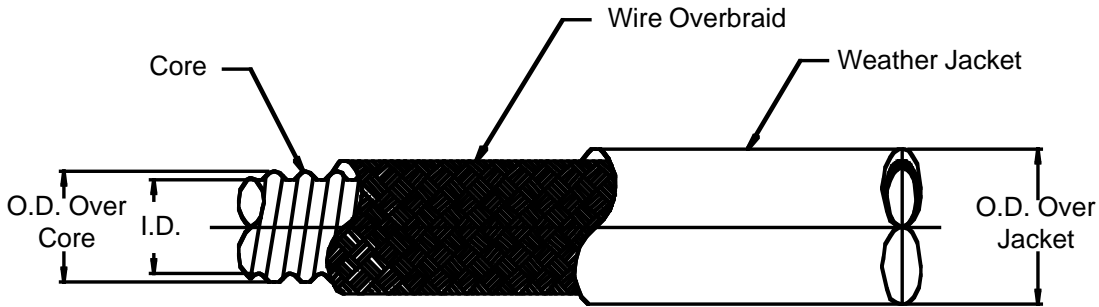


Standard Brass,  
Compressed  
Brass and FEP

### M24758/1-16-F

Basic Part No.

Core Designator: (See Note 1)  
Omit for uncompressed brass  
F = FEP  
C = Compressed Brass  
  
Conduit Size Code



**TABLE I**

Conduit Size Code	Nominal		I.D.		O.D. (Over Core)		O.D. (Over Jacket)		Min Bend Radius (Inside)
	I.D.		Min		±0.01 (.3)		±.040 (1.0)		
02	.250	(6.4)	.245	(6.2)	.364	(9.2)	.580	(14.7)	1.250 (31.8)
03	.375	(9.5)	.370	(9.4)	.488	(12.4)	.700	(17.8)	2.000 (50.8)
04	.500	(12.7)	.495	(12.6)	.637	(16.2)	.850	(21.6)	2.500 (63.5)
05	.625	(15.9)	.620	(15.7)	.760	(19.3)	.980	(24.9)	3.000 (76.2)
06	.750	(19.1)	.745	(18.9)	.880	(22.4)	1.100	(27.9)	3.750 (95.3)
08	1.000	(25.4)	.995	(25.3)	1.192	(30.3)	1.410	(35.8)	5.000 (127.0)
10	1.250	(31.8)	1.245	(31.6)	1.454	(36.9)	1.660	(42.2)	6.250 (158.8)
12	1.500	(38.1)	1.495	(38.0)	1.704	(43.3)	1.910	(48.5)	7.500 (190.5)
16	2.000	(50.8)	1.995	(50.7)	2.214	(56.2)	2.440	(62.0)	10.000 (254.0)
20	2.500	(63.5)	2.495	(63.4)	2.714	(68.9)	2.940	(74.7)	12.500 (317.5)
24	3.000	(76.2)	2.995	(76.1)	3.204	(81.4)	3.440	(87.4)	15.000 (381.0)

**NOTES:**

1. The standard conduit core material is crush-resistant, high performance brass. No core designator is used when ordering the standard brass core. FEP core material can be specified by adding "F" to the end of the standard part number configuration. Compressed brass core can be specified by adding "C" to the end of the standard part number configuration.
2. FEP core is supplied with two tin/copper braids, and a neoprene jacket
3. Metric dimensions (mm) are indicated in parentheses.
4. For complete dimensions see applicable Military Specification.