


THIS DOCUMENT CONTAINS PROPRIETARY DATA OF POLARIS INDUSTRIAL ENTERPRISES, INC. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THERE OF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.

REV.	BY	DATE	APPRVL.	P/N
E	DM	7/25/96	BT	SW22E

ADDED 20K SPECS TO VALUES CHART

**SPECIFICATIONS**

RESISTANCE RANGE ----- 50 OHMS TO 20K OHMS  
 RESISTANCE TOLERANCE ----- ±3%  
 INDEPENDENT, LINEARITY ----- ±0.5%  
 POWER RATING ----- 0.5 WATTS  
 ELECTRICAL NOISE ----- 100 OHM MAX.  
 ELECTRICAL ANGLE ----- 320±5°  
 MECHANICAL ANGLE ----- 320±5°  
 STOP STRENGTH ----- 84 OZ.IN.MIN.  
 END RESISTANCE ----- 2% OR 1 OHM MAXIMUM  
 RESOLUTION ----- SEE CHART  
 INSULATION RESISTANCE ----- 1000 MEGOHMS AT 1000 VDC MIN.  
 DIELECTRIC STRENGTH ----- 1000 VAC  
 STARTING TORQUE ----- 0.8 OZ.IN.MAX.  
 TEMPERATURE COEFFICIENT ----- SEE CHART  
 WEIGHT ----- APPROX. 0.7 OZ.  
 OPERATING TEMPERATURE ----- -55°C TO +105°C  
 ROTATIONAL LIFE ----- 500,000 SHAFT REVOLUTIONS

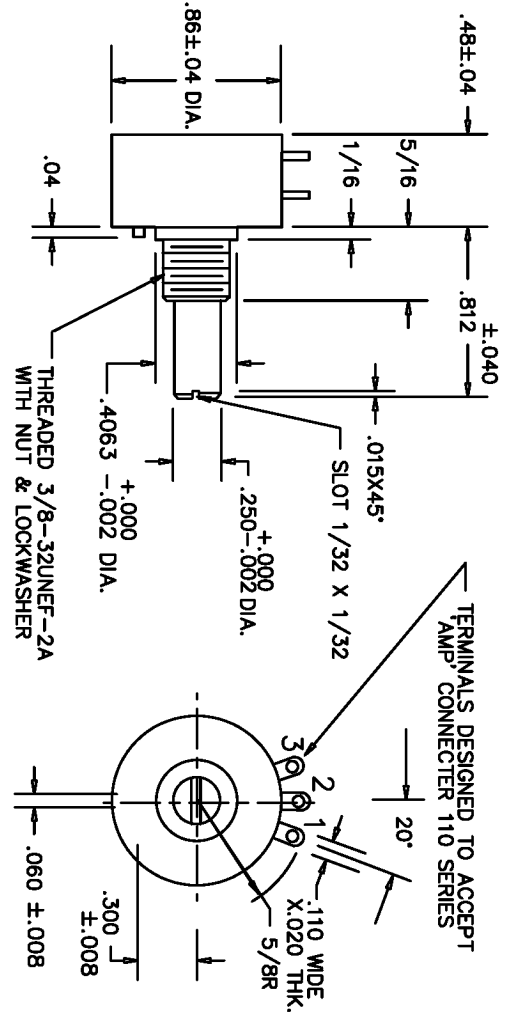

**MATERIALS**

HOUSING----- HIGH TEMP. THERMO PLASTIC  
 TERMINALS----- GOLD PLATED BRASS  
 BUSHING----- BRASS  
 SHAFT----- STAINLESS STEEL  
 RESISTIVE ELEMENT----- WIREWOUND

**NON-STANDARDS AVAILABLE**

MULTI-RANGED UP TO 6 SECTIONS  
 REAR SHAFT EXTENSION  
 FRONT SHAFT MODIFICATIONS  
 CENTER TAP  
 SPECIAL ELECTRICAL AND MECHANICAL ANGLES

**STANDARD RESISTANCE VALUES CHART**


RESISTANCE (OHMS)	50	100	200	500	1K	2K	5K	10K	20K
RESOLUTION	.33	.27	.21	.22	.17	.13	.10	.08	.06
TEMPERATURE COEFFICIENT PPM/°C	80	80	80	20	20	20	20	20	20

**TOLERANCES**

XX = +/- .010" FRACT. = +/- 1/64"  
 XXX = +/- .005" ANGLES = +/- 1/2"

ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.

SCALE	DATE: 8/4/86
NONE	BY BT
APPRV/D	BT
CODE IDENT: 19477	

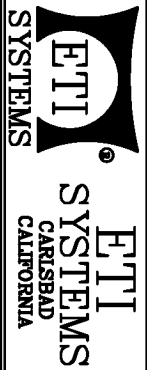

TITLE  
 SINGLE TURN  
 POTENTIOMETER

PART NO.  
 SW22E

