


THIS DOCUMENT CONTAINS PROPRIETARY DATA OF POLARIS INDUSTRIAL ENTERPRISES, INC. NO DISCLOSURE, REPRODUCTION, OR USE OF ANY PART THERE OF MAY BE MADE EXCEPT BY WRITTEN PERMISSION.

REV.	BY	DATE	APPRVL.	P/N
E	DM	7/25/96	BT	SW22E

ADDED 20K SPECS TO VALUES CHART

SPECIFICATIONS

RESISTANCE RANGE ----- 50 OHMS TO 20K OHMS
 RESISTANCE TOLERANCE ----- ±3%
 INDEPENDENT, LINEARITY ----- ±0.5%
 POWER RATING ----- 0.5 WATTS
 ELECTRICAL NOISE ----- 100 OHM MAX.
 ELECTRICAL ANGLE ----- 320±5°
 MECHANICAL ANGLE ----- 320±5°
 STOP STRENGTH ----- 84 OZ.IN.MIN.
 END RESISTANCE ----- 2% OR 1 OHM MAXIMUM
 RESOLUTION ----- SEE CHART
 INSULATION RESISTANCE ----- 1000 MEGOHMS AT 1000 VDC MIN.
 DIELECTRIC STRENGTH ----- 1000 VAC
 STARTING TORQUE ----- 0.8 OZ.IN.MAX.
 TEMPERATURE COEFFICIENT ----- SEE CHART
 WEIGHT ----- APPROX. 0.7 OZ.
 OPERATING TEMPERATURE ----- -55°C TO +105°C
 ROTATIONAL LIFE ----- 500,000 SHAFT REVOLUTIONS

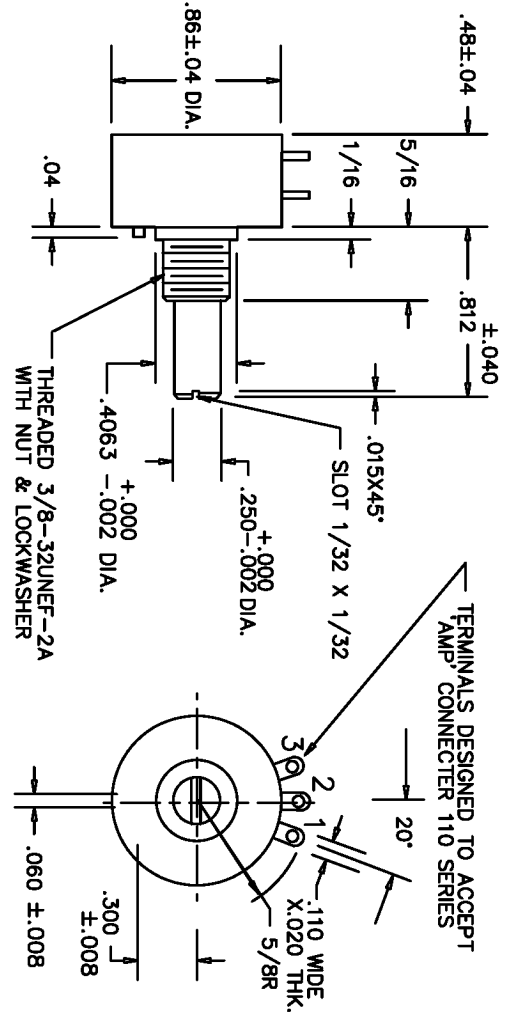

MATERIALS

HOUSING----- HIGH TEMP. THERMO PLASTIC
 TERMINALS----- GOLD PLATED BRASS
 BUSHING----- BRASS
 SHAFT----- STAINLESS STEEL
 RESISTIVE ELEMENT----- WIREWOUND


NON-STANDARDS AVAILABLE

MULTI-RANGED UP TO 6 SECTIONS
 REAR SHAFT EXTENSION
 FRONT SHAFT MODIFICATIONS
 CENTER TAP
 SPECIAL ELECTRICAL AND MECHANICAL ANGLES

STANDARD RESISTANCE VALUES CHART

RESISTANCE (OHMS)	50	100	200	500	1K	2K	5K	10K	20K
RESOLUTION	.33	.27	.21	.22	.17	.13	.10	.08	.06
TEMPERATURE									
COEFFICIENT PPM/°C	80	80	80	20	20	20	20	20	20

TOLERANCES		SCALE		DATE: 8/4/86	
XX = +/- .010"	FRACT. = +/- 1/64"	NONE	BY	BT	
XXX = +/- .005"	ANGLES = +/- 1/2°	APPRV'D	BT	BT	
ALL SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE					
CODE	IDENT:	19477			

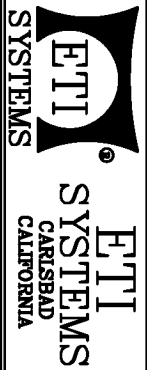

TITLE
 SINGLE TURN
 POTENTIOMETER

PART NO.
 SW22E

