


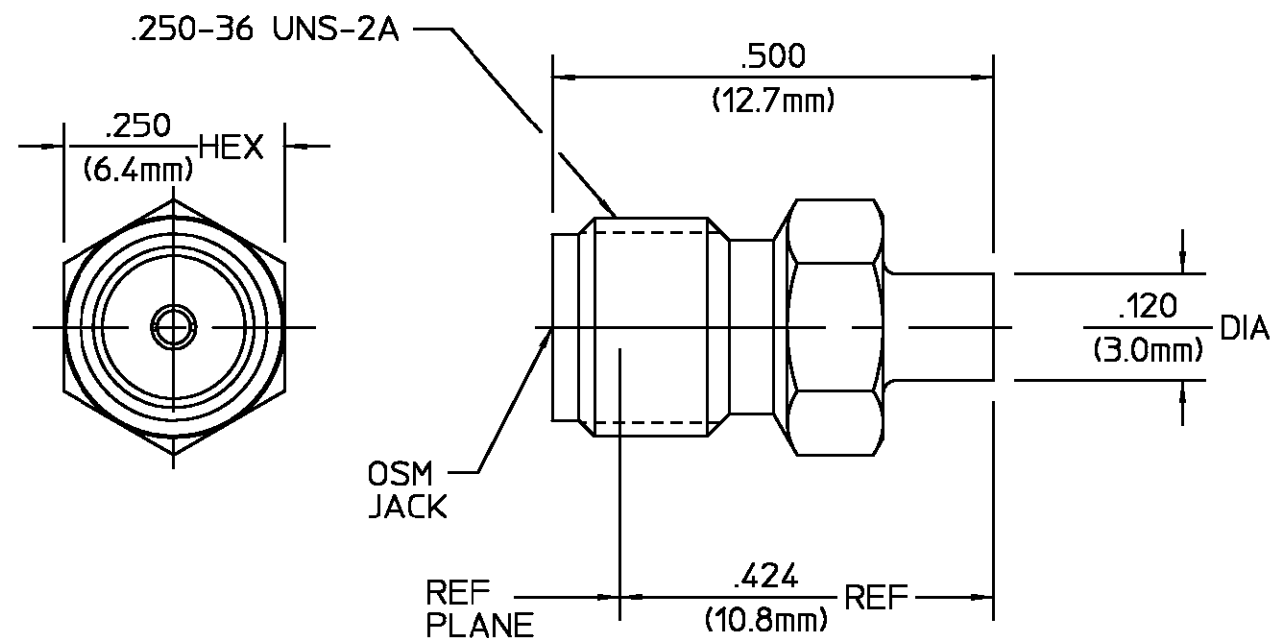

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
010	RELEASED	3/22/95	M.M.

DESIGN CONTROL REQUIRED

HOUSING	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303		GOLD PLATE PER MIL-G-45204	
	DIELECTRIC		TFE FLUOROCARBON PER ASTM-D-1457	
	CENTER CONTACT		BERYLLIUM COPPER PER ASTM-B-196 OR ASTM-B-197, ALLOY C17300, CONDITION H	
COMPONENT		MATERIAL		FINISH
CABLE ENTRY DIAMETER MINIMUM		DRAWN BY <i>M.M.</i> DATE 3/22/95		
HOUSING		CHECKED BY		
CONTACT		APPD BY		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCE ON		AMP Incorporated		
FRAC. DEC. ANGLES		140 Fourth Avenue		
± 1/64 ± .005 ± 1°		Waltham, MA 02451-7599		
These drawings and specifications are the property of M/A-COM Interconnect Division and shall not be reproduced or copied or used in whole or in part as the basis for the manufacture or sale of item(s) without written permission.		TITLE		
USE ASS'Y PROCEDURE		OSM STRAIGHT CABLE JACK DIRECT SOLDER ATTACHMENT		
408-04833 (20-010)		SIZE B	CODE IDENT NO. 26805	REV 010
NO. A.P.		SCALE 5:1	1250-1989-00	SHEET 1 OF 1

- NOTES:
- DESIGNED FOR USE WITH .085 DIA SEMI-RIGID CABLE
 - CAPTURED CENTER CONTACT