

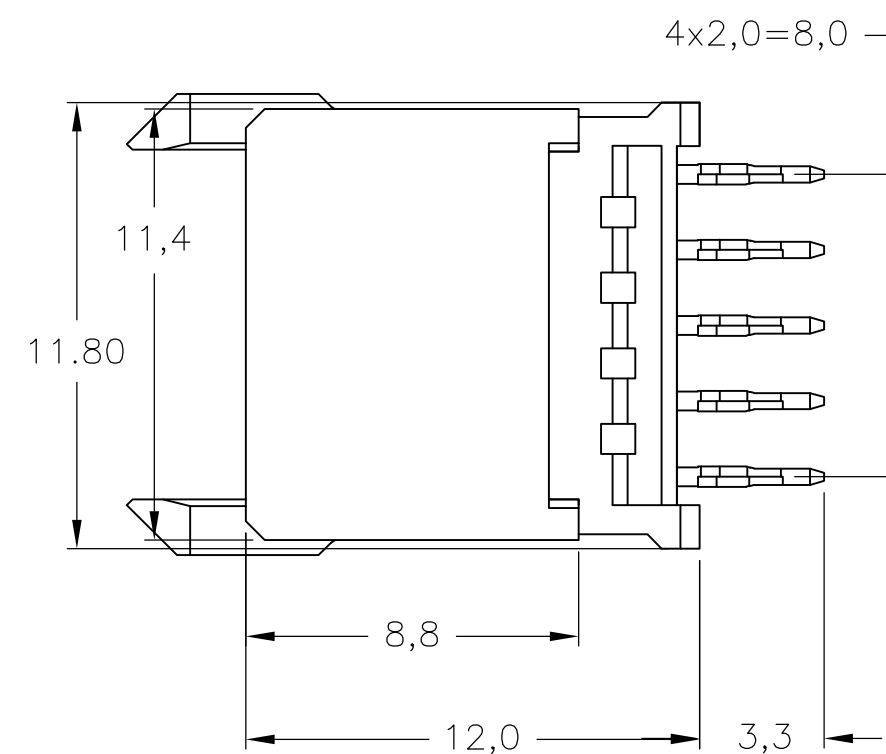
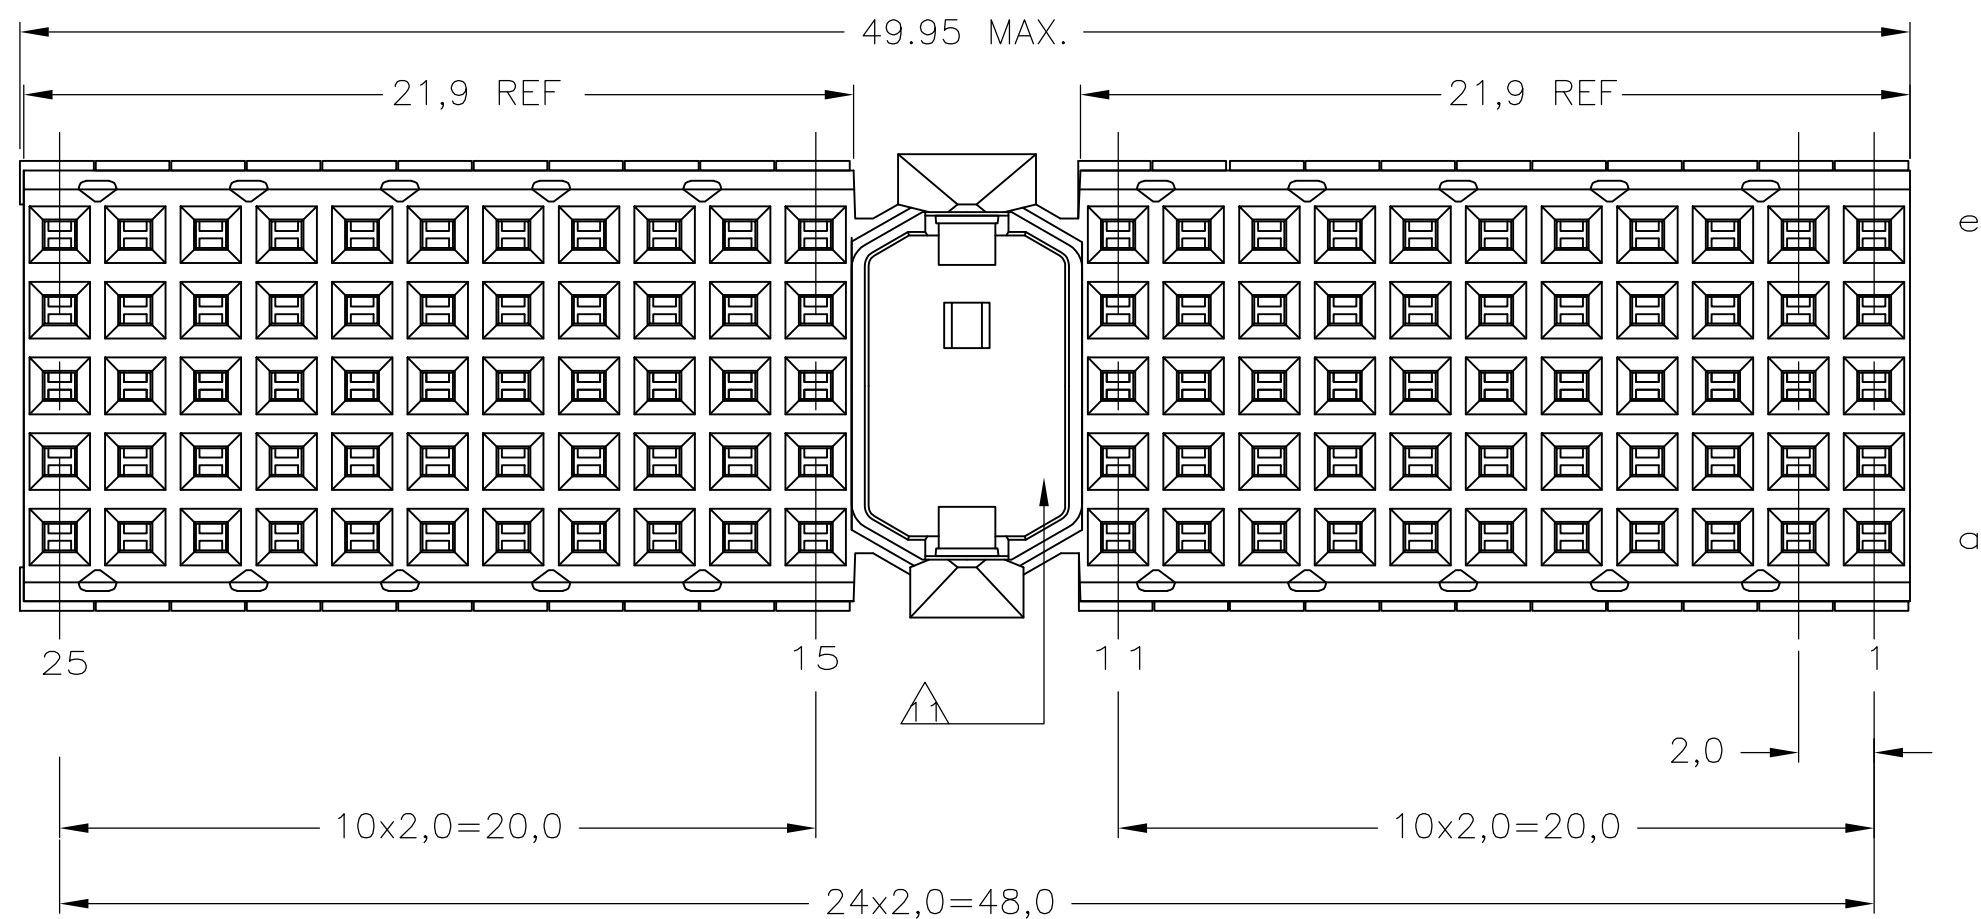
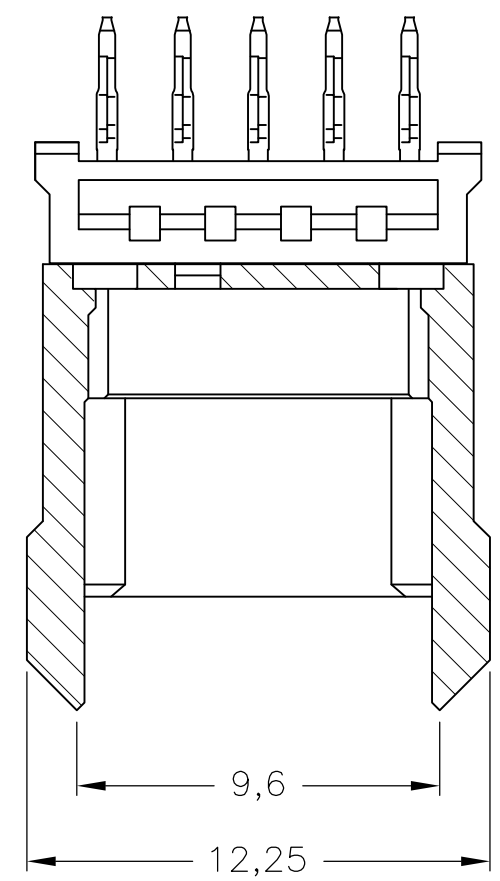
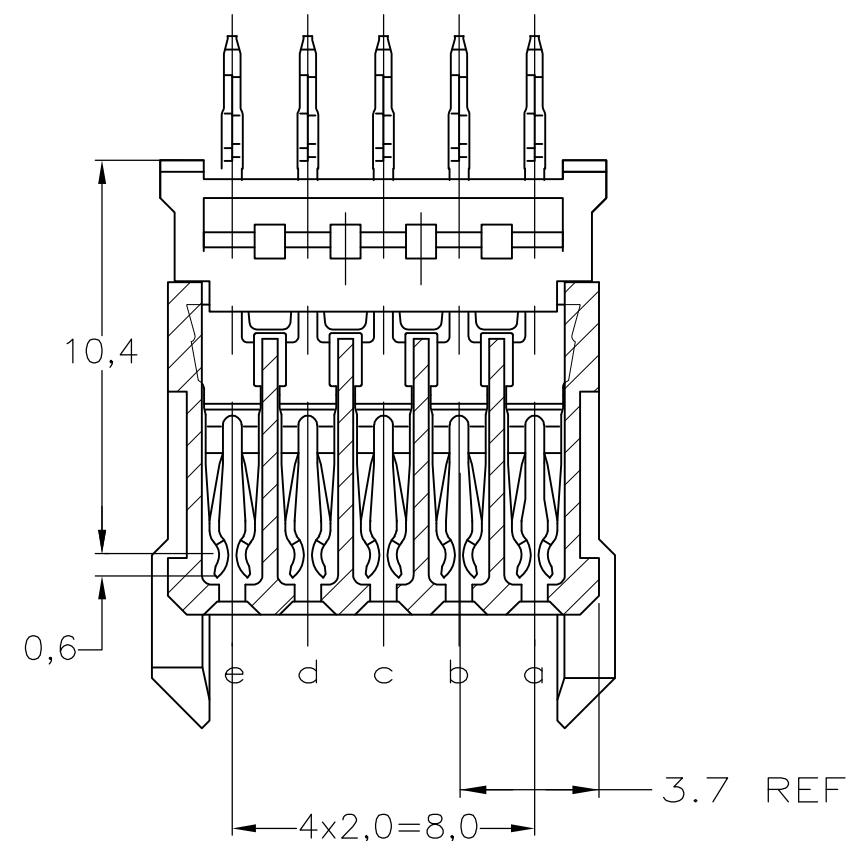


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	J	ECR-16-013297	21JUL2017	FL	SY

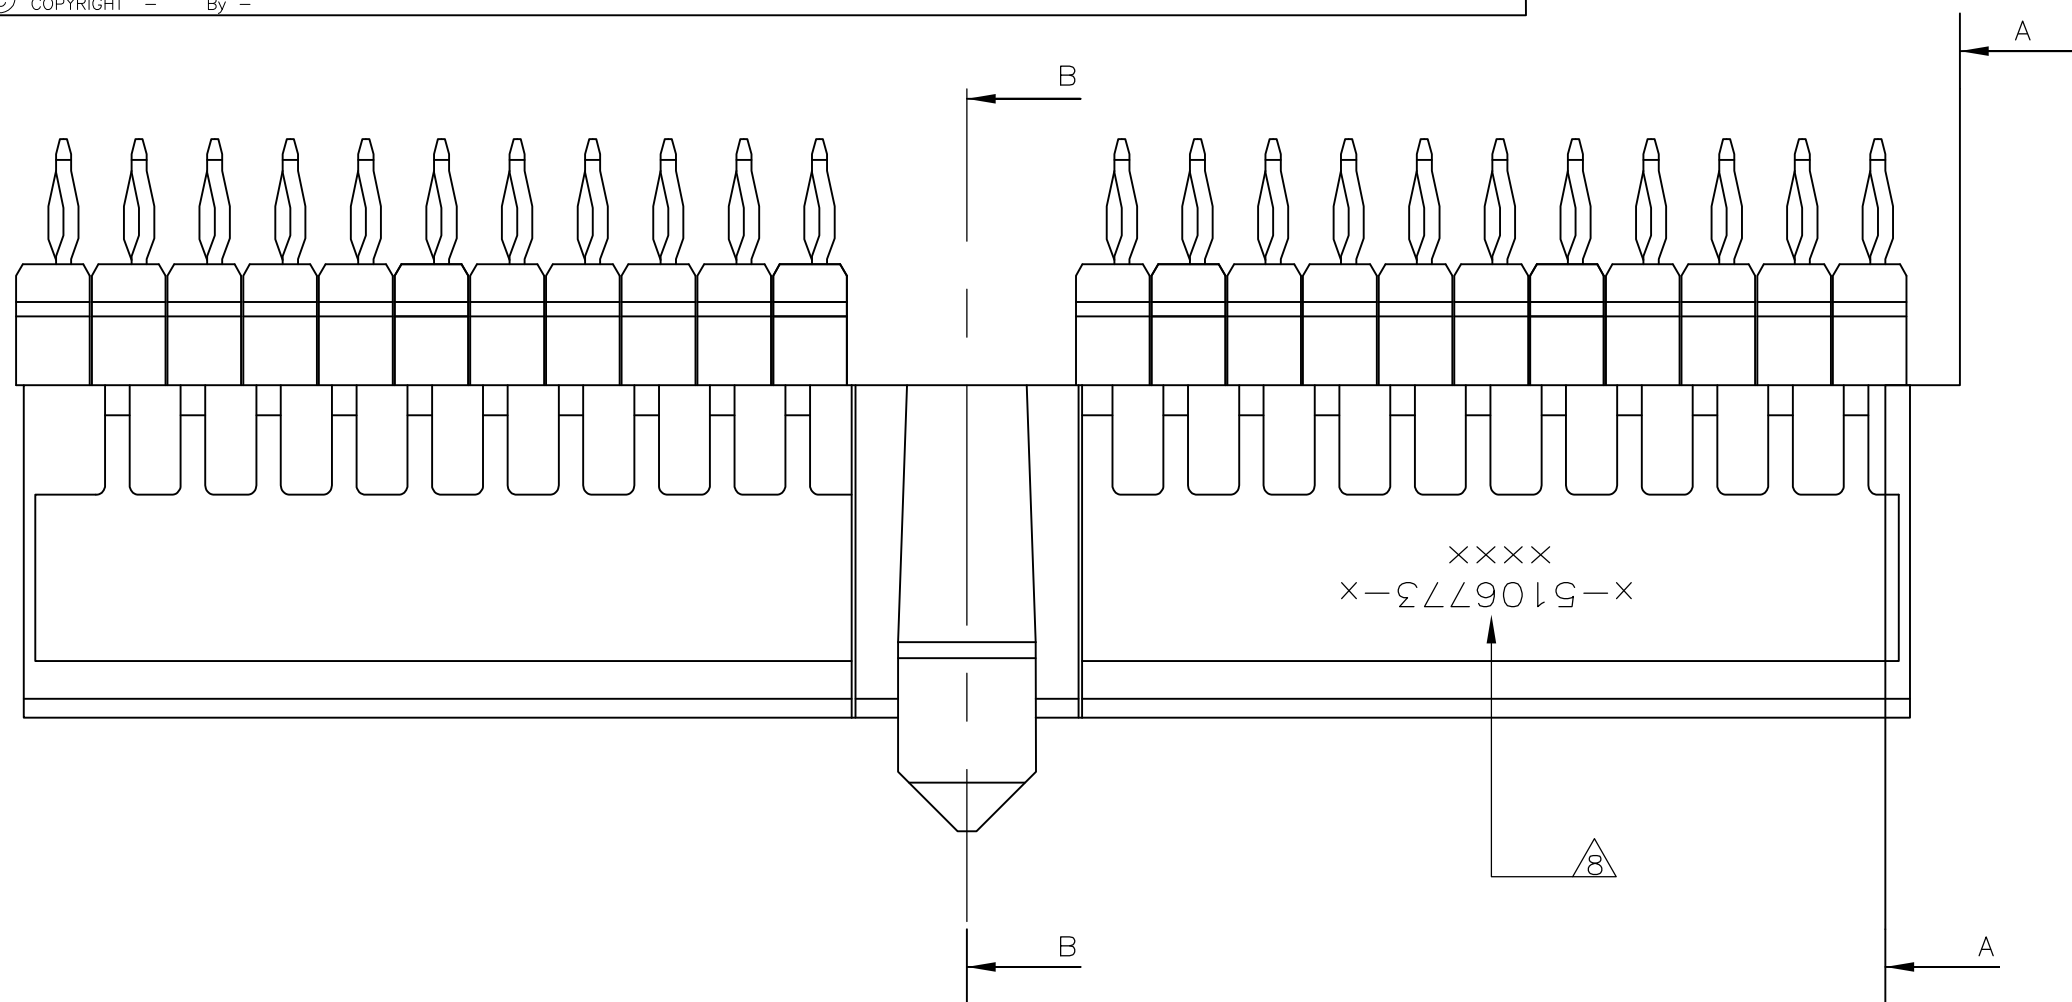


NOTES:

- ① MATERIAL CONTACT: PHOSPHORBRONZE
MATERIAL HOUSING: GLASSFILLED POLYESTER
UL-RATING 94V0 (GRAY).
- ② GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- ③ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.
- ④ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.
- ⑤ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⑥ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, UNCONTROLLED ENVIRONMENT APPLICATIONS.
- ⑦ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.
- ⑧ CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE.
- ⑨ PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID (110 HOLES).
- ⑩ HOLES IN ROW f AND z FOR POSSIBLE FUTURE USE OF
GROUND RETURN SHIELD. (SHIELDS NOT YET TOOLED).
AREA RESERVED FOR KEYING PART (BASIC P.N.:100526).
- ⑪ 0.76μm MIN GOLD PLATING AT MATING SURFACE.

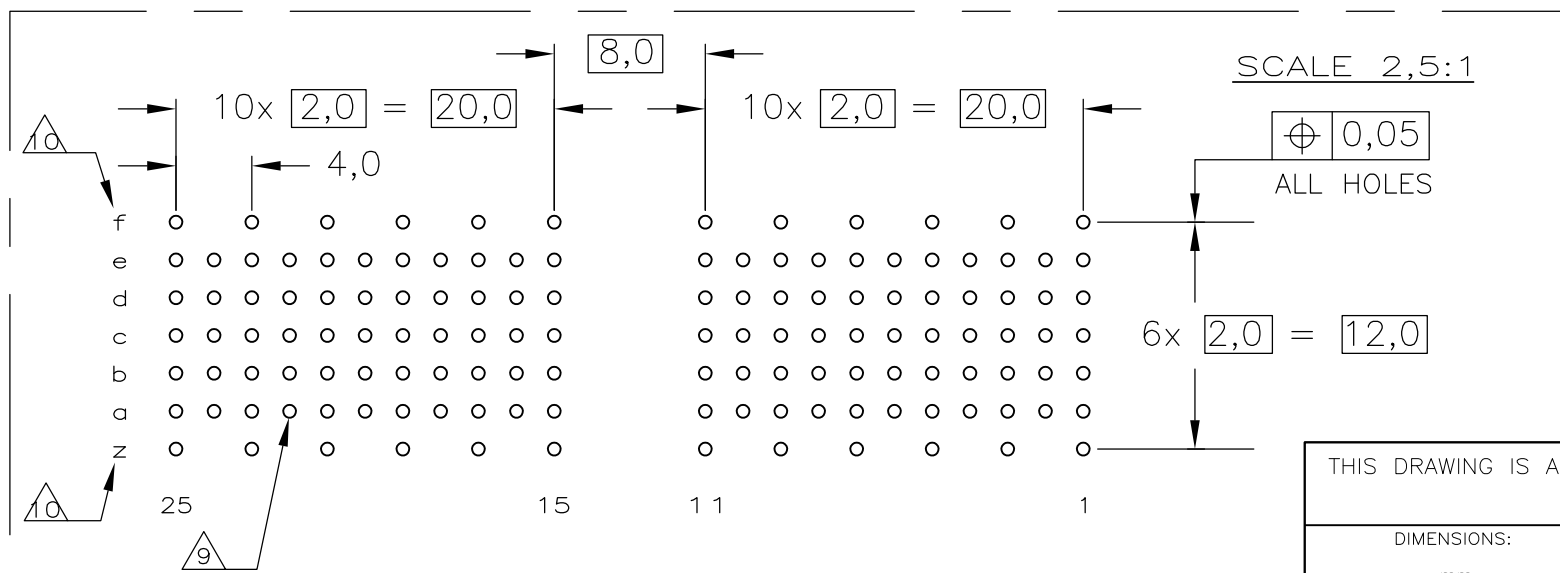

OBSOLETE	— 		3-5106773-0
OBSOLETE	— 		1-5106773-9
			5106773-9
OBSOLETE	— 		5106773-4
			5106773-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 12AUG2004 CHK B.MOOIJ 27OCT2004 APVD B.MOOIJ 27OCT2004		 TE Connectivity	
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0-PLC ± 1-PLC ± 2-PLC ± 3-PLC ± 4-PLC ± ANGLES ±			
MATERIAL -		PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029 WEIGHT 0.00000		NAME Z-PACK 2mm HM TYPE A 110 POS. VERTICAL FEMALE CONNECTOR ASSEMBLY SIZE A2 CAGE CODE 00779 DRAWING NO C-5106773 RESTRICTED TO -	
FINISH -		CUSTOMER DRAWING		SCALE 5:1 SHEET 1 of 1 REV J	