


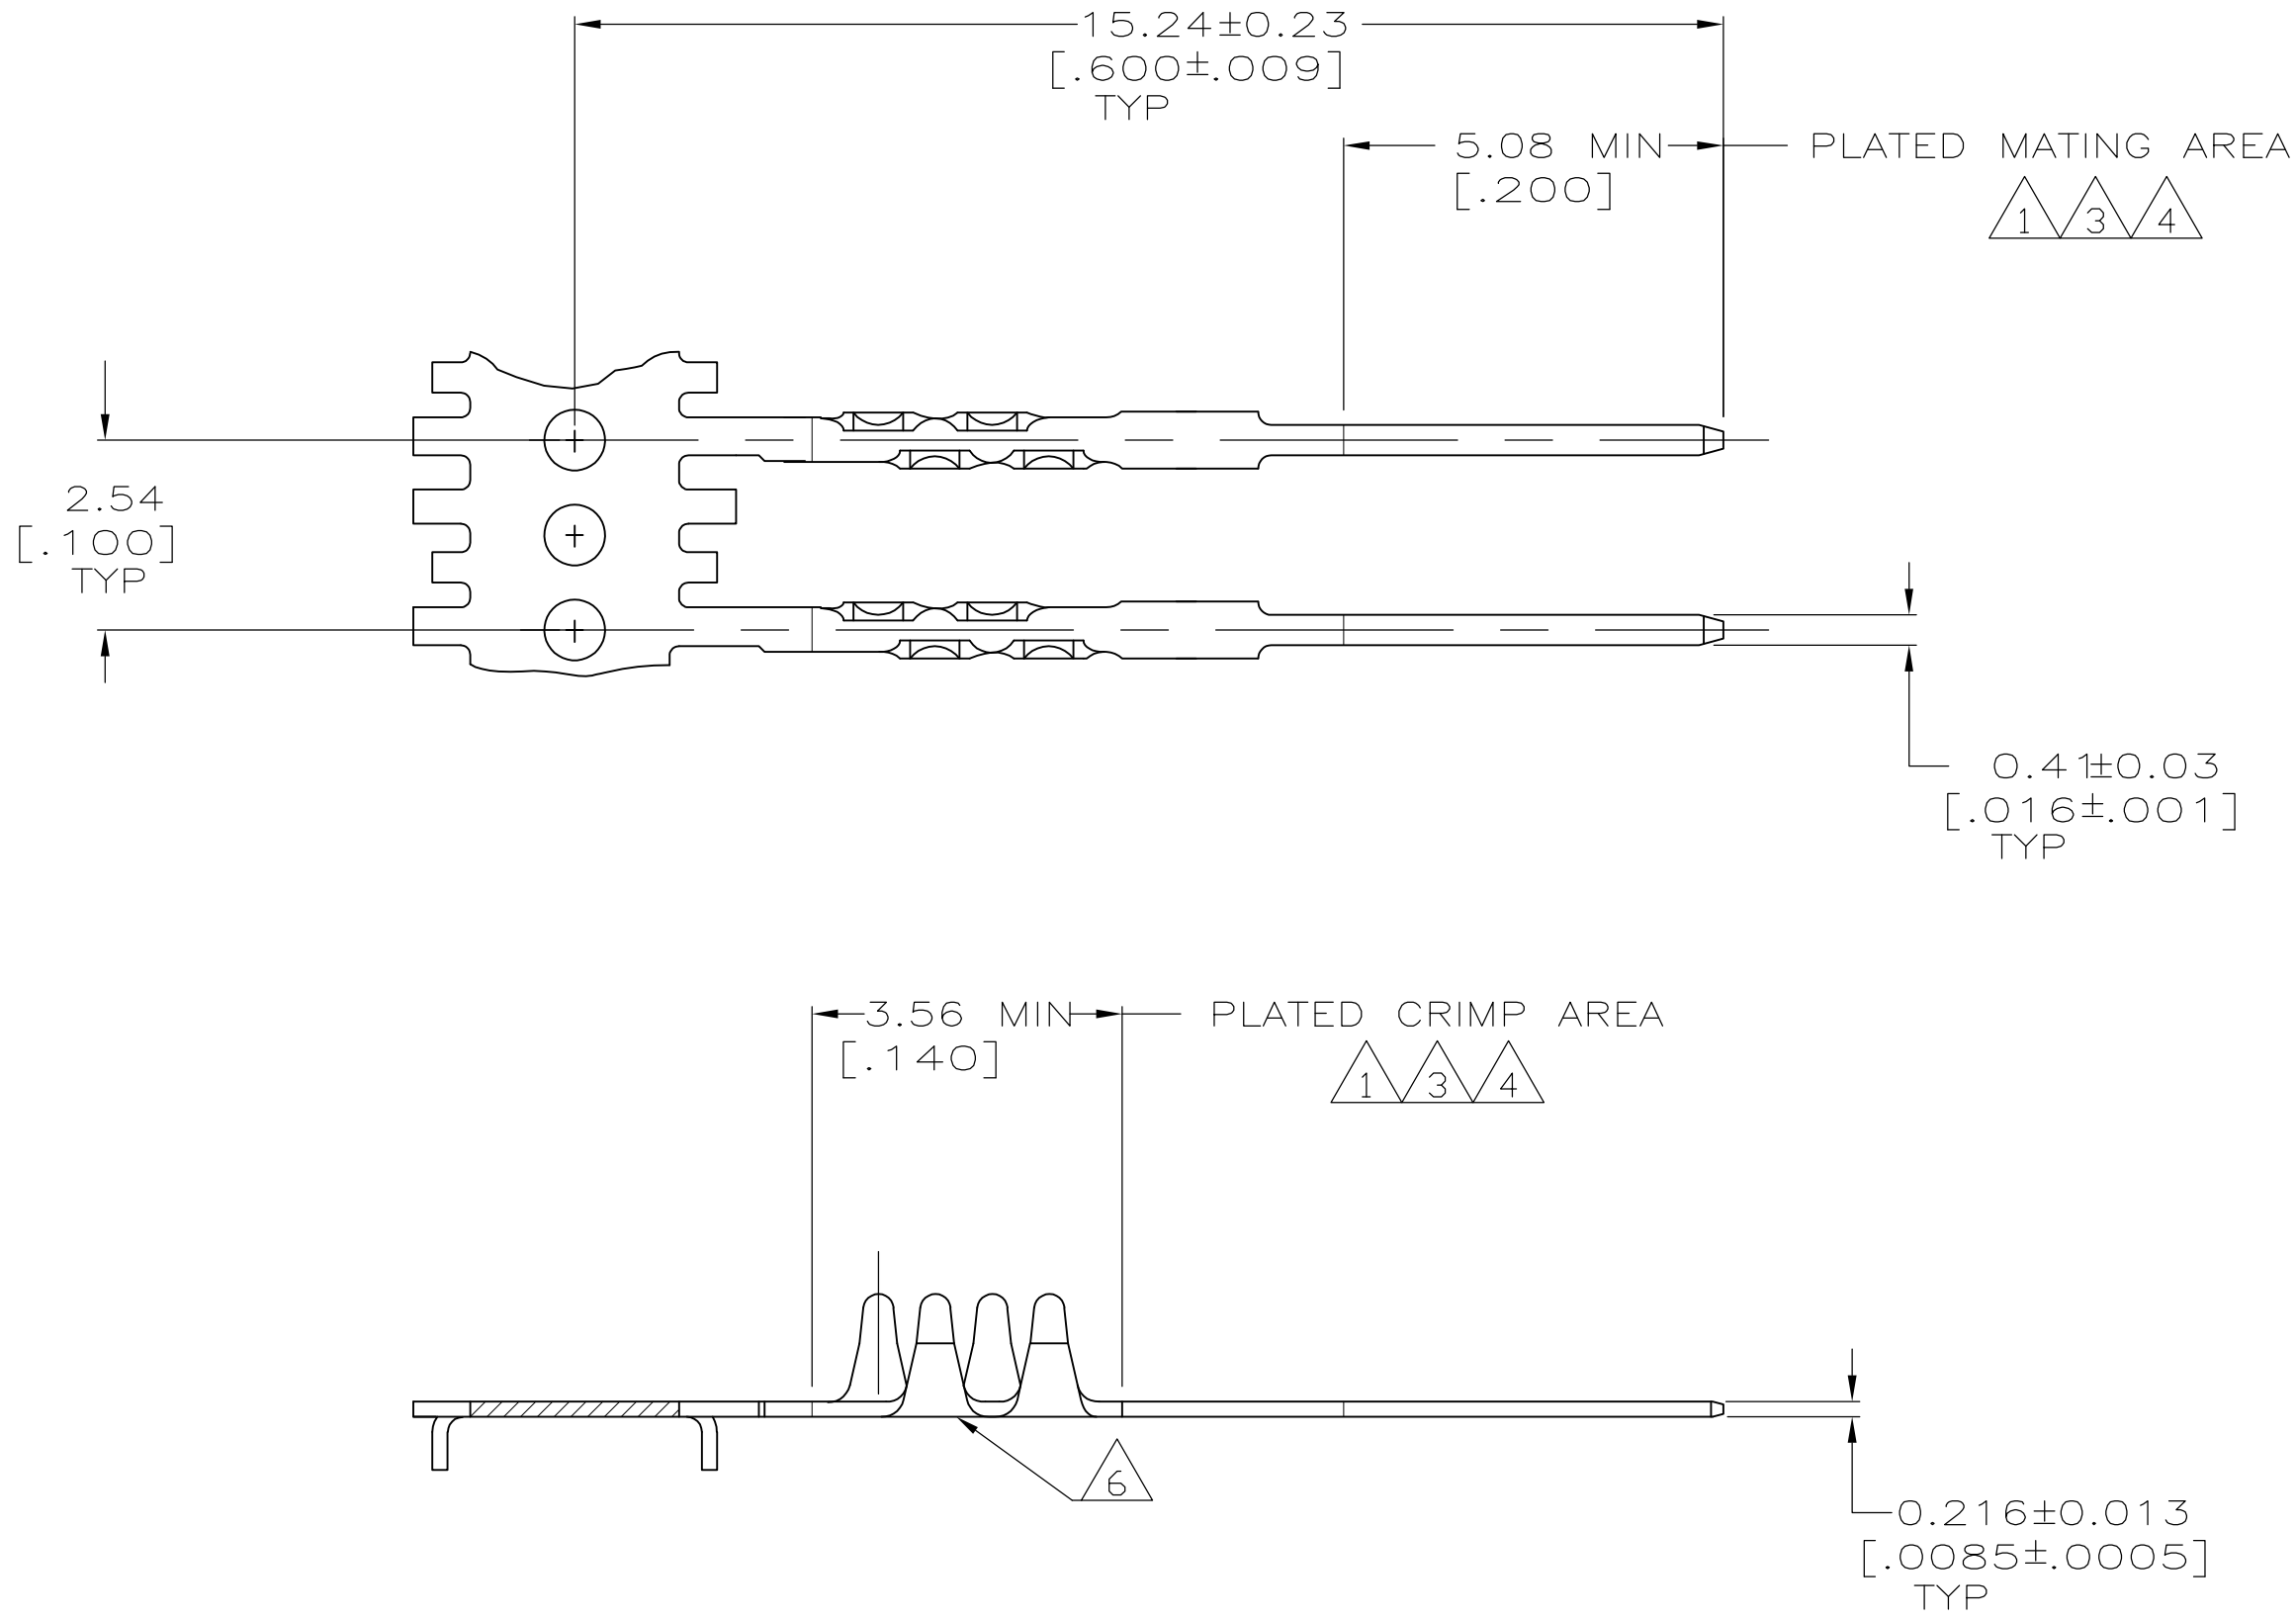

- 1 0.38μm[.000015] MIN GOLD ON MATING AREA,
1.27μm[.000050] MIN BRIGHT TIN-LEAD ON CRIMP AREA, BOTH OVER
1.27μm[.000050] MIN NICKEL.
- 2 2.54μm[.000100] MIN BRIGHT TIN-LEAD, OVER
1.27μm[.000050] MIN NICKEL.
- 3 GOLD FLASH ON CRIMP AREA,
2.54μm[.000100] MIN TIN ON MATING AREA, BOTH OVER
1.27μm[.000050] MIN NICKEL.
- 4 0.38μm[.000015] MIN GOLD ON MATING AREA,
GOLD FLASH ON CRIMP AREA, BOTH OVER
1.27μm[.000050] MIN NICKEL.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 6 GOLD PLATING MAY OR MAY NOT BE PRESENT ON THE BOTTOM OF THE CRIMP BARREL

5 OBSOLETE	4	487923-5
3	6	487923-4
5 OBSOLETE	1	487923-3
	2	487923-1
FINISH		PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	0.13[.005]
3 PLC	±	-
4 PLC	±	-
ANGLES	±	-

MATERIAL
PHOSPHOR BRONZE

FINISH
SEE TABLE

DWN C.OBERMAN 3-7-90
CHK R.STONE 3-8-90
APVD -
PRODUCT SPEC -
APPLICATION SPEC -
WEIGHT -

CUSTOMER DRAWING

TE Connectivity

CONTACT, SOLDER TAB,
.050 C/L
-

SIZE A2
CAGE CODE 00779
DRAWING NO C=487923
RESTRICTED TO -

SCALE 10:1
SHEET 1 OF 1
REV D1