


Bestückungsplan / contact layout

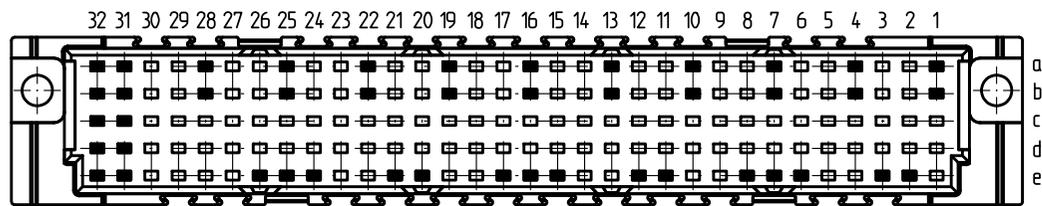

Tauchlötanschluß 0,65 x 0,3 mm / solder terminal 0,65 x 0,3 mm

Isolierwerkstoff / housing material : PBT GF30


Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Maße und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2

Leiterplatten-Lochbild / PCB drillhole pattern

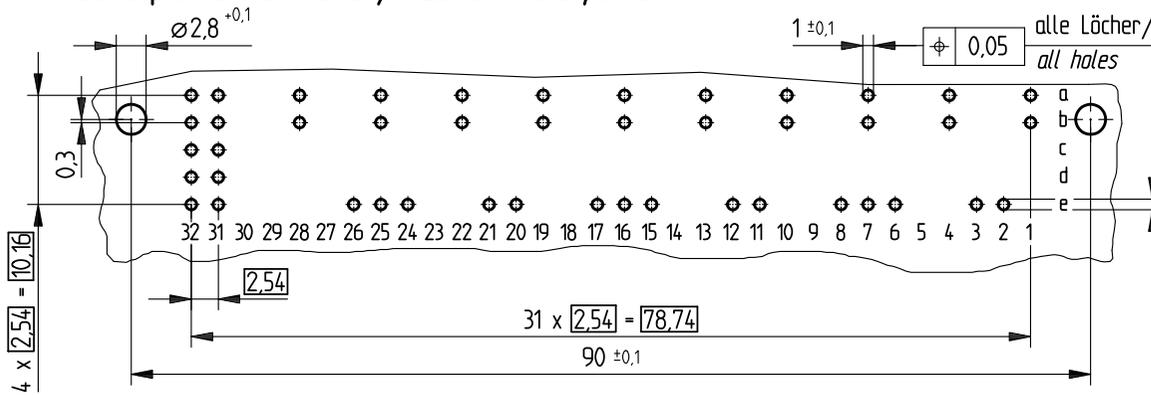

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

Information: Reihe abcode 31, 32, Reihe ab 1, 4, 7, 10, 13, 16, 19, 22, 25, 28 Reihe e 2, 3, 6-8, 11, 12, 15-17, 20, 21, 24-26 bestückt / row abcode 31, 32 row ab 1, 4, 7, 10, 13, 16, 19, 22, 25, 28 row e 2, 3, 6-8, 11, 12, 15-17, 20, 21, 24-26 assembled Consider protection memo from DIN 34	Tolerances All Dimensions in mm	Scale 2:1
	Subject to modification without prior notice. Drawing will not be updated.	Designation Federleiste E 45 Löt Fem. Connector E 45 Solder
All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	www.ERNI.com	284962
Index	Date	H:00065720.SZA STVE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[ERNI Electronics:](#)

[284962](#)