




TOP VIEW

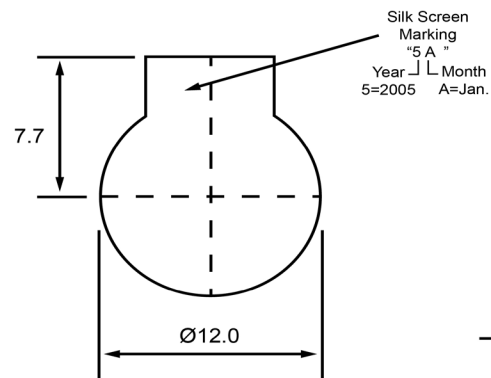


SIDE VIEW (1)

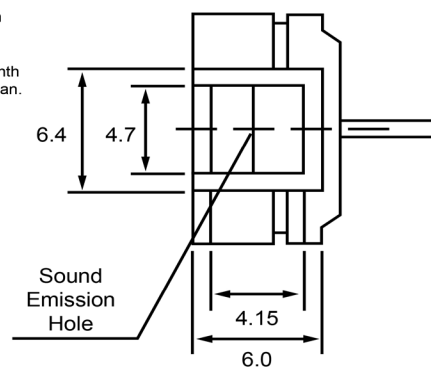

SIDE VIEW (2)

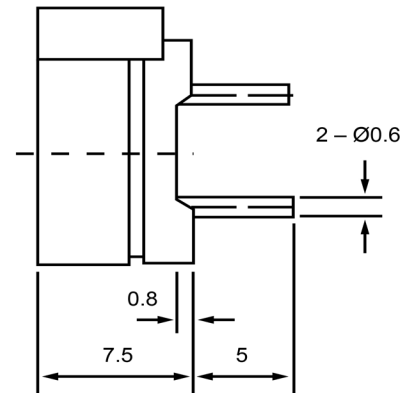

BOTTOM VIEW

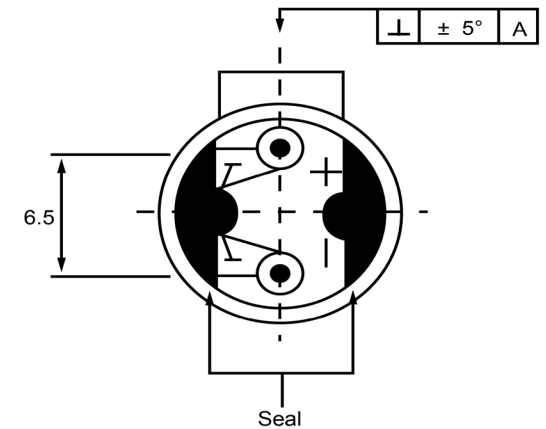

Specifications

Description	Value	Unit
Technology	Electro-Mechanical	
Resonant Frequency	2,048	(Hz)
Rated Voltage	1.5	(V)
SPL @ 10cm	85	(dBA)
Coil Resistance	6.5	(ohm)
Mount Type	Thru-hole	
Voltage Range	1 ~ 3	(V)
Max Rated Current	80	(mA)
Housing Material	NORYL	
Operating Temperature	-20 ~ +60	°C
Storage Temperature	-20 ~ +60	°C
Weight	2	(g)

Notes

- 1) All dimensions are in mm unless otherwise noted
 2) All parts meet RoHS



DB UNLIMITED

Electro-Mechanical Transducer

Revision History

Version	Description			Date	Approved
1	Released from Engineering			10/21/2013	J.S

TE122001-3