

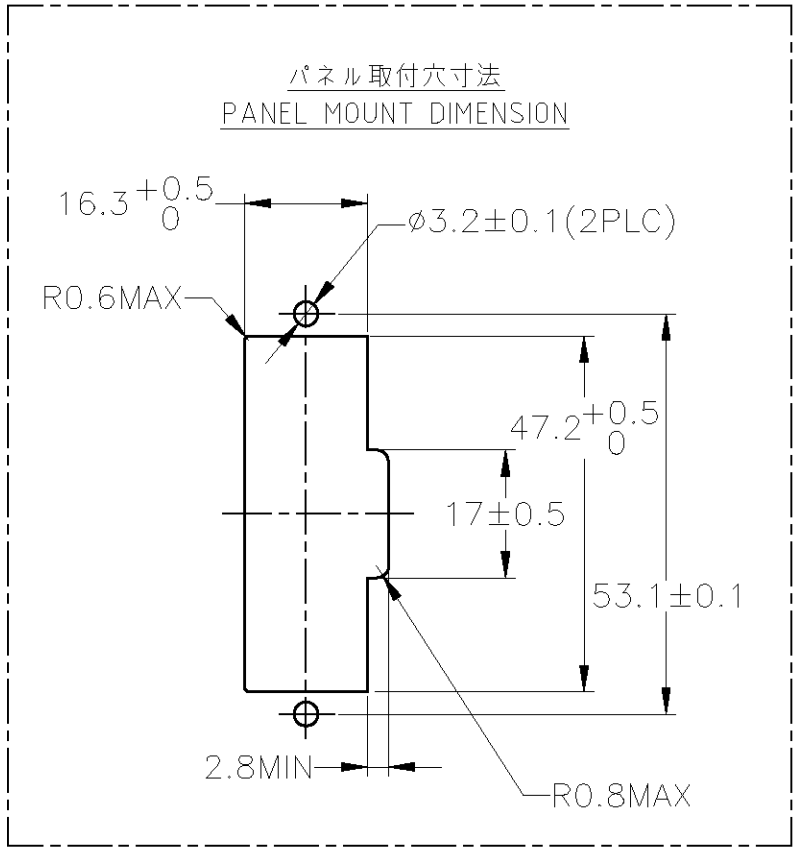


LOC J	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			A1	REVISED ECR-08-031766	08DEC08	SF	KB

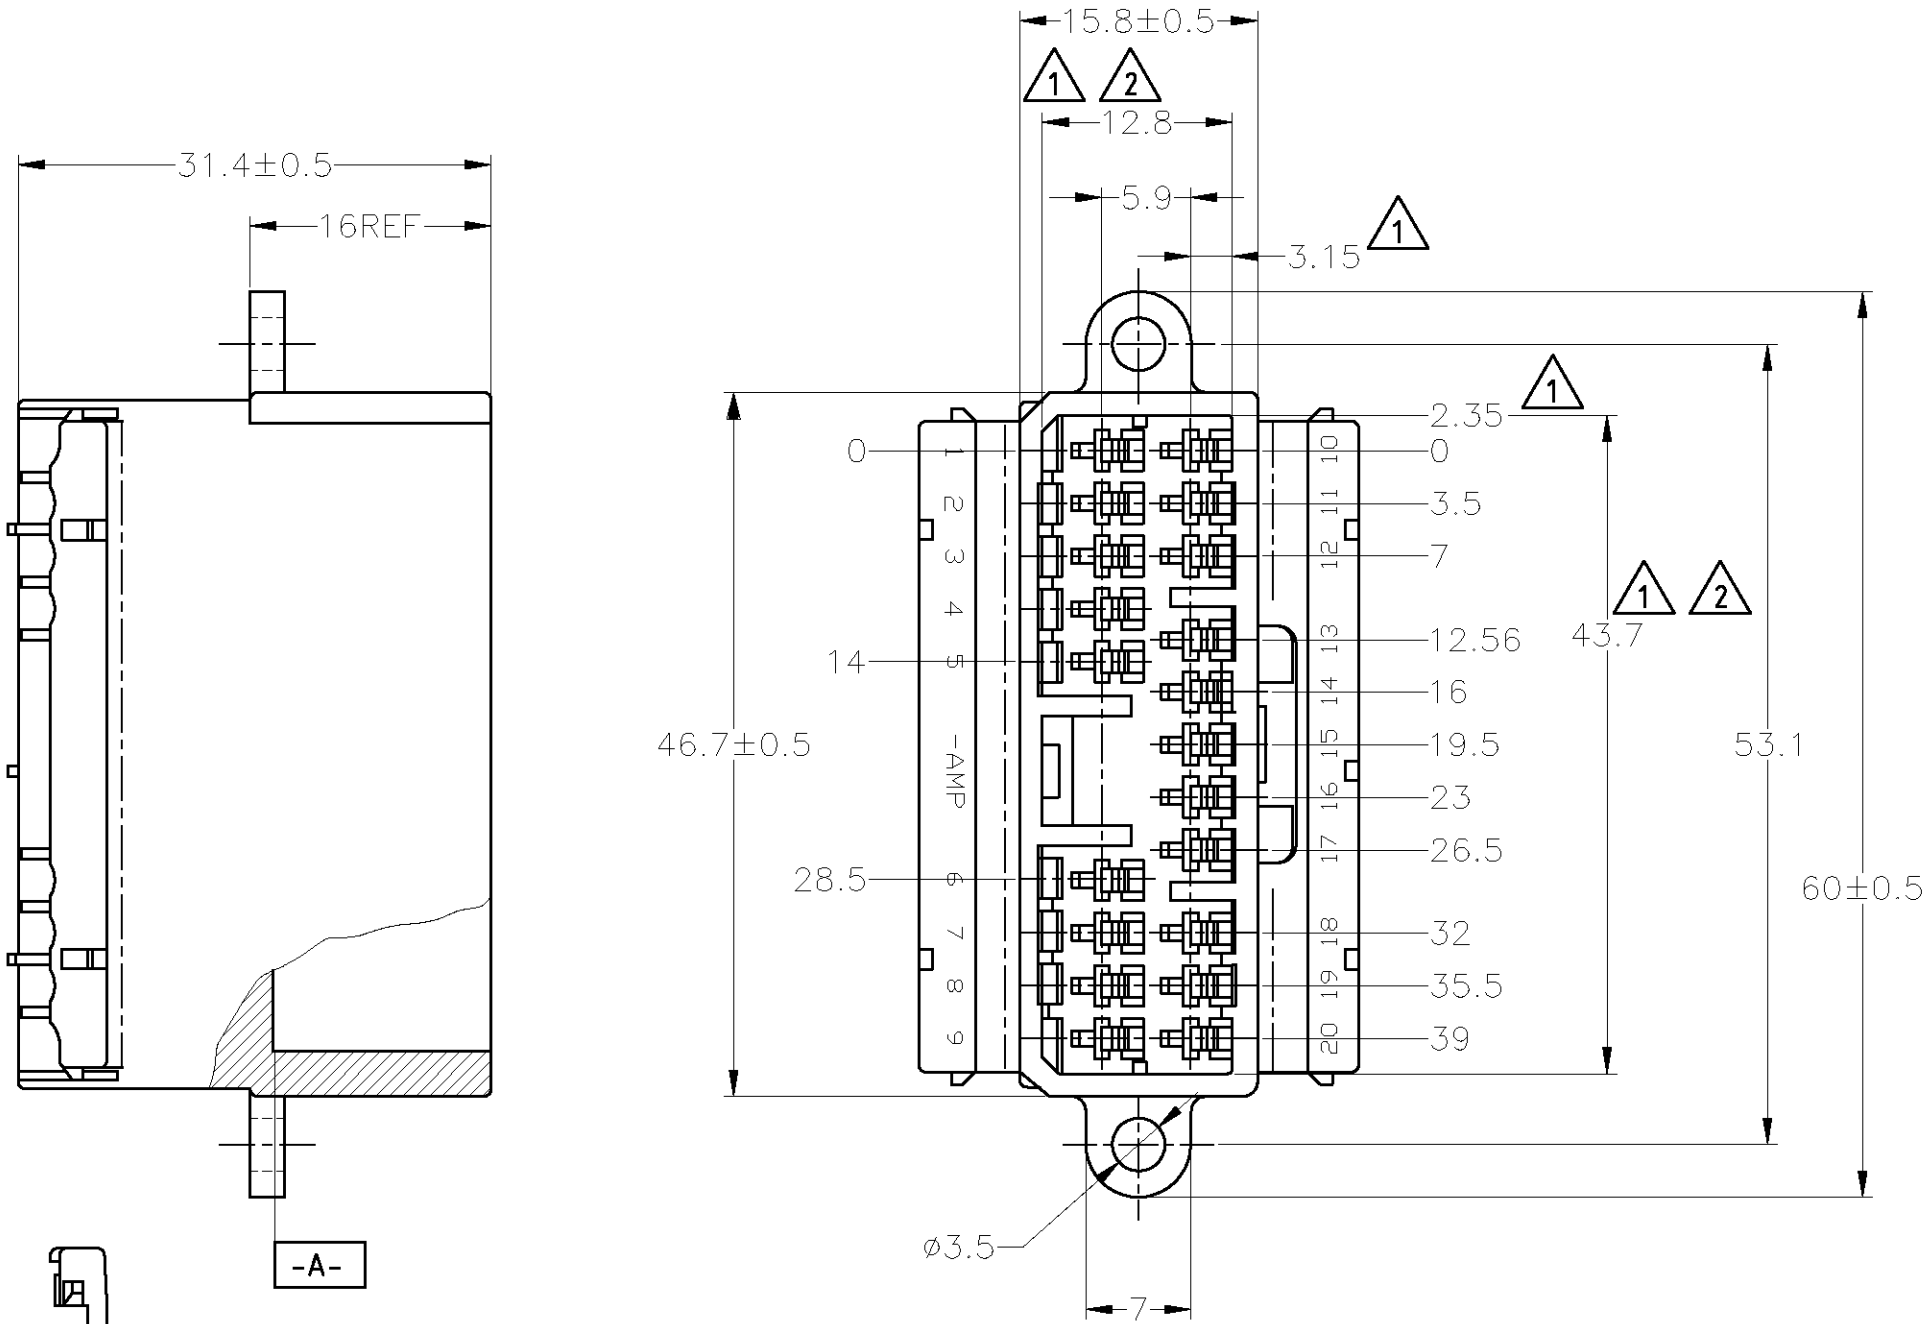

1. MUST BE KEPT BETWEEN **-A-** AND 2
2. TO BE MATED WITH PLUG HOUSING SMOOTHLY
3. APPLIED TAB CONTACT; P/N 173633 AND 173645
4. APPLIED PLUG HOUSING; P/N 174952 etc
1. **-A-** 面より2mmの範囲で測定
2. 相手ハウジングと所定の機能を満足して嵌合できること
3. 内装するタブコンタクトは型番 173633、173645
4. 嵌合相手ハウジング型番 174952 他

V-2	白 (WHITE)	1-174938-1
HB	橙 (ORANGE)	174938-8
	白 (WHITE)	174938-1
使用材料難燃グレード (FLAMMABILITY OF MATERIAL)	色 (COLOR)	型番 (PART NUMBER)

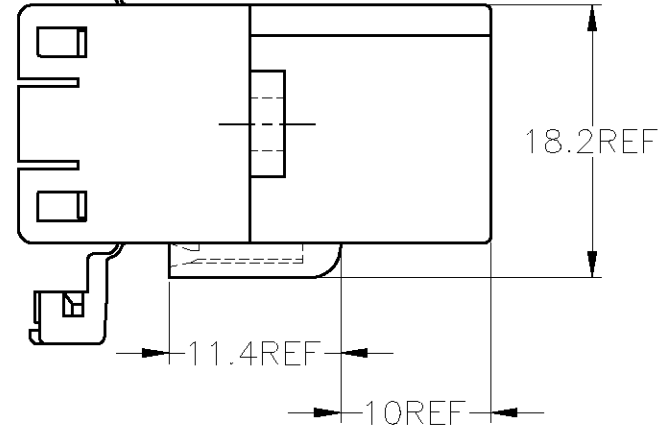

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
PBT

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±—
1 PLC	±—
2 PLC	±—
3 PLC	±—
4 PLC	±—
ANGLES	±—
FINISH	—

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

10±	: ±0.2
30±	: ±0.25
> 30	: ±0.3
ANGLE	: ±3°

DWN
S.FUJITA
08DEC08

CHK
K.BETSUI
08DEC08

APVD
K.BETSUI
08DEC08

PRODUCT SPEC
—

APPLICATION SPEC
—

WEIGHT
—

CUSTOMER DRAWING

Tyco
Electronics

Tyco Electronics Corporation
Kawasaki, Japan

NAME
070 SERIES MULTILOCK CONNECTOR
20POSITION CAP HOUSING WIRE TO WIRE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-174938	—

SCALE 2:1

SHEET 1 OF 1

REV A1