


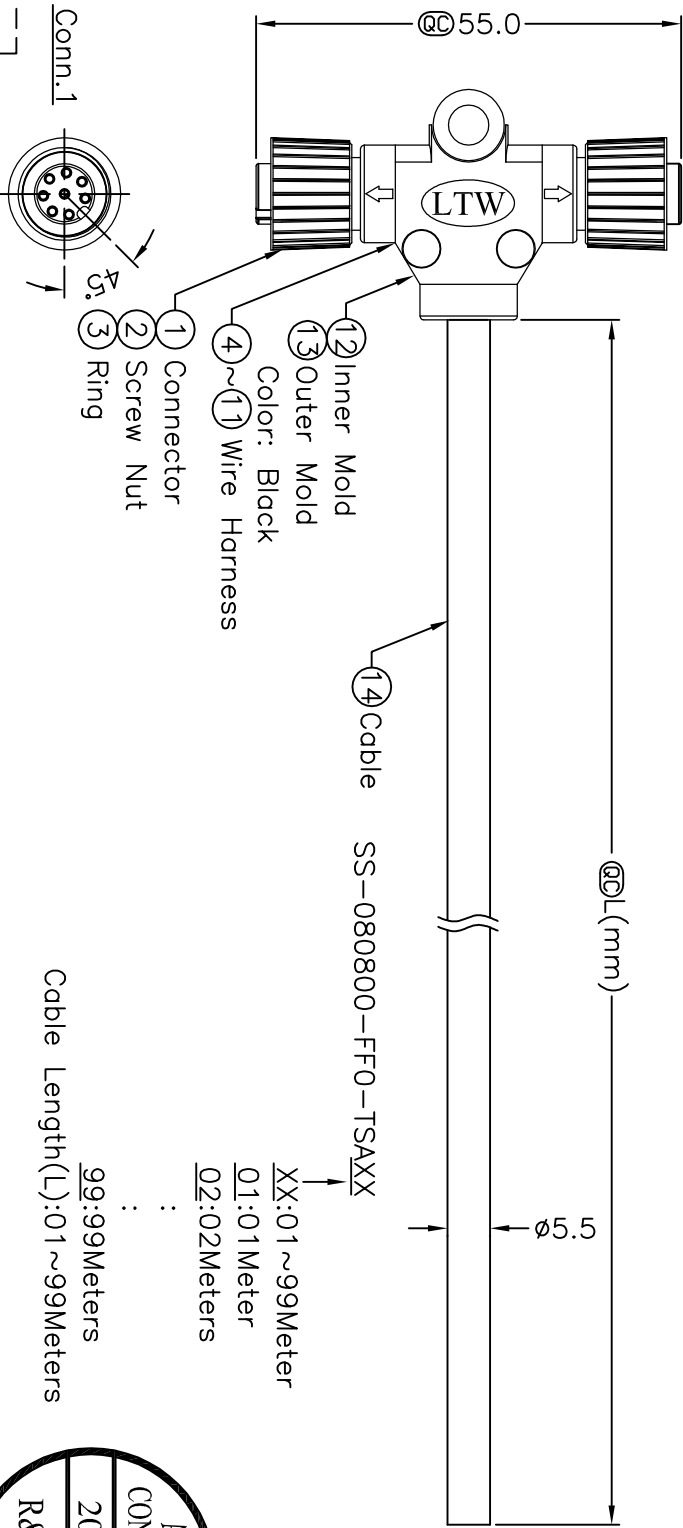


REV.	ECN NO.	DATE	SIGN	DESCRIPTION



Conn.1 & Conn.2
Pin Assignments
Front View


8	Gray	8
7	Purple	7
6	Blue	6
5	Green	5
4	Yellow	4
3	Orange	3
2	Red	2
1	Brown	1
Conn.1	Wire Color	Conn.2



Note:
* **QC** Important Dimension.
* Waterproof Rate: IP68
* Housing: Black, PU
* Female Pin: Copper Alloy, Gold Plated
* Wire Harness: UL1007 24AWG, 8Pcs.
* Cable: UL2464 22AWG*8C+Talc
Black, PVC Jacket UV Resistant OD=5.5mm
* Cable Length Tolerance: 1M~10M±5%mm,
11M~99±500mm.

Cable Length(L):01~99Meters
99:99Meters
:
:
:
02:02Meters
01:01Meter
XX:01~99Meter

Cable Length(L):01~99Meters



UNIT:mm		TITLE	M12 Conn T Cable Screw	ITEM NO	DRAWN BY	DATE
TOLERANCE		SCALE	FF Conn FF Pin	DWG NO	CHECKED BY	DATE
±0.5 mm		REV.	A	SIZE	A4	SHEET
1	2	3	4	5	6	7
Amphenol LTM						
安費諾亮泰企業股份有限公司						
CUSTOMER						
ALTM						
APPROVED BY						
DATE						
2008/01/04						
8 FMM0702-01-0142						