


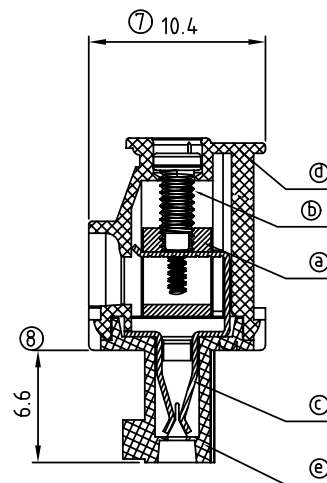

N = Number of contacts

DIMENSION	
A	NX3.5
B	(N-1)X3.5

Poles	Tolerance
2P-8P	±0.10
9P-16P	±0.20
17P-24P	±0.30

SIGN	DATE	DESCRIPTION	APPROVER
△	8/07'06	Added VDE standard	梁仁松
△	2008.12.02	With flange screw changed from "-solt type to "+/-solt type	Jacke
△	2008.12.02	The temperature changed from -30℃,+105℃ to -40℃,+115℃	Jacke
△	2008.12.02	The dimension design changed from 19.1mm to 19.3mm	Jacke
THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!			

Material

- Item④ Terminal body(metal housing): Brass(CuZn),Nickel plated
 - Item⑤ Terminal screw: Steel Zinc plating “-” slot type
 - Item⑥ Wire guard: PbZ, Tin plated
 - Item⑦ Insulator (housing): Thermoplastic (UL94V-0)
 - Item⑧ Insulator (cover): Thermoplastic (UL94V-0)
 - Item⑨ With flange screw: Steel M2.5 Zinc plating “+/-” slot type
- Electrical cULUS/VDE

- Voltage rating: 300VAC/300VAC
- Current rating: 8A/10A
- Wire range: 1.5mm
- Solid wire(AWG): 16-28
- Stranded wire(AWG): 16-28
- Torque: 1.7Lb-In./0.2Nm
- Screw: M2
- Wire strip length: 6-7mm
- Withstanding Voltage: 1.6KV/2.5KV
- ⚠ ● Operating temperature: -40°C to +115°C
- ⚠ ● Safety approval:  

TS xx 1 1 x C xxxx G

No. OF POLES
02: 2 POLES
:
:
24: 24 POLES

	Color
0	Black (RAL9005)
2	Red (RAL3001/D)
3	Orange(RAL2011/P)
4	Yellow(RAL1018/A)
5	Green(RAL6018/T)
6	Blue (RAL5015/A)
8	Grey(RAL7035/D)

RoHS pb<40,000ppm
0000 Standard @ Logo
000A Standard ANY Logo
Any special item by
customer request,
please contact sales
department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE		TS-3.5mm Series With flange (W/latching hooks on the wire entry side)					
PART NO.		TSxx11xCxxxxG		DWG NO.		8TS0203	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.			Tolerance
		Jacke 2008.12.10	Jacke 2008.12.10		UNIT: mm		X. ±0.50
					SCALE: NONE		X.X ±0.30
					REV.: G		X.XX ±0.10
				SHEET: 01/01			X° ±1°