


DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	-
-	-	-	-

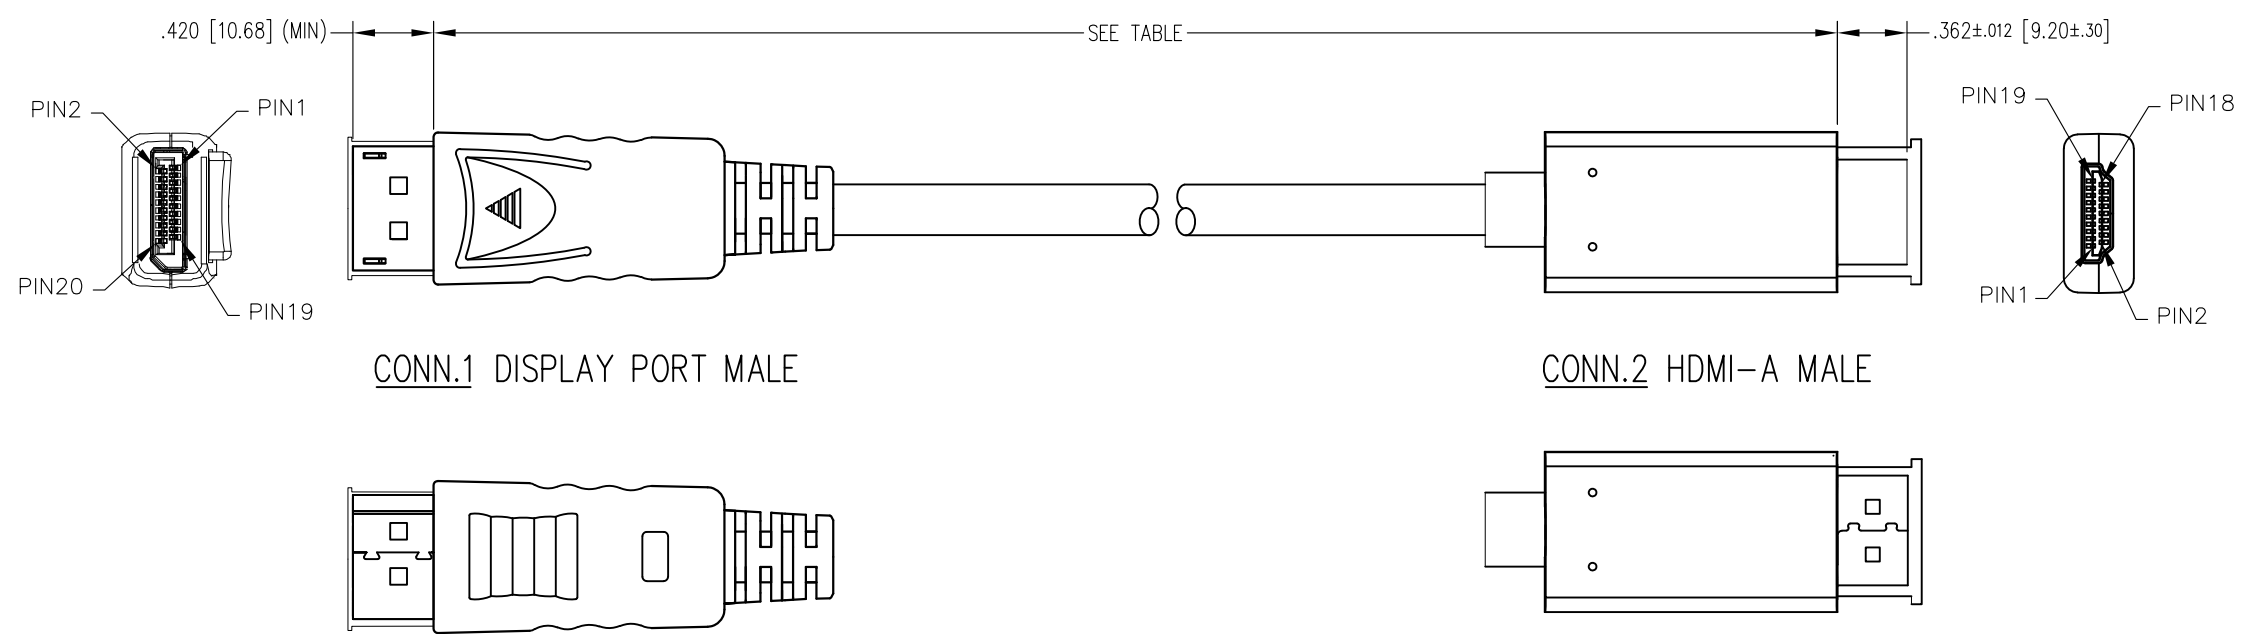


CONN.1 DISPLAY PORT MALE



CONN.2 HDMI-A MALE

NOTES:

- CONNECTOR COMPONENTS:
 TRANSPARENT DUST COVER
 INSIDE MOLDING: PE
 STRAIN RELIEF MOLDING: 45P PVC, BLACK
 OUTSIDE MOLDING:
 DISPLAY PORT: ABS, BLACK
 HDMI-A: 45P PVC, BLACK
 SHELL PLATING: GOLD FLASH
 CONTACT: GOLD PLATING
 DISPLAY PORT CABLE UL20276 (7/0.127TA*PR+EAM)
 *5+7/0.127TA*5C+AEB 85% OD:.29 [7.3] BLACK
- ELECTRICAL TESTING:
 100% OPEN & SHORT & CONTINUITY WIRE TEST
 CONTACT RESISTANCE: 6 OHM(MAX)
 INSULATION RESISTANCE: 10M OHM(MIN)
 HI-POT TEST: DC 100V/10ms
- PACKAGING
 ONE CABLE PER BAG

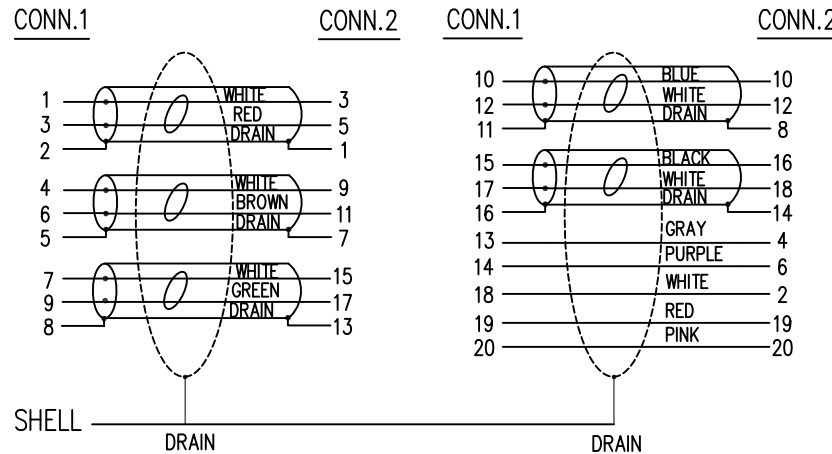

P/N	LENGTH
BC-DH003F	36±1.2 [915±30]
BC-DH006F	72±1.2 [1830±30]
BC-DH010F	120±1.6 [3050±40]



THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
 DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE

DIMENSIONS: INCHES [METRIC]

UNLESS OTHERWISE SPECIFIED
 TOLERANCES ARE ±.005 [0.13]
 ANGLES ARE ± 1°

SHEET NO. 1 OF 1

206 Van Vorst Street
 Jersey City, NJ 07302
 +1 201 432 0463
<http://www.belfuse.com>

TITLE: DISPLAY PORT MALE TO HDMI-A MALE CABLE

DRN BY: JMM	DATE: 05/16/19
APPD BY: ADB	DATE: 05/29/19
DWG NO. CT999192	REV. A0

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL FUSE, INC. AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL FUSE, INC.

B

B

A

A