

B


A

ASSEMBLY FORMAT REV. 6/3/05

2


1

DATE	REV	ECN	APP'D. BY
5/29/19	A0	RELEASED	—
—	—	—	—


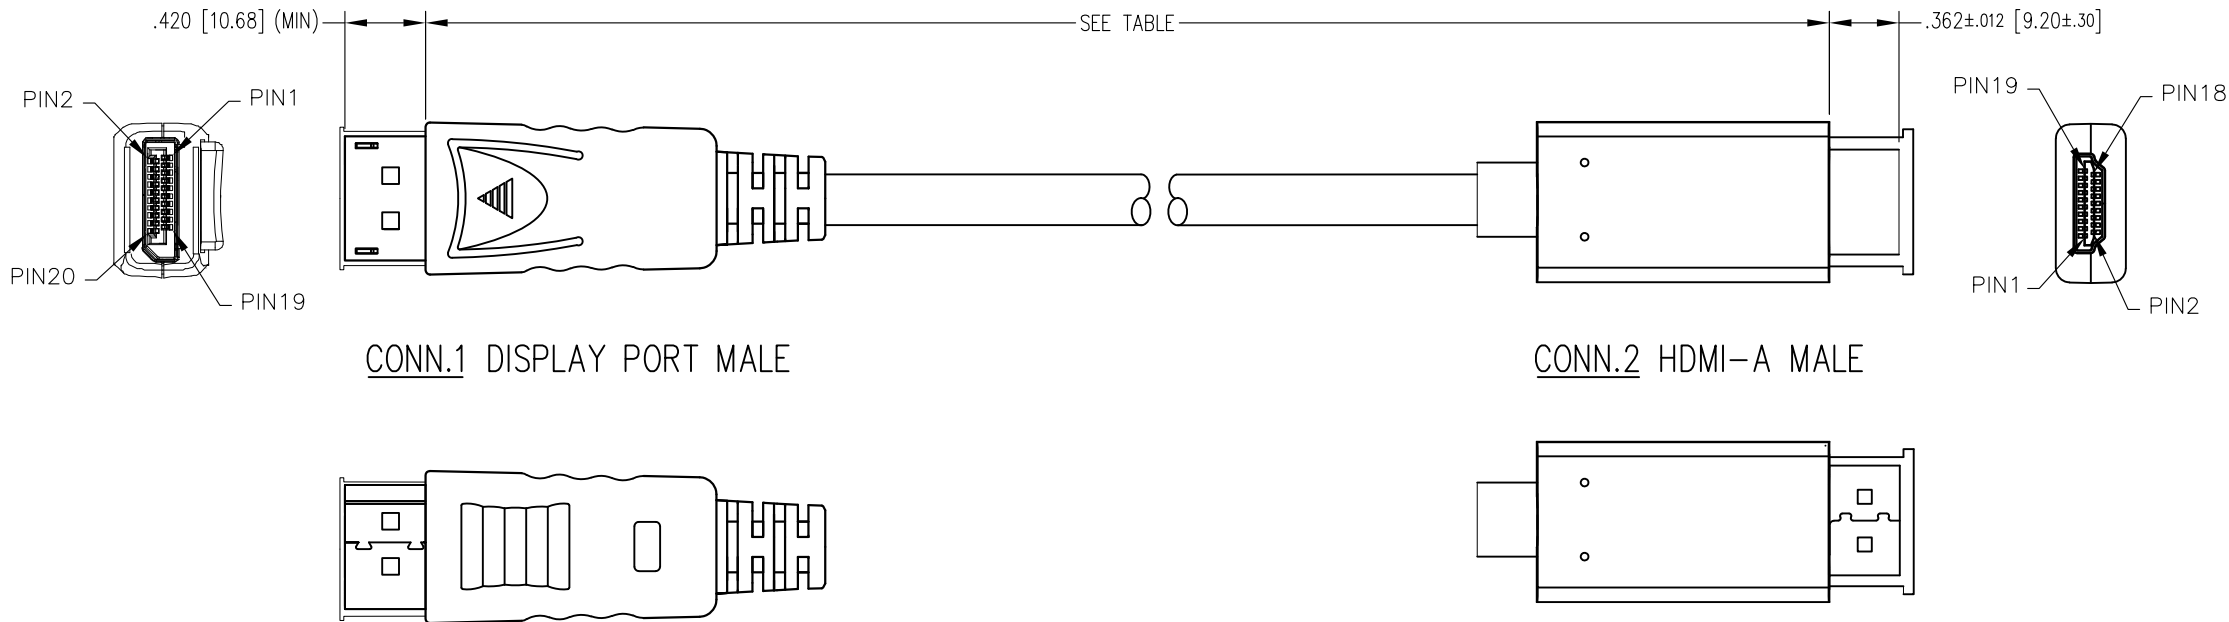


NOTES:

- CONNECTOR COMPONENTS:
TRANSPARENT DUST COVER
INSIDE MOLDING: PE
STRAIN RELIEF MOLDING: 45P PVC, BLACK
OUTSIDE MOLDING:
DISPLAY PORT: ABS, BLACK
HDMI-A: 45P PVC, BLACK
SHELL PLATING: GOLD FLASH
CONTACT: GOLD PLATING
DISPLAY PORT CABLE UL20276 (7/0.127TA*PR+EAM)
*5+7/0.127TA*5C+AEB 85% OD:.29 [7.3] BLACK
- ELECTRICAL TESTING:
100% OPEN & SHORT & CONTINUITY WIRE TEST
CONTACT RESISTANCE: 6 OHM(MAX)
INSULATION RESISTANCE: 10M OHM(MIN)
HI-POT TEST: DC 100V/10ms
- PACKAGING
ONE CABLE PER BAG

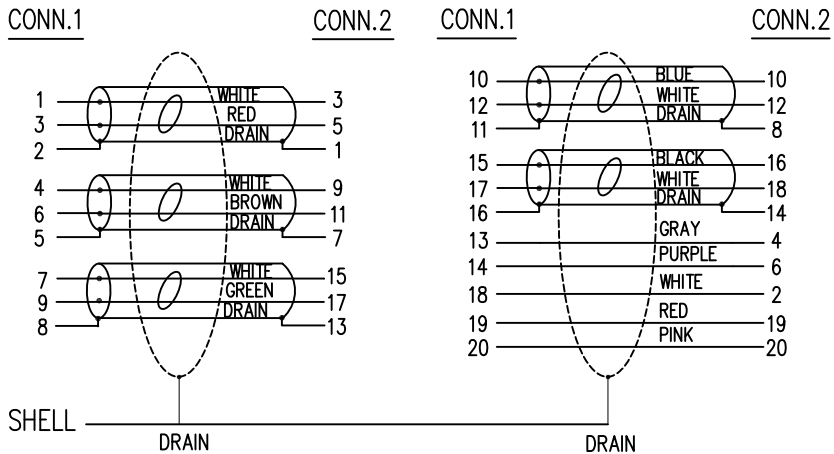

P/N	LENGTH
BC-DH003F	36±1.2 [915±30]
BC-DH006F	72±1.2 [1830±30]
BC-DH010F	120±1.6 [3050±40]



THIRD ANGLE PROJECTION
DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°
SHEET NO. 1 OF 1

	206 Van Vorst Street Jersey City, NJ 07302 +1 201 432 0463 http://www.belfuse.com
TITLE: DISPLAY PORT MALE TO HDMI-A MALE CABLE	
DRN BY: JMM	DATE 05/16/19
APPD BY: ADB	DATE 05/29/19
DWG NO. CT999192	REV. A0

AutoCAD

1

2

B

A