
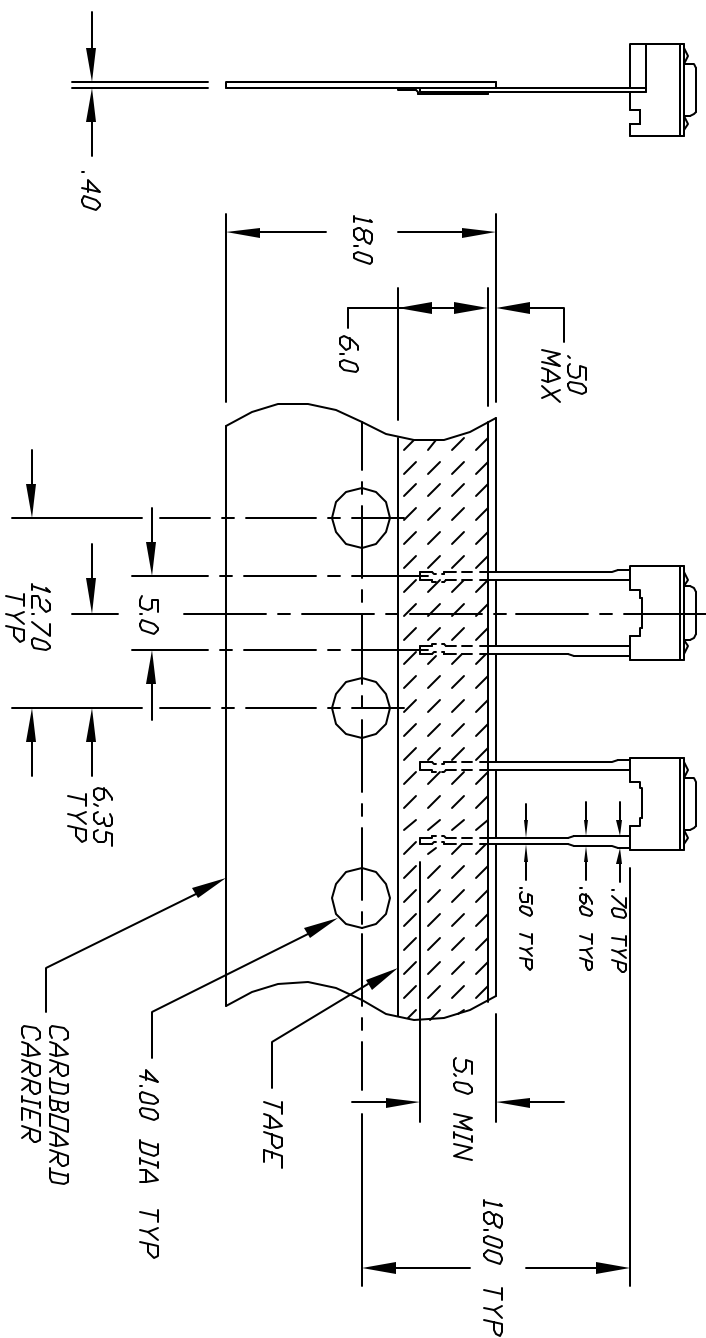


RECOMMENDED PCB LAYOUT

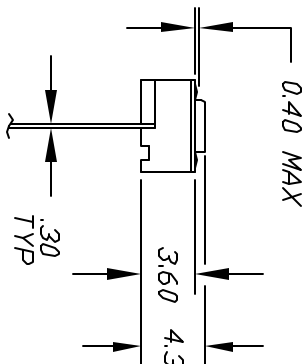

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: 0.0=±0.4
0.00=±0.25
3. RATING: 50mA @12VDC
4. OPERATING FORCE: 260±50gf
5. TRAVEL: 0.25 +0.2/-0.1mm
6. CONTACT RESISTANCE: 100 mlll-ohm max.
7. ELECTRICAL LIFE: 100,000 cycles
8. CARRIER IS FOLDED EVERY 25 PITCHES
(24 SWITCHES PER FOLD)
9. 1,000 SWITCHES PER BOX

(24 SWITCHES PER FOLD) 9. 1,000 SWITCHES PER BOX				E-SWITCH®			
TITLE				TL 59 F260 Q			
SCALE		DATE		DR		DWG	
2:1		7/10/00		MM		P010584	
REV.		ECN NO.		DESCRIPTION		DATE	
A		10743		RELEASED FOR PRODUCTION		7/10/00	
						MM	
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED							
CHKD							