440-135 EMI/RFI, Rotatable Coupling, Shrink Boot Band Adapter for Series 801, 804 and 805 Mighty Mouse

Band-Master ATS® Band Microband 601-061
See Page M-7

Add a boot or overmold for environmental protection (Shown without boot)

Band-Master ATS® Micro Band Tool 601-101
See Page M-7

These thread-on adapters are used with ***Band-Master ATS® Micro Band*** shield termination straps. Choose the smallest cable entry for your wire bundle. ***Straight Entry*** adapters are available in various lengths. ***Straight***, ***45°*** and ***90°*** adapters feature rotatable coupling nuts.

How To Order						
Sample Part Number	**440MS135**	**M**	**08**	**07**	**-7**	**K**
Series (See Table I)	**440MS135** = Straight Entry **440MK135** = 45° Entry **440ML135** = 90° Entry					
Shell Material and Finish	**UCR** = Aluminum/Zinc Cobalt Black **M** = Aluminum/Electroless Nickel **NF** = Aluminum/Cadmium with Olive Drab **ZNU** = Aluminum/Zinc-Nickel with Black Chromate **MT** = Aluminum/Nickel-PTFE **Z1** = Stainless Steel/Passivated					
Shell Size Code	**08**, **14**, **16** (See Dimensions Table)					
Dash No.	**04**, **05**, **06**, **07** (See Dash No. Table)					
Length	Applies to symbol "S", straight only Length in .125 (3.18mm) inch increments (i.e. 7 = .875 inches)					
Band Option	**K** = Pre-coiled Band Supplied (601-061) **B**= Band Supplied (601-060) **Omit** for no band supplied					

Table I: Cover Style		
		
440MS135 Straight Entry	**440MK135** 45° Entry	**440ML135** 90° Entry

NOTES

1. Standard Minimum Length is .75. applies to symbol "S" straight only.
2. Material and Finish
   - Band: 300 series SST
   - O-ring: silicone elastomer

© 2016 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • SuperSeal™ Catalog
Dimensions in Inches (millimeters) are subject to change without notice.

440-135 EMI/RFI, Rotatable Coupling, Shrink Boot Band Adapter for Series 801, 804 and 805 Mighty Mouse

Dimensions														
Shell Size Code	Shell Size Reference		A Thread Class -2B	B Max		C Max.		D Max.		E Max.		F Max.		Max Dash No.
	801 & 804	805		In	mm	In	mm	In	mm	In	mm	In	mm	
08	8	10	1/2-28 UNEF	.70	17.78	.58	14.73	.70	17.78	.74	18.80	.86	21.84	07 See Table I
14	14,15,16,17	18,19	15/16-20 UNEF	1.137	28.88	.69	17.53	.80	20.32	.95	24.13	1.09	27.69	
16	19	21	1 1/16-18 UNEF	1.230	31.24	.71	18.03	.82	20.83	.98	24.89	1.13	28.70	

Table I: Cable Entry and Band Platform Dimensions							
Dash No.	L Dia		M Dia		N Dia		Straight Shrink Boot*
	in	mm	in	mm	in	mm	
04	.250	6.35	.289	7.34	.391	9.93	809S060-1L
05	.312	7.92	.351	8.92	.453	11.51	809S060-2L
06	.375	9.53	.414	10.52	.516	13.11	809S060-3L
07	.438	11.13	.477	12.12	.579	14.71	809S060-3L

*** Shrink Boot MUST be ordered seperately.**

Shrink boot material:
compound 2013 low temperature polyolefin with W2 hot melt adhesive.

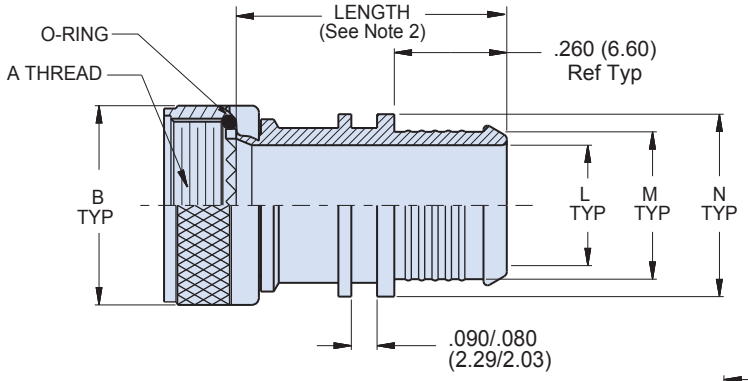

STRAIGHT ENTRY
ROTATABLE COUPLING
440MS135

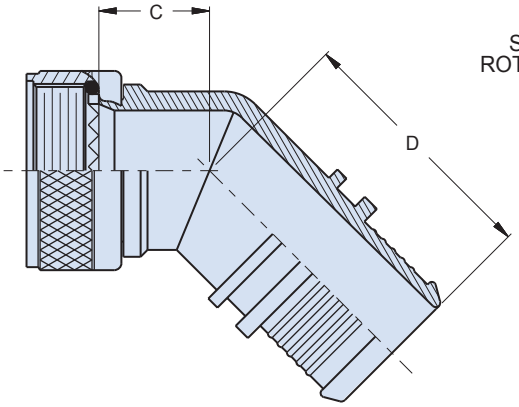

45° ENTRY
ROTATABLE COUPLING
440MK135

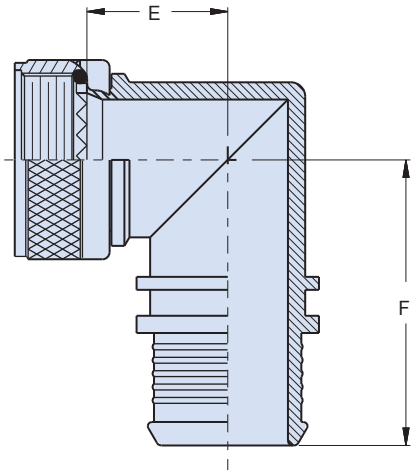

90° ENTRY
ROTATABLE COUPLING
440ML135

© 2016 Glenair, Inc • 1211 Air Way, Glendale, CA 91201 • 818-247-6000 • www.glenair.com • U.S. CAGE code 06324 • SuperSeal™ Catalog
Dimensions in Inches (millimeters) are subject to change without notice.