


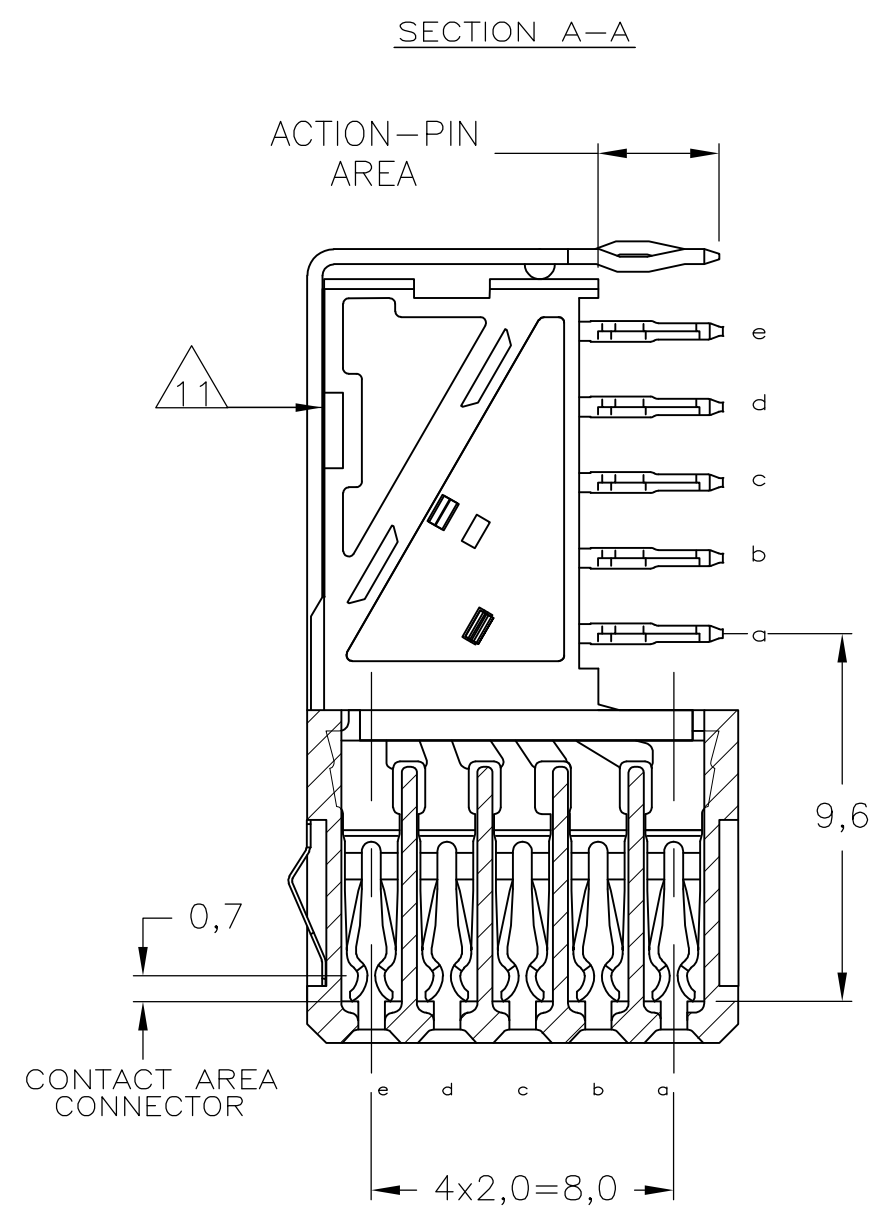

△ MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)

△ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27μm NICKEL MIN. AND ACTION PIN: 0,5μm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE
SPECIFICATION REFERENCE FOR EACH DASH NUMBER.

△ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.

△ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 1.

△ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.

△ CONNECTOR LUBRICATED WITH TELCORDIA GR-1217-CORE
APPROVED LUBRICANT.


△ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.

△ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS
95 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID

△ ROW "f" 10 PLATED THROUGH HOLES FOR UPPERSHIELD
SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE OR ADHESIVE

12 BASIC P.N. LOWERSHIELD : 5352029.


△ 0.76mm MIN GOLD PLATING AT MATING SURFACE

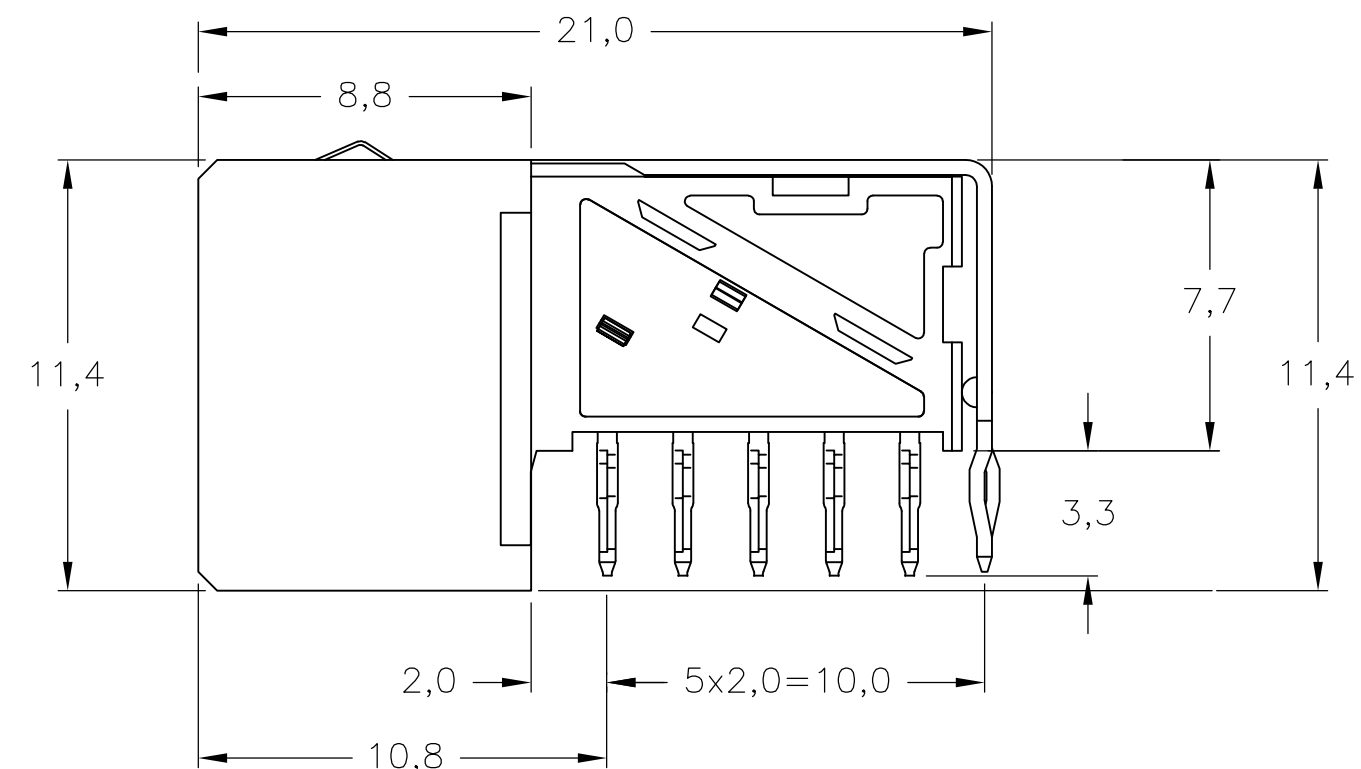

SHOWN
 LAY-OUT

19
 1
 2,0
 10
 f + + + + + + + + + +
 e + + + + + + + + + + + + + + + +
 d + + + + + + + + + + + + + + + +
 c + + + + + + + + + + + + + + + +
 b + + + + + + + + + + + + + + + +
 a + + + + + + + + + + + + + + + +
 EDGE OF P.C. BOARD
 18x 2,0 = 36,0
 4x 2,0 = 8,0
 9
 1,5
 0,05
 ALL HOLES

OBSOLETE	  		3-5352171-0
	  		5352171-9
	 		5352171-4
	 		5352171-1
	FINISH	MATERIAL	PARTNUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 21AUG2004		 TE Connectivity							
		CHK B.MOOIJ 27OCT2004									
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME Z-PACK 2mm HM TYPE B – 19 COLUMNS PRE-SHIELDED RECEPTACLE							
		APVD B.MOOIJ 27OCT2004									
		PRODUCT SPEC 108-19082									
		APPLICATION SPEC 114-19029									
MATERIAL -		FINISH -		SIZE A2		CAGE CODE 00779		DRAWING NO C-5352171		RESTRICTED TO -	
		WEIGHT 0.000000									
CUSTOMER DRAWING				SCALE 5:1		SHEET 1 OF 1		REV F			