
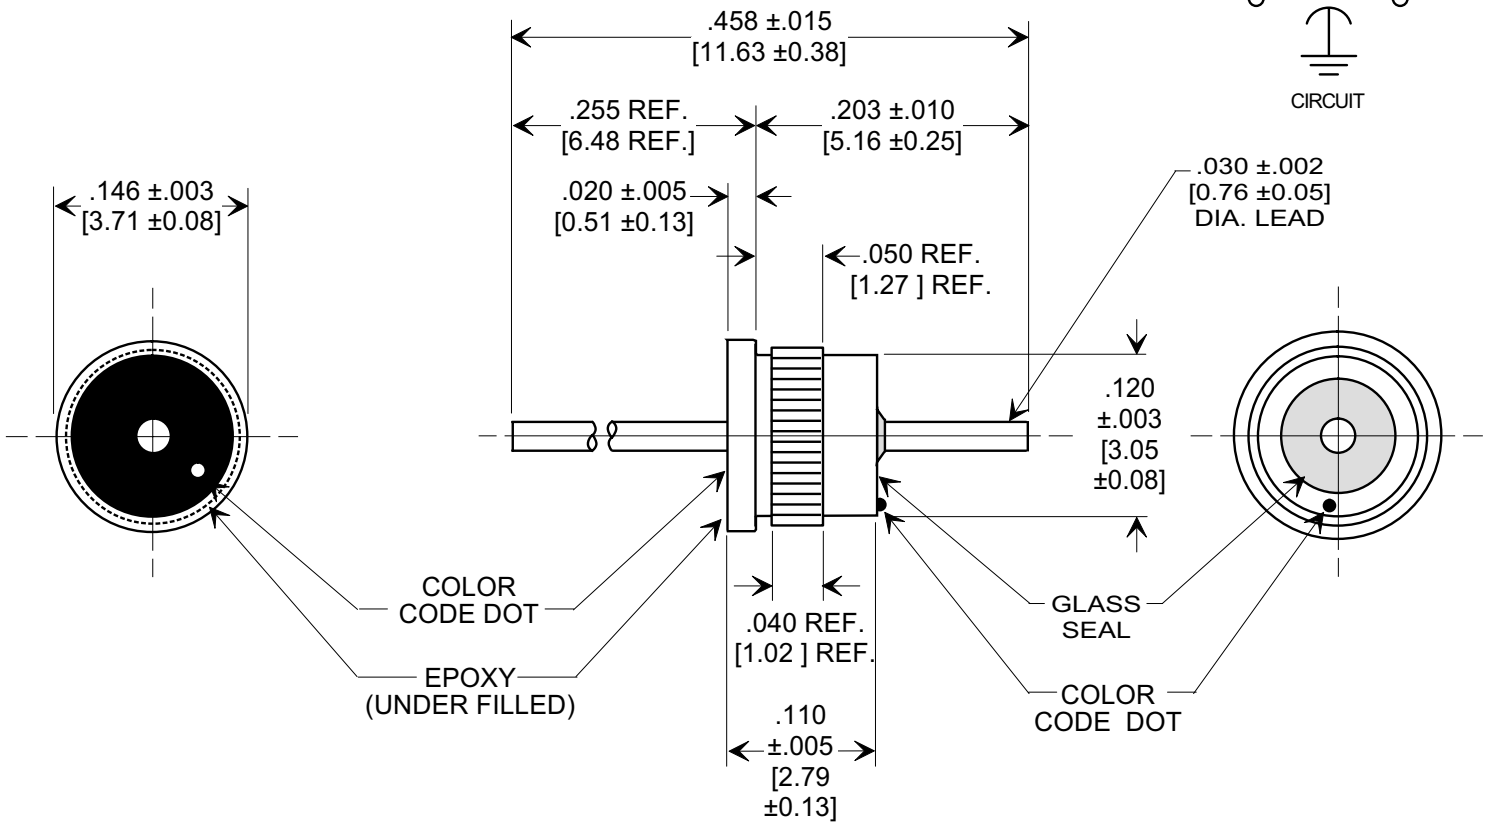



MARKETING SALES DRAWING
 DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
 DIMENSIONS IN METRIC - []

Electrical Testing
 per Tusonix standard
 test plans and Mil-Std-202
 Test Methods.



NOTES:

- OPERATING TEMPERATURE RANGE -55° C to +125° C.
- GOLD PLATED CASE AND LEAD.
- EPOXY SEALED ON OPPOSITE END FROM GLASS SEAL.
- PROPER INSTALLATION REQUIRES FIRM, STEADY PRESSURE UNTIL FLANGE IS FULLY SEATED
- RECOMMENDED MOUNTING HOLE: .128/.129 [3.25/3.28] DIA.
- TUSONIX STANDARD PART NUMBER: 4306-030.
 TUSONIX RoHS COMPLIANT PART NUMBER: 4306-030 LF.
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- RoHS COMPLIANT PART MARKED WITH DARK GREEN DOT FOR IDENTIFICATION.

Cx (pF)	TOL.	DC WORKING VOLTAGE		DC CURRENT (AMPS)	I.R. MIN.	D.W.V.	MIN. NO LOAD INSERTION LOSS (dB) @ 25° C PER MIL-STD-220					COLOR CODE
		85°C	125°C				1 MHz	10 MHz	100 MHz	1GHz	10 GHz	
2700	-0% +100%	150	100	5	10 G	250 VDC	---	10	25	40	50	RED

X-2015 Rev-0
REVISION RECORD
 Original Release
 C.O. 20050804-2-02

--TOLERANCES-- Unless Otherwise Specified		Title	
DECIMAL ± $\frac{\quad}{\quad}$		PRESS-IN EMI FILTER	
ANGLES ± $\frac{\quad}{\quad}$			
TUCSON, ARIZONA		Drawn S.M. 08-04-05	Scale 7 X
Approved B.Mc. 08-04-05		A 4306-030	