


This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.



**MARKETING SALES DRAWING**

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

ALL METAL PARTS SILVER PLATED

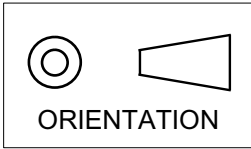


**Electrical Testing**  
per Tusonix standard  
test plans and Mil-Std-202  
Test Methods.

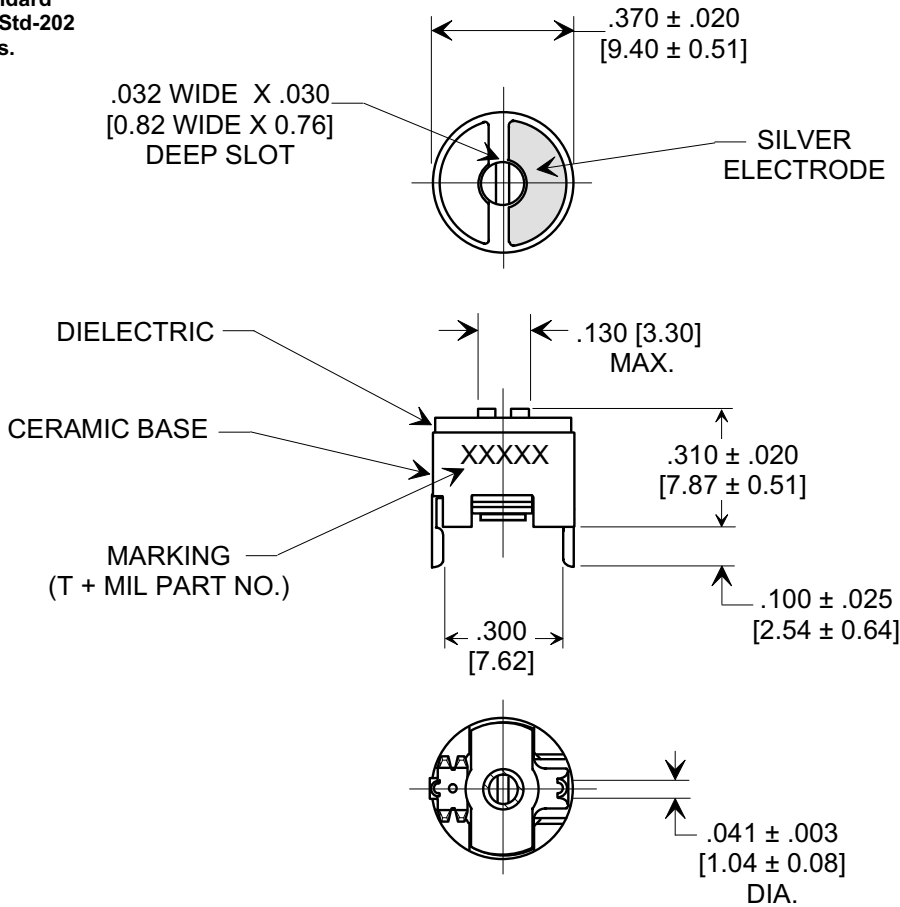

**SPECIFICATIONS**

TUSONIX STYLE.	538-054
Capacitance Range:	5.5 - 18 pF
Capacitance Tolerance:	MIN: +0% , MAX: -0, +50%
Temperature Characteristic:	DIELECTRIC CODE A
Working Voltage:	350 VDC AT + 85°C
Operating Temperature Range:	-55°C TO + 125°C
To MIL - C - 81/4E CV31A180	



X-2015 Rev-0

REVISION RECORD Original Release C.O. <b>19990615-6-01</b> TOL'S IN METRIC, CIRCUIT & ORIENTATION SYMBOL ADDED L.E. 05-04-07 <b>20070504-1-01</b> TUSONIX STYLE ADDED & MIL-C-81/4E WAS -81/4C L.E. 06-04-09 <b>ECO-785</b>	0	<b>TOLERANCES</b> unless otherwise specified 2 PLC. DECIMAL ± $\frac{\quad}{\quad}$ 3 PLC. DECIMAL ± .010 [0.25] ANGLES ± $\frac{\quad}{\quad}$	Title			
	1		<b>CERAMIC TRIMMER</b>			
	B		Drawn	S.M. 06-17-99	Scale	2 X
	<b>TUSONIX</b> TUCSON, ARIZONA		Approved	H.R. 06-17-99		
		<b>A</b>	<b>538-054 A 5.5 - 18</b>			