
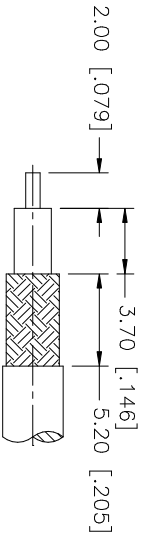

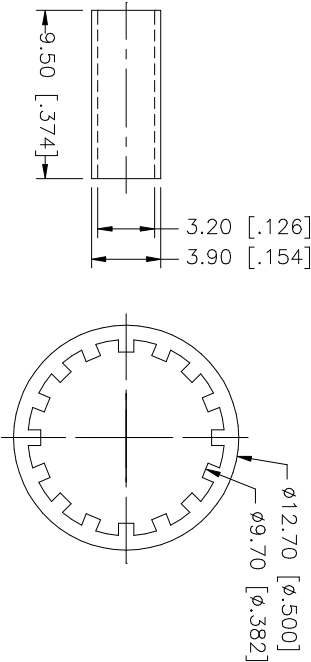

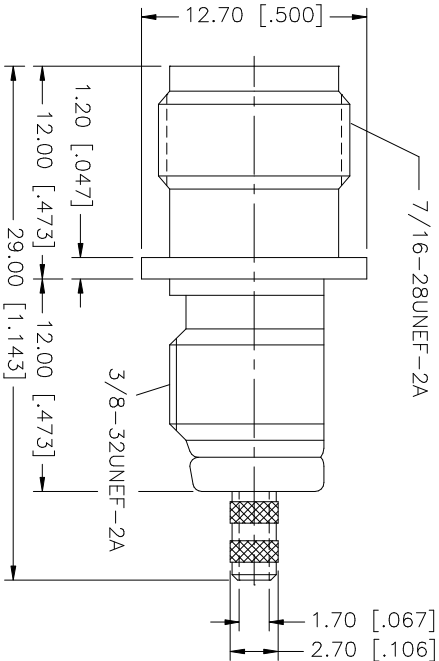


REV.	DATE	DESCRIPTION
NC	10/25/02	INITIAL RELEASE

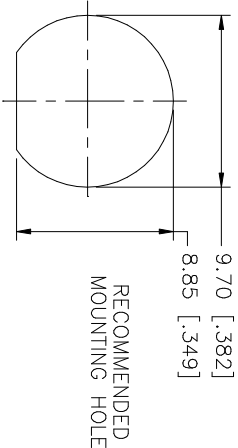

RECOMMENDED
CABLE STRIPPING DIM'S

- CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE .7mm
 3. MAX. PANEL THICKNESS = 7mm

9	HEX NUT	BRASS	NICKEL	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY			APPROVALS		DATE	Amphenol - Connex CONNECTOR CORPORATION TNC BULKHEAD CRIMP JACK (FOR RG-316/U, 174/U, 188A/U CABLE)						
8	LOCK WASHER	BRASS	NICKEL				DRAWN		G.R.S.						10/25/02	
7	FERRULE	COPPER	NICKEL				CHECKED									
6	CONTACT PIN	BRASS	GOLD				ISSUED									
5	BARREL	BRASS	NICKEL				UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"								TITLE	
4	LOCK RING	BRASS	NICKEL												SIZE	
3	CONTACT PIN	PHOS. BRONZE	GOLD	A		99001				122487.DWG	NC					
2	INSULATOR	TEFLON	NATURAL													
1	BODY	BRASS	NICKEL													
DESCRIPTION		MATERIAL	FINISH	DO NOT SCALE DRAWING				SCALE	NA	PART NO.	122487	SHEET	1 OF 1			