


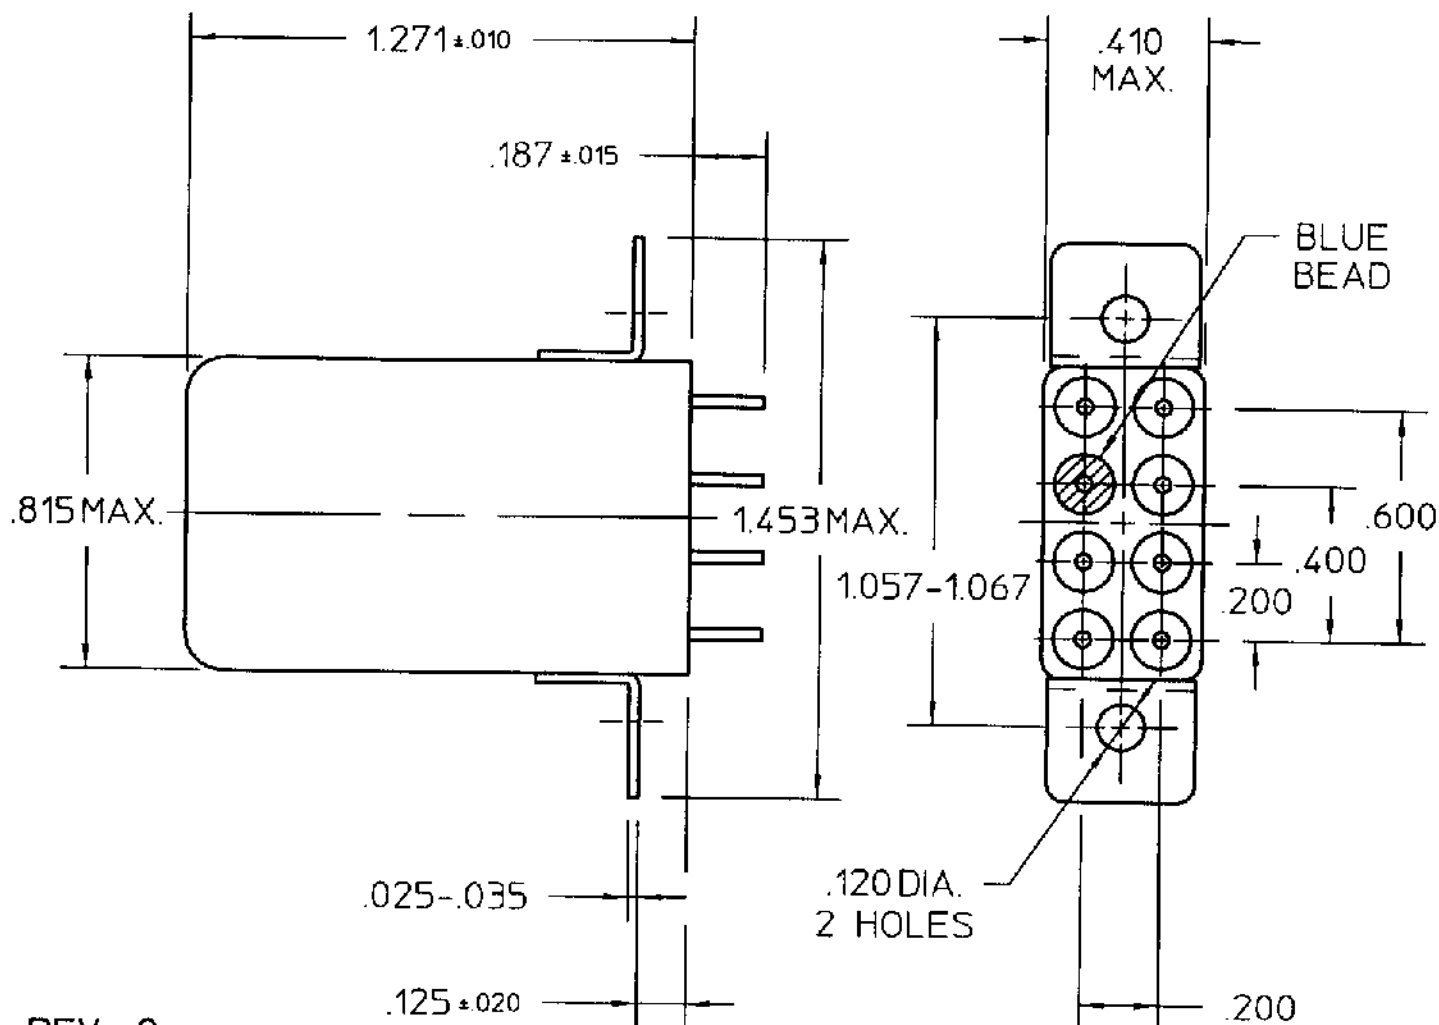

REV. 0

DCO 170339

COIL: @ 25°C
 RESISTANCE _____ 5000 OHMS
 NOMINAL VOLTAGE _____ 6.0 mADC
 MUST OPERATE _____ 2.8 mADC

MUST RELEASE _____ 1.4 mADC MAX, 0.3 mADC MIN

ENVIRONMENT:

VIBRATION _____ 10 CPS TO _____ 2000 CPS @ _____ 15 g's

SHOCK _____ 100 g's _____ 6 MS. DURATION


TEMPERATURE _____ -65 °C TO _____ +125 °C

NOTES: _____ OPERATE 15 MS MAX

_____ RELEASE 10 MS MAX

_____ CONTACT BOUNCE 2 MS MAX

CUSTOMER DATA SHEET

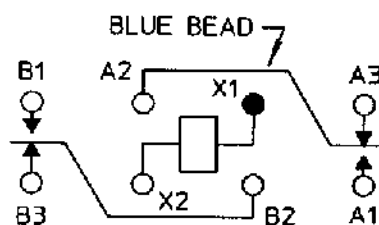

TERMINAL VIEW

CONTACT RATING: LOW LEVEL TO 2A
 28 VDC RESISTIVE 100,000 OPERATIONS

DR. PBB 12/6/00

CK. TLG 12-11 -00

CI Technologies
 advanced control electronic solutions

CUST. _____ QPL

CUST. NO. _____ M5757/13-101

REV. _____

3SAT RELAY

3SAT1318A2