




TOP VIEW



SIDE VIEW

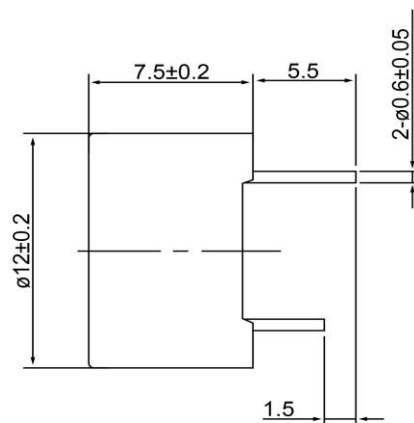

BOTTOM VIEW

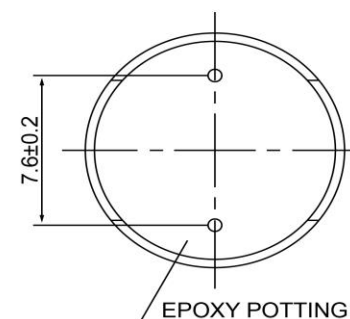

Specifications			Notes	Revision History						
Description	Value	Unit		Version	Description		Date		Approved	
Technology	Electro-Mechanical		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering		10/21/2013		J.S	
Resonant Frequency	3,100	(Hz)								
Rated Voltage	12	(V)								
SPL @ 10cm	85	(dBA)								
Tone	Single									
Mount Type	Thru Hole									
Voltage Range	9 ~ 15	(V)								
Max Rated Current	30	(mA)								
Housing Material	NORYL									
Operating Temperature	-30 ~ +70	°C								
Storage Temperature	-40 ~ +85	°C		Drawn by	Date	Checked by	Date	Approved by	Date	
Weight	2	(g)		A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013	
DB UNLIMITED			Electro-Mechanical Indicator			IE123112-1				