


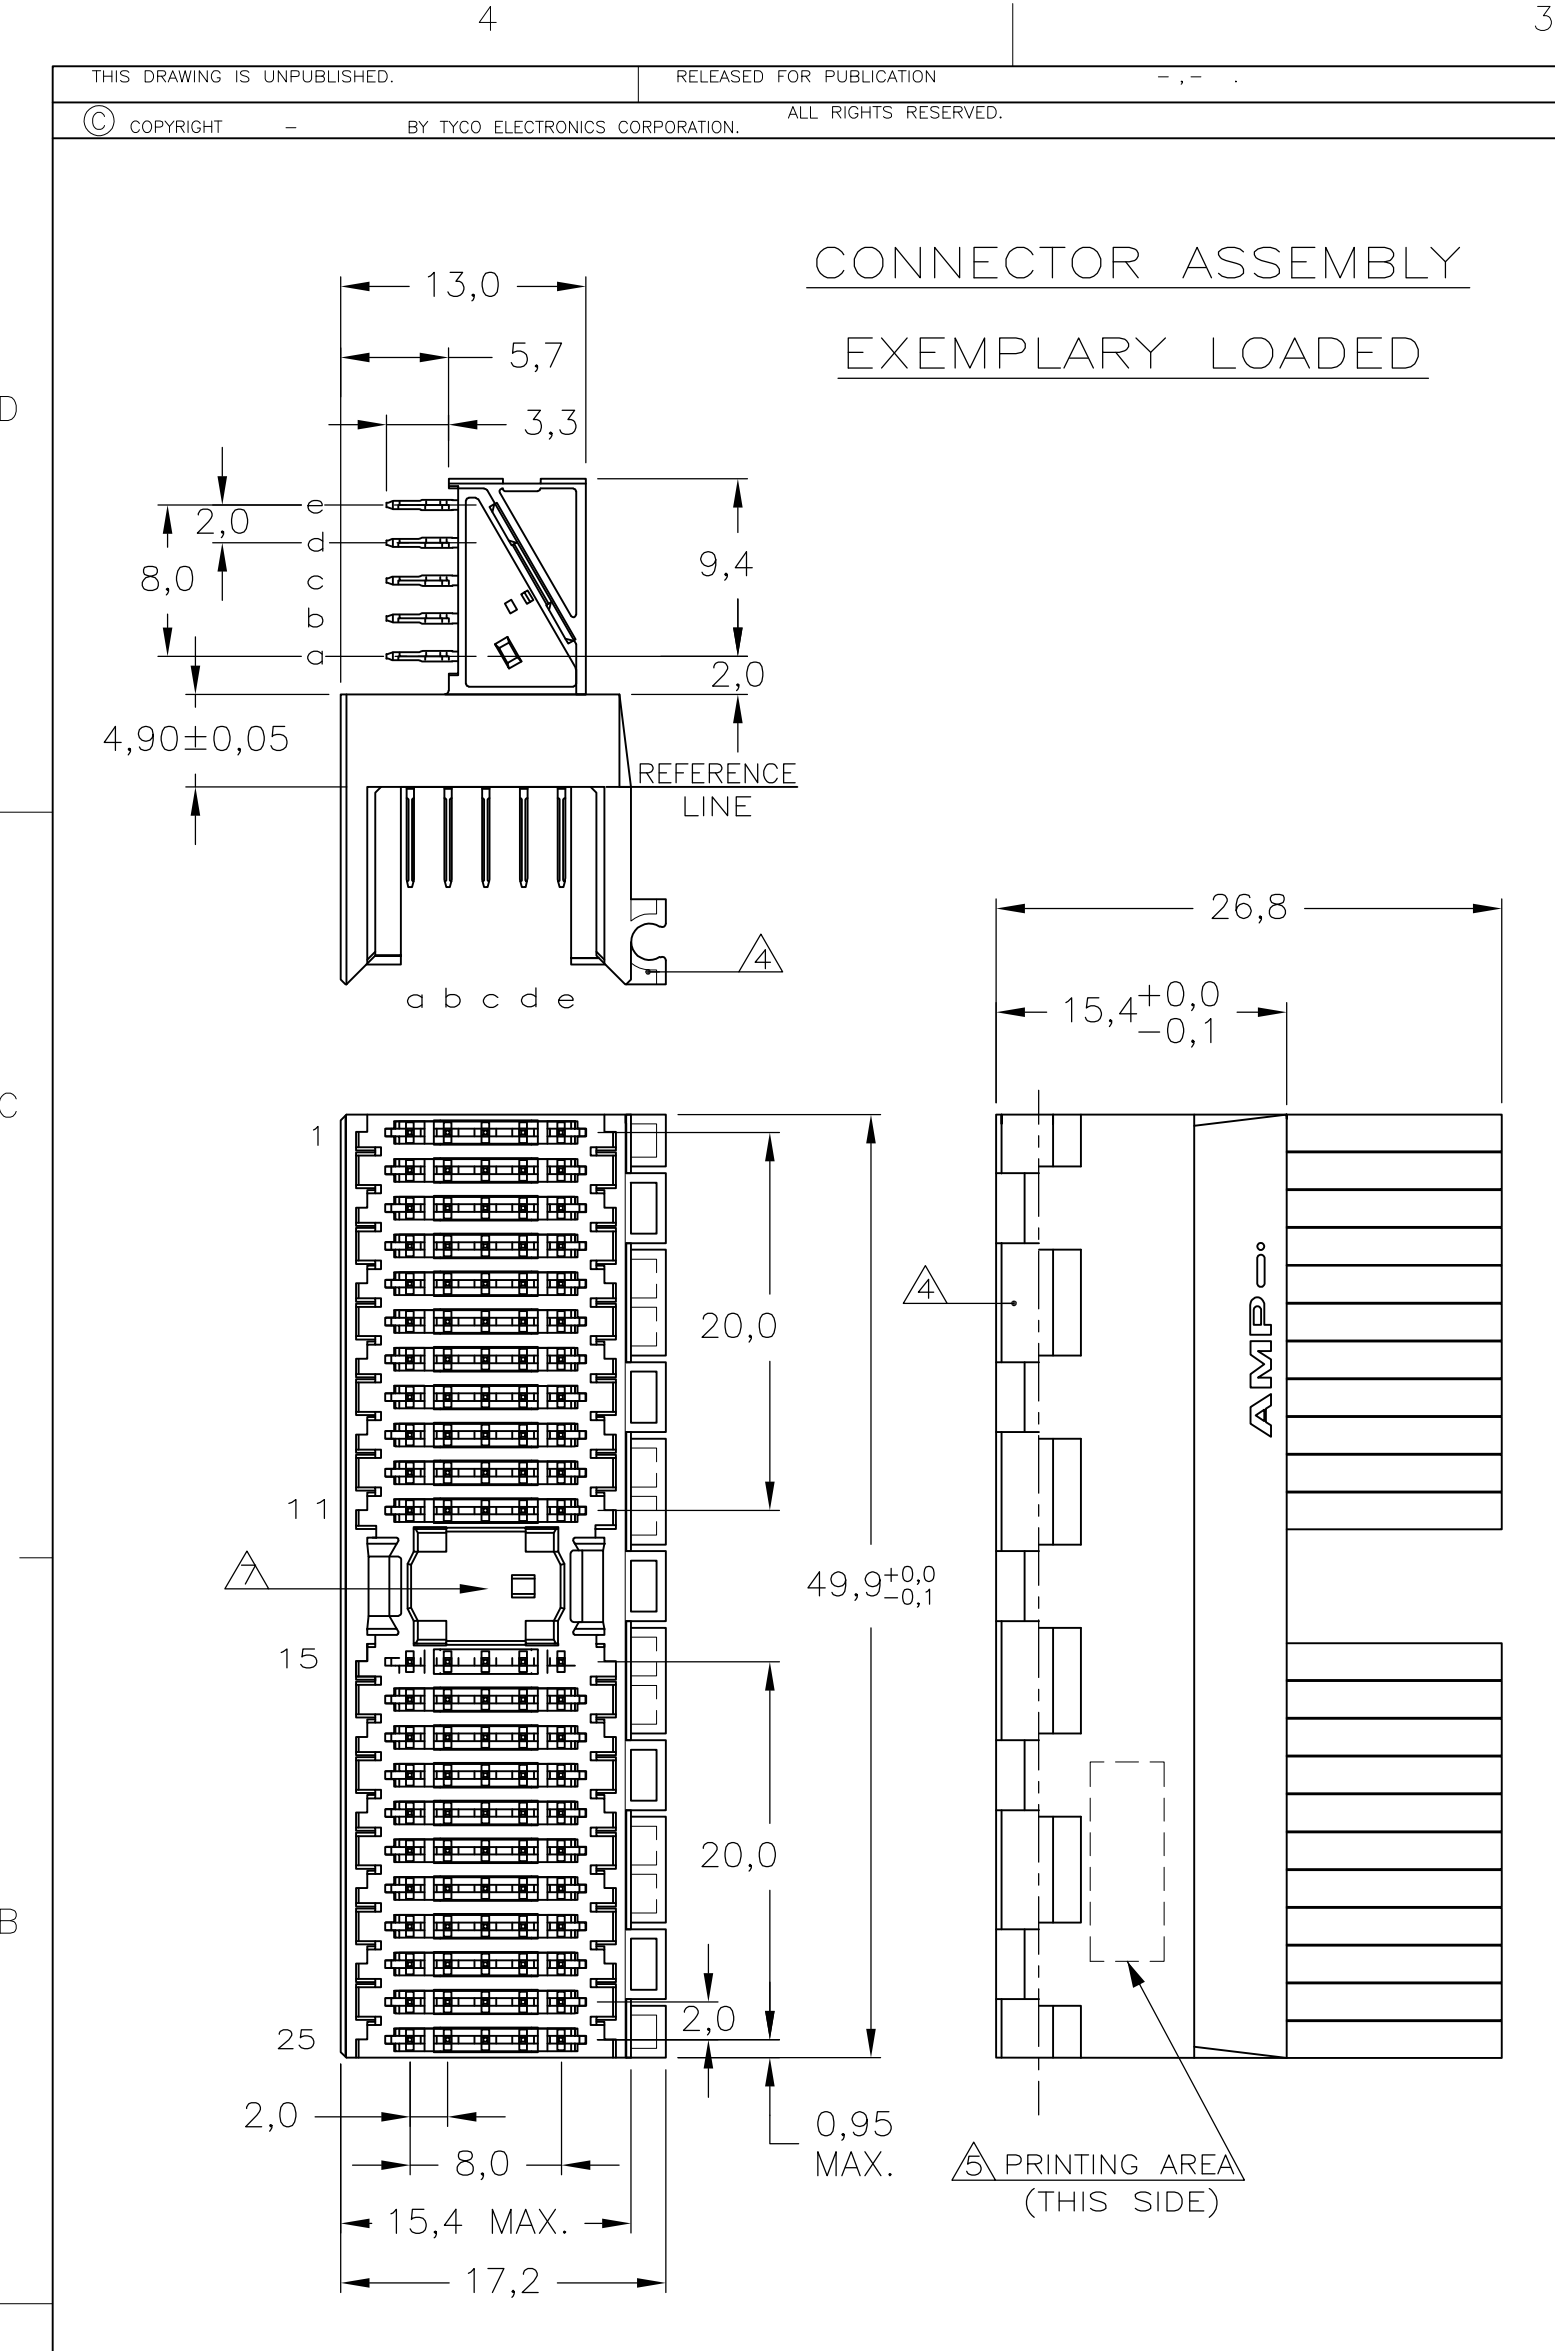

NOTES:

1 MATERIAL HOUSING : GREY GLASSFILLED POLYESTER
UL-RATING VØ

CONTACT : PHOSPHORBRONZE

2 GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT):
1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN MIN.
FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION
REFERENCE FOR EACH DASH NUMBER.



3 CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101
PERFORMANCE LEVEL 2.

4 CONNECTOR ASSEMBLY WITH LATCH HINGE FOR CABLE CONNECTOR.

5 CONNECTOR PRINTED WITH PARTNUMBER AND DATECODE

6 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.

7 AREA FOR KEYING PART (BASIC PART NUMBER 100525).

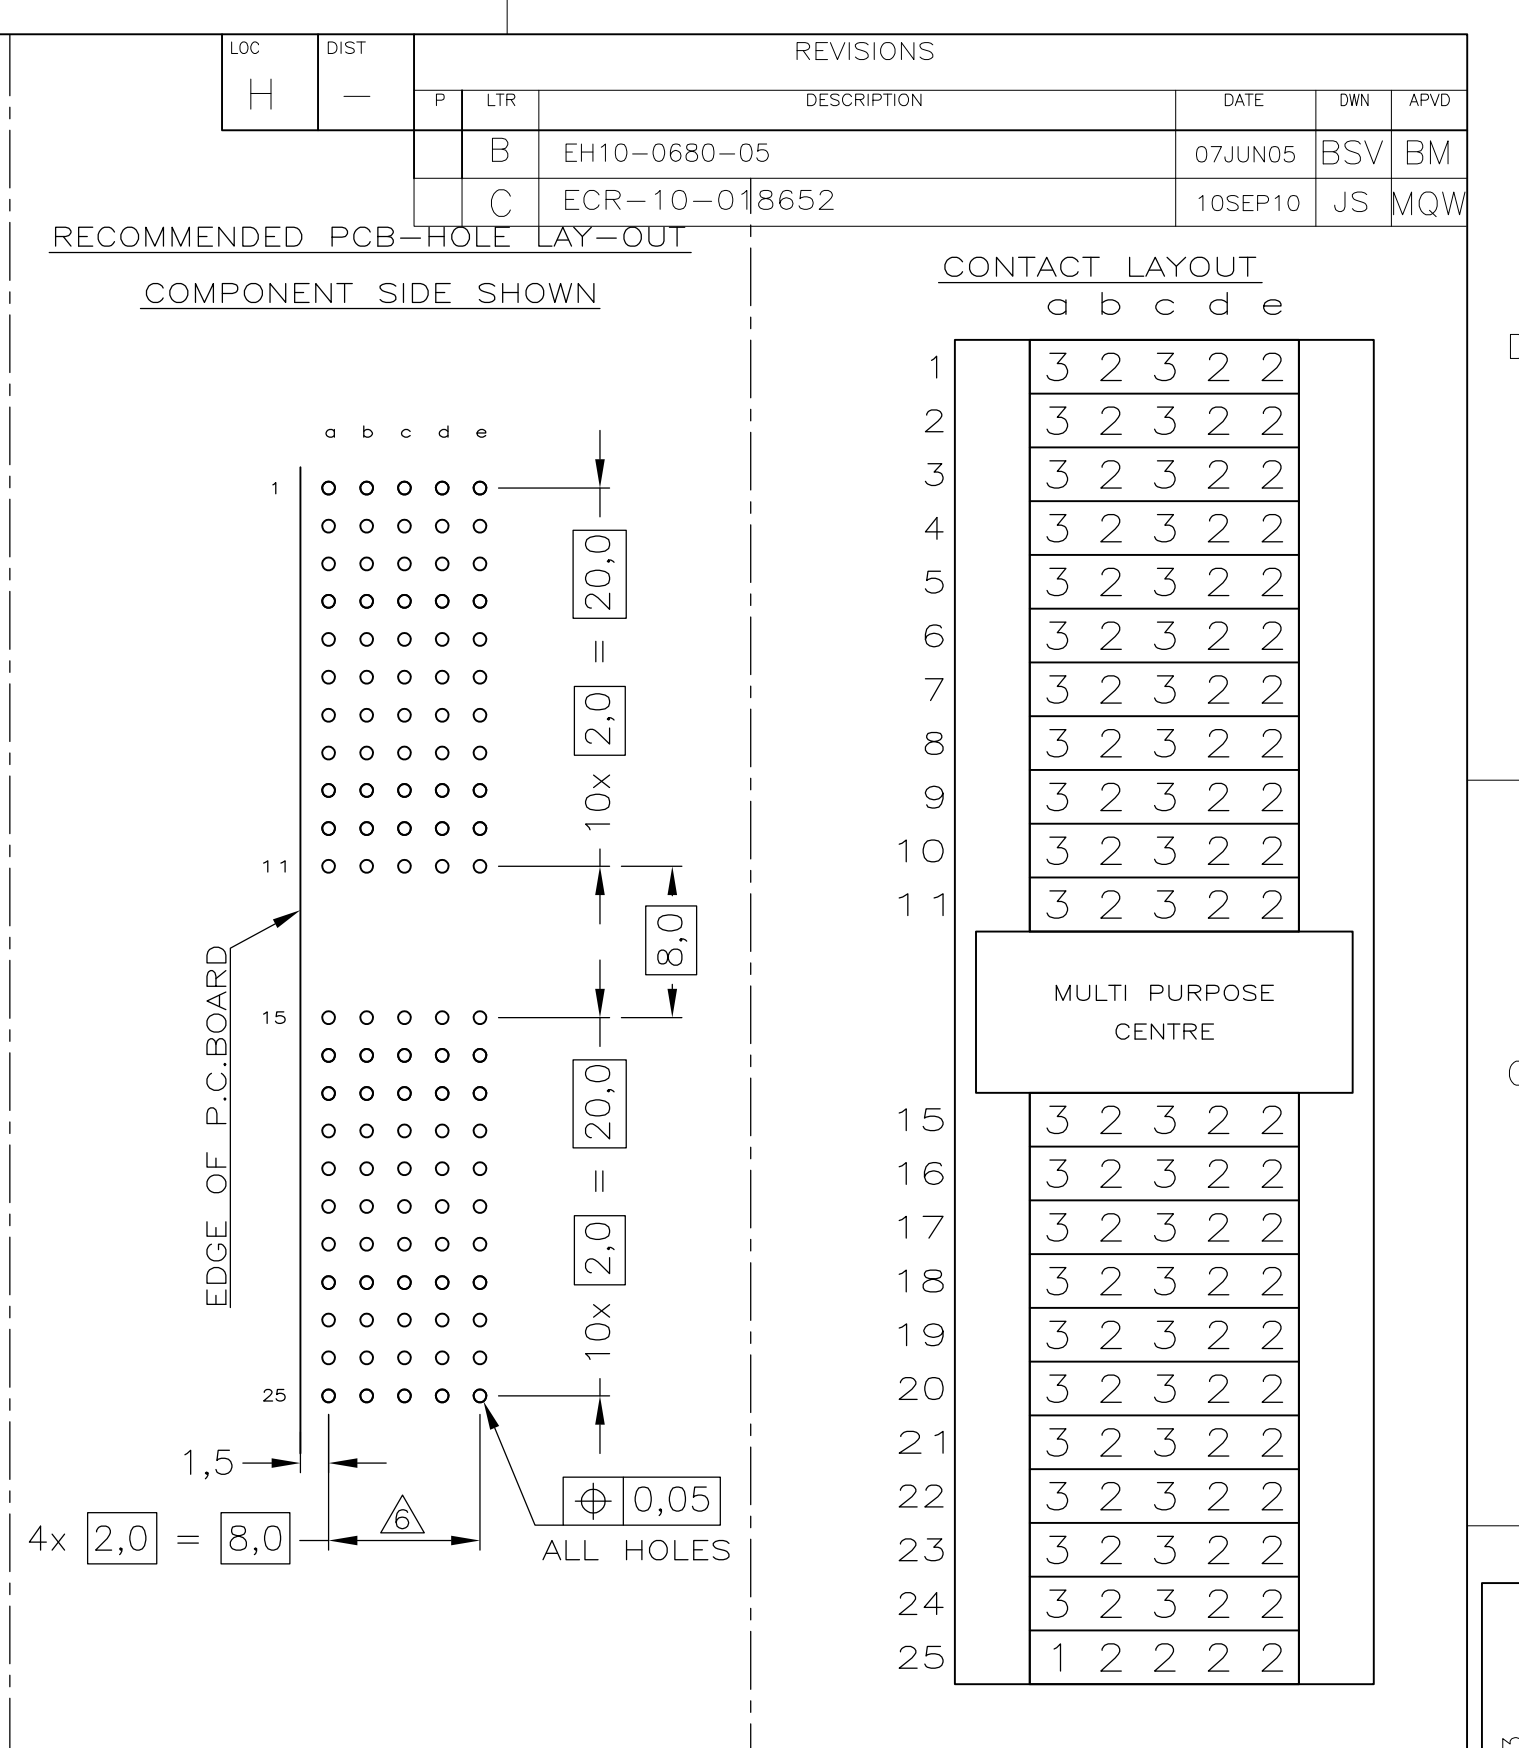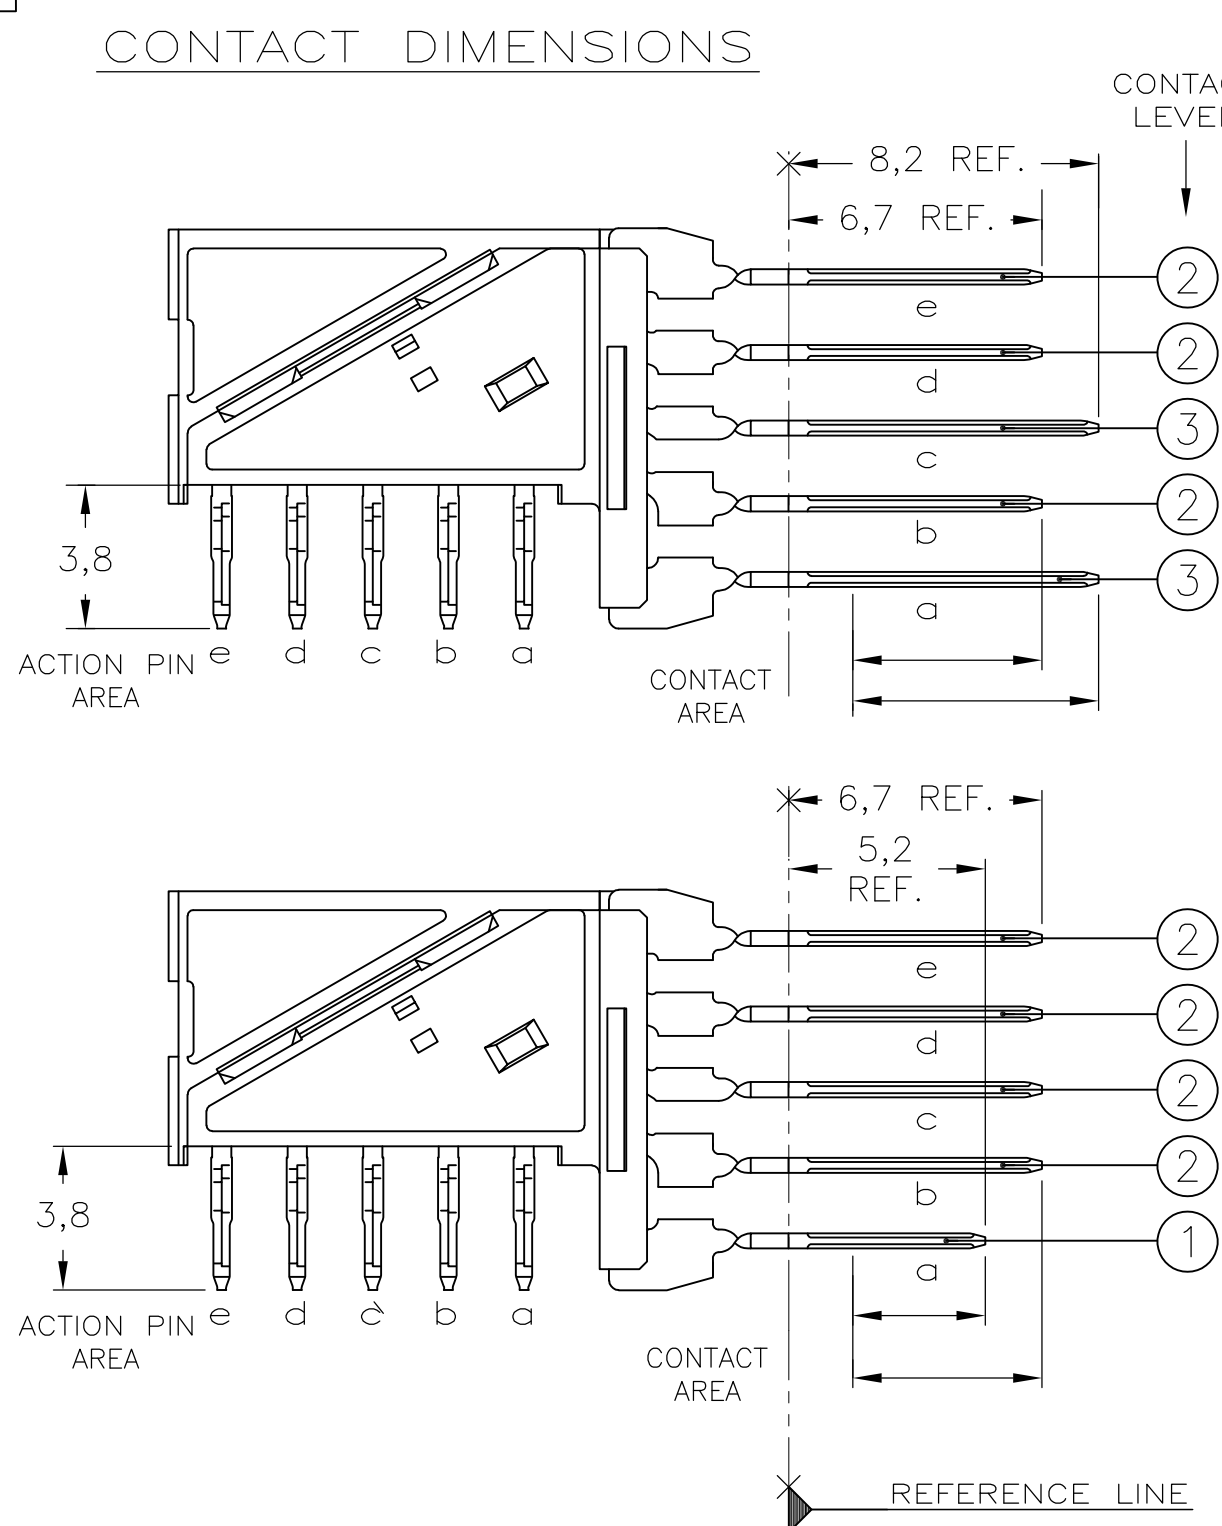

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K.N.KIRAN 21AUG2004	Tyco Electronics Corporation 's-Hertogenbosch,5222AR-32	
DIMENSIONS: mm		CHK B.MOOIJ 23DEC2004	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLG ± 1 PLG ± 2 PLG ± 3 PLG ± 4 PLG ± ANGLES ± FINISH		APVD B.MOOIJ 23DEC2004	PRODUCT SPEC 108-19082 APPLICATION SPEC 114-19029 WEIGHT -	
MATERIAL -		CUSTOMER DRAWING	SIZE A2	CAGE CODE 00779
		SCALE 5:1	DRAWING NO C=5352233	RESTRICTED TO -
		SHEET 1	OF 1	REV C