



REV.	DATE	DESCRIPTION
NC	09/28/98	INITIAL RELEASE
A	02/19/07	UPDATE DRAWING FORMAT

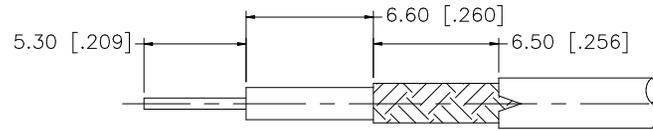

RECOMMENDED CABLE STRIPPING DIMENSIONS

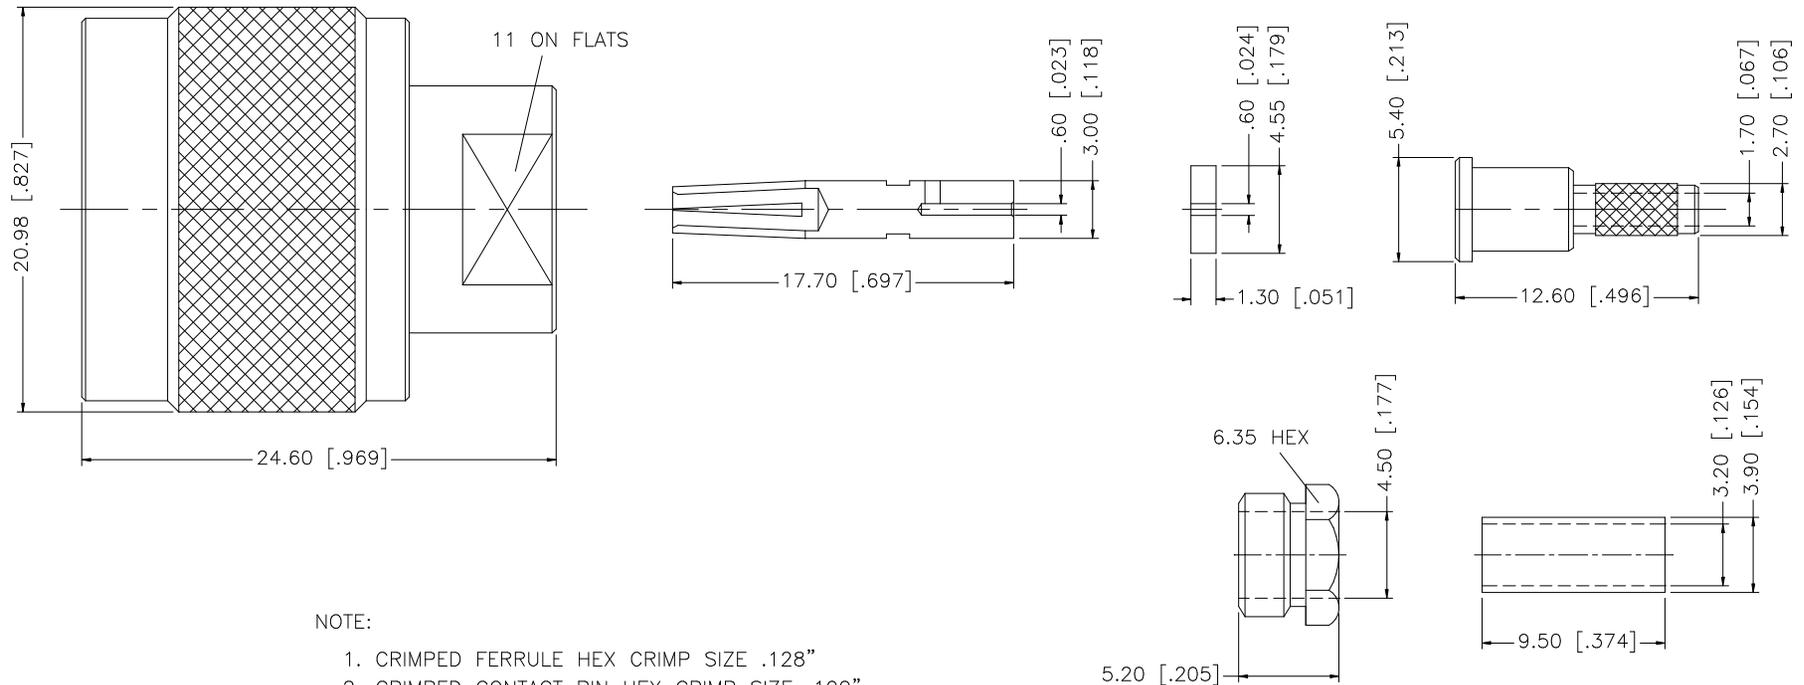

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100"

QTY	DESCRIPTION	MATERIAL	FINISH	QTY	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [ ] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex							
8								<b>N CRIMP PLUG – REVERSE POLARITY (FOR RG-174/U, 188A/U, 316/U)</b>							
7	FERRULE	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	DRAWN	G.R.S.				02/19/07				
6	HEX NUT	BRASS	NEXCOTE	1		CHECKED									
5	LOCK WASHER	BRASS	NEXCOTE	1		ISSUED									
4	INSULATOR	TEFLON	NATURAL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 ± 0.007" .315 – 1.180 ± 0.015" 1.180 – 4.724 ± 0.020"	SHEET	1 OF 1								
3	CONTACT PIN	PHOS. BRONZE	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1				PART NO.	172128RP						
1	BODY	BRASS	NEXCOTE	1				DWG. NO.	172128RP.DWG	REV.	A	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING			CAD FILE	C:/172/172128RP.DWG						