
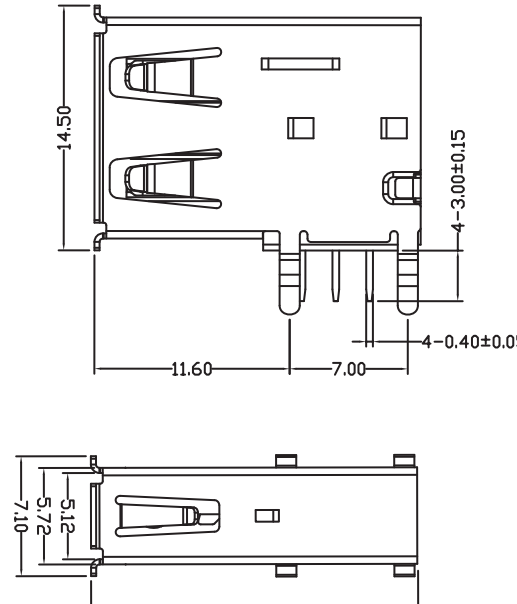


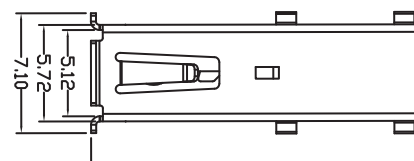
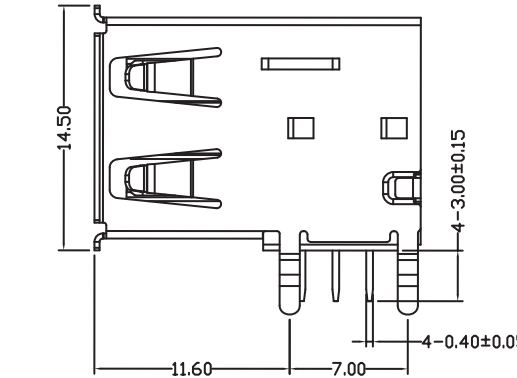


1	2	3	4	5
			TECHNICAL CHARACTERISTICS MATERIAL INSULATOR: PBT FLAMMABILITY RATING: UL94-V0 COLOR: BLACK CONTACT MATERIAL: COPPER ALLOY CONTACT TYPE: STAMPED CONTACT PLATING: SELECTIVE GOLD SHIELDING: BRASS Ni PLATED QUALITY CLASS: 1500 MATING CYCLES	
			ENVIRONMENTAL OPERATING TEMPERATURE: -40°C UP TO +105°C COMPLIANCE: LEAD FREE AND ROHS	
 PCB LAYOUT - COMPONENT VIEW			ELECTRICAL CURRENT RATING: 1.5 A MAX WORKING VOLTAGE: 30 V INSULATOR RESISTANCE: >1000 MΩ DIELECTRIC WITHSTANDING VOLTAGE: 750 VAC/MIN CONTACT RESISTANCE: 20 mΩ MAX	
			SOLDERING JEDEC LEAD FREE WAVE SOLDERING	
			PACKAGING TRAY	

RoHS Compliant				PROJECTION: 	GENERAL TOLERANCE .X = $\pm$ 0.2 .XX = $\pm$ 0.15	 WÜRTH ELEKTRONIK	
				APPROVAL: NPr	UNIT: MM	DESCRIPTION: USB 2.0 TYPE A UP RIGHT	SIZE A4
B	27-OCT-14	REVIEW	QL		SCALE:		
A	02-01-14	DRAWING	QP		SHEET: 1/1	WERI PART NO: 614 004 134 726 1	
REV	DATE	FILE	BY		DRAW: QL		

