

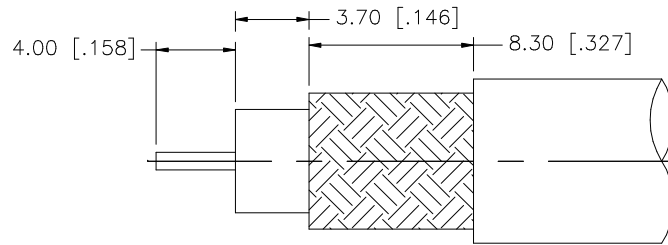
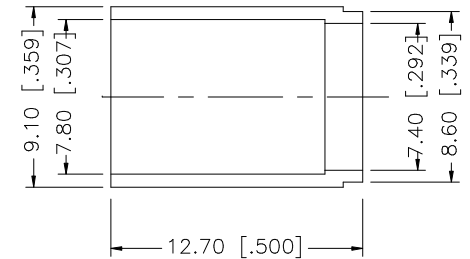


REV.	DATE	DESCRIPTION
A	03/18/05	UPDATE DRAWING FORMAT

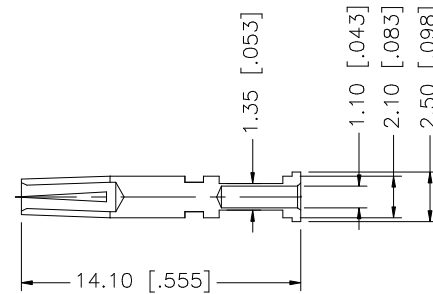

RECOMMENDED
CABLE STRIPPING DIM'S

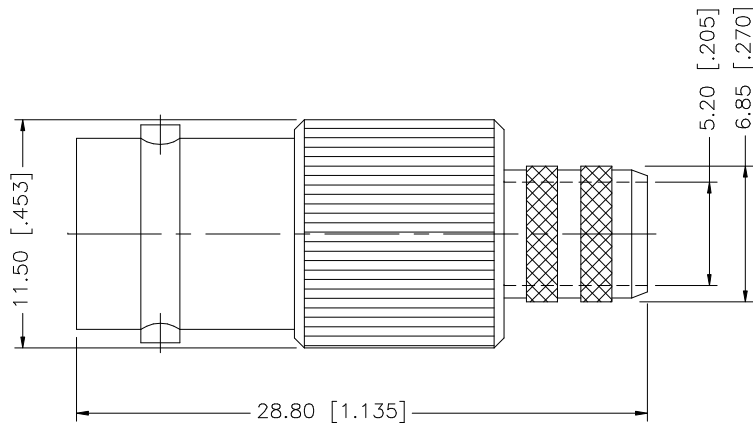

NOTE:

USE .320 HEX DIE SET
FOR OUTER CRIMP.
CONNEX P/N 47-10100
IDEAL P/N 30-503

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
8						DRAWN	G.R.S.	03/18/05						
7						CHECKED								
6										PART DESCRIPTION				
5	FERRULE	COPPER	NICKEL	1						BNC CRIMP JACK (FOR RG–6 BELDEN 1694A CABLE)				
4	CONTACT PIN	PHOS. BRONZE	GOLD	1						PART NO.				
3	INSULATOR	TEFLON	NATURAL	1						112965				
2	BODY	BRASS	NICKEL	1						DWG. NO.				
1	HOUSING	BRASS	NICKEL	1					112965.DWG					
DESCRIPTION					MATERIAL	FINISH	QTY	CAD FILE		REV.	SIZE	SCALE		
								C:/112/112965.DWG		A	A	NA		