

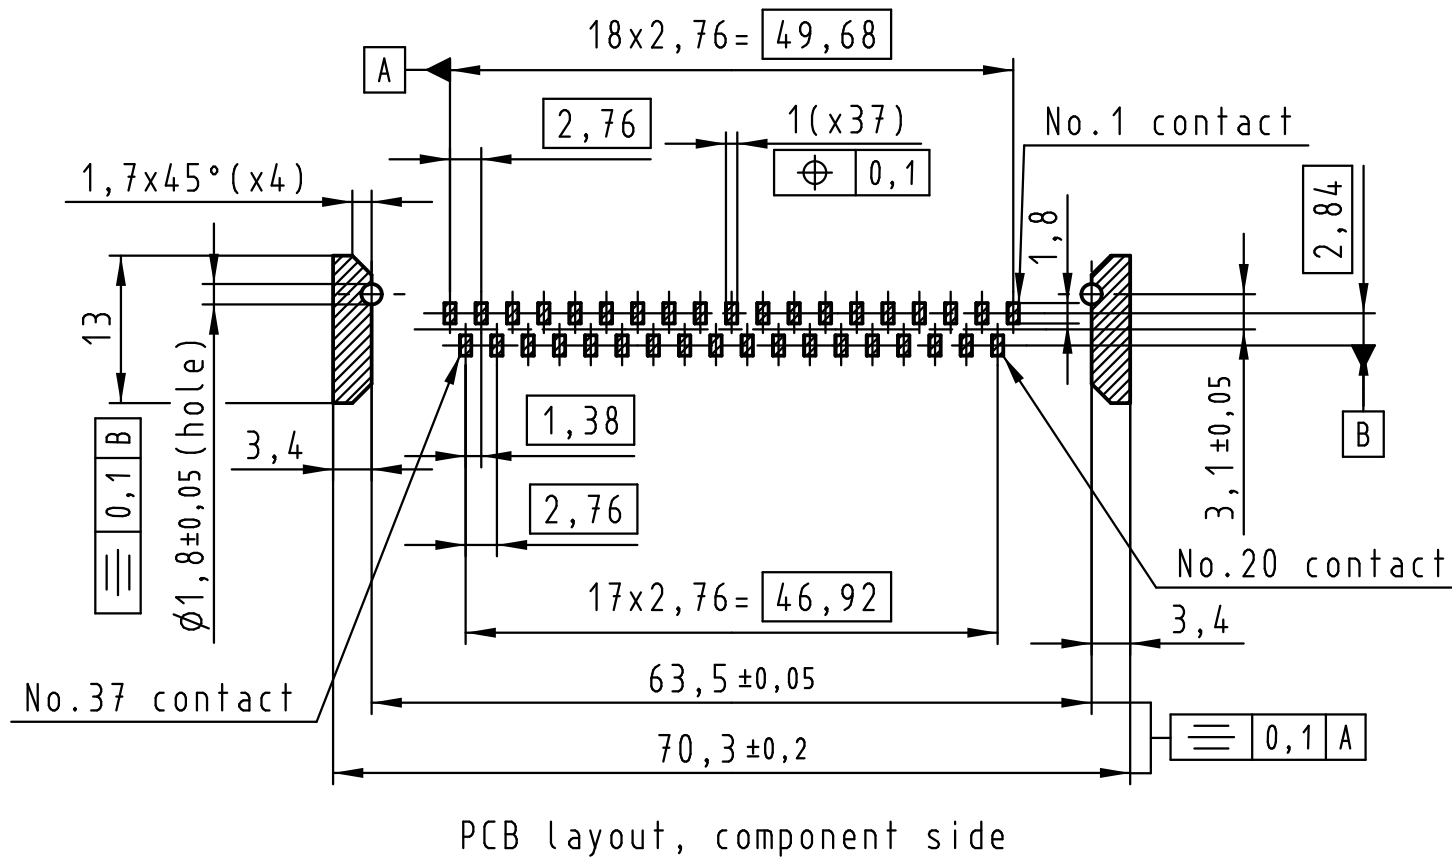
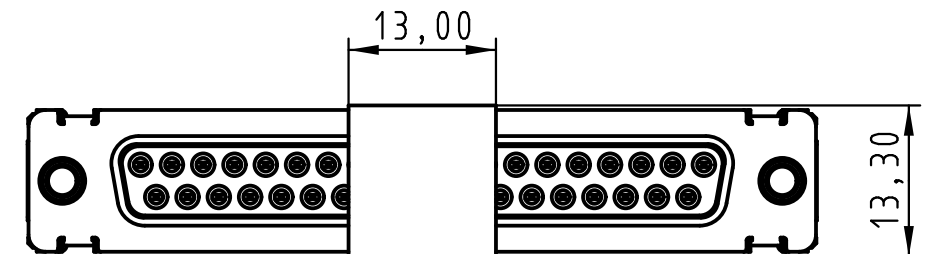
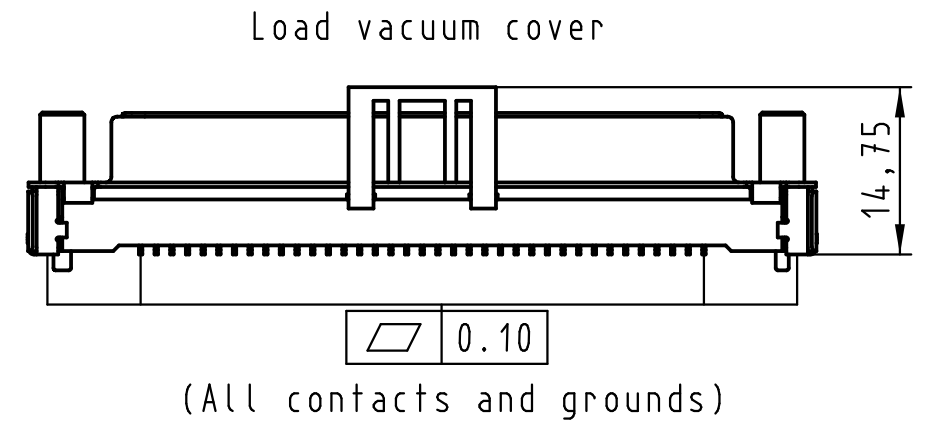

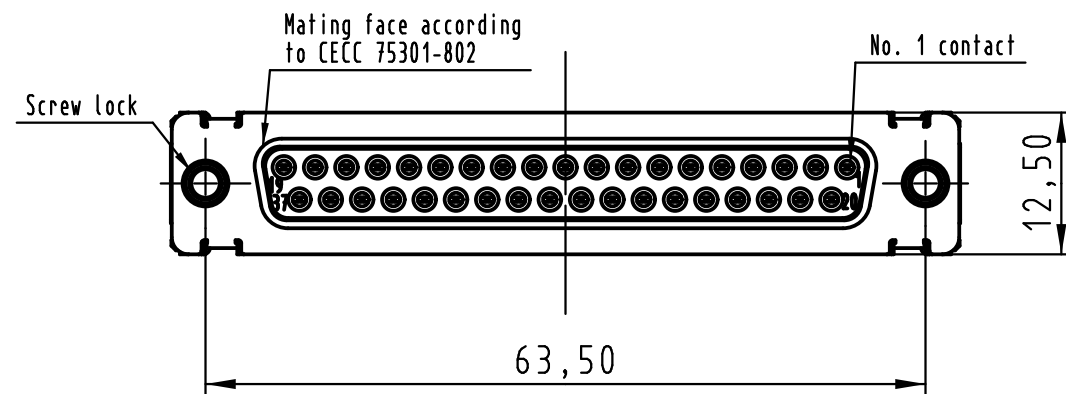


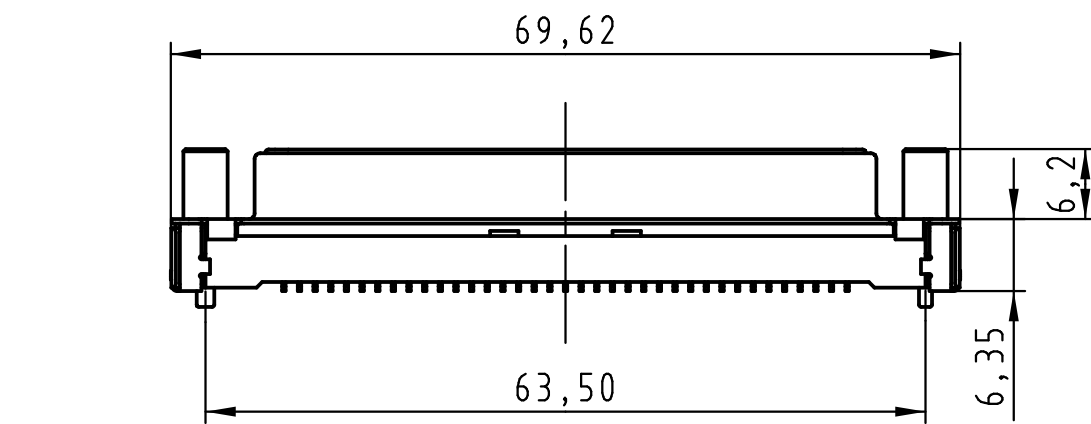



Max. Temperature: 260° during 10 seconds.

0955 415 3621 741	1	M3	Black insulator	Reel Packaging: 140 connectors (See details on page2/2)
0955 415 3622 741	1	4-40 UNC		
0955 415 6621 741	2	M3		
0955 415 6622 741	2	4-40 UNC		
0955 415 7621 741	3	M3		
0955 415 7622 741	3	4-40 UNC		
Part number	PL	Screw lock	Index designation	


			All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances		
				Dat.	Name	Scale 1.5:1	D-Sub SMT, 37 poles Female, Straight with screw locks and ground pads				
			Detail.	25-Oct-11	Johnson.S						
			Insp.	17-Nov-11	Steven.W						
			Stand.	17-Nov-11	Steven.W						
			Zhuhai HARTING Limited						TB 09 55 415 x62x		
EC04070	17-Nov-11	Johnson.S							Sub.		
Mod.	Dat.	Name							Page 1 / 2		

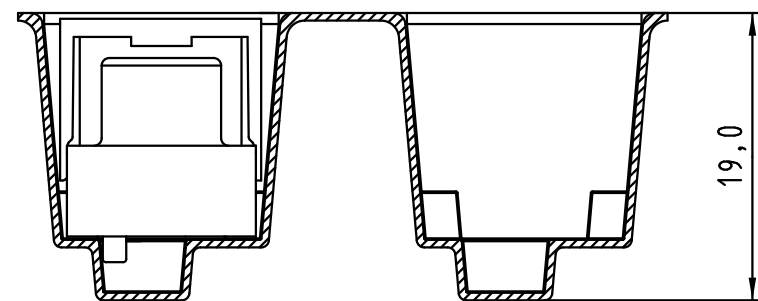

Detail A

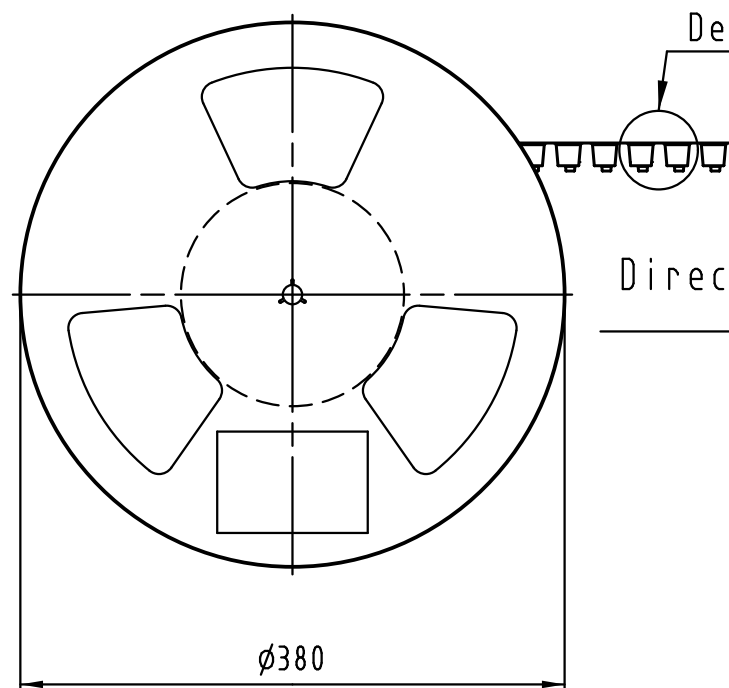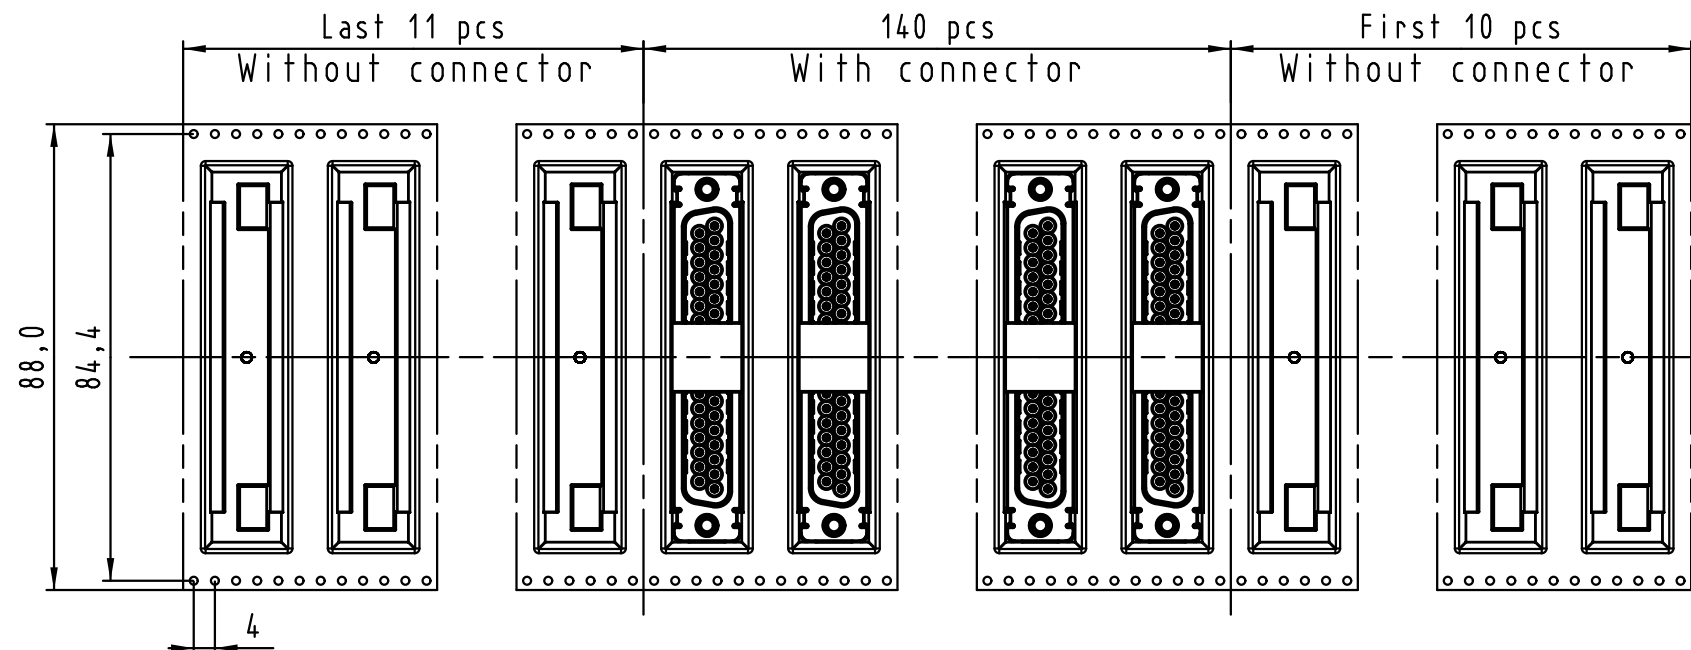

Direction of unreeling →

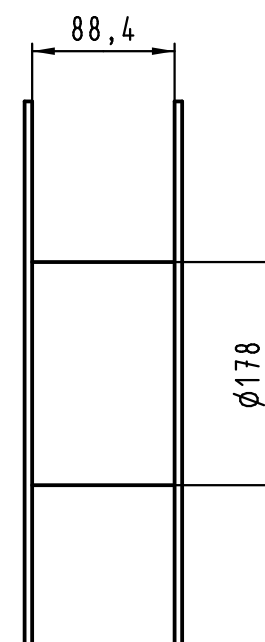

See TB 09 55 415 x62x folio 1/2
for connector dimensions
and PCB layout

Packaging in accordance with
EIA 481-2.

0955 415 3621 741	1	M3	Black insulator	Reel Packaging: 140 connectors
0955 415 3622 741	1	4-40 UNC		
0955 415 6621 741	2	M3		
0955 415 6622 741	2	4-40 UNC		
0955 415 7621 741	3	M3		
0955 415 7622 741	3	4-40 UNC	Index designation	
Part number	PL	Screw lock		

			All Dimensions in mm Original Size DIN A 3			Techn. Character.			Free size tolerances		
				Dat.	Name	Scale	D-Sub SMT, 37 poles Female, Straight with screw locks and ground pads				
			Detail.	25-Oct-11	Johnson.S						
			Insp.	17-Nov-11	Steven.W						
			Stand.	17-Nov-11	Steven.W						
							TB 09 55 415 x62x			Page 2 / 2	
EC04070	17-Nov-11	Johnson.S	Zhuhai HARTING Limited				Sub.				
Mod.	Dat.	Name									