
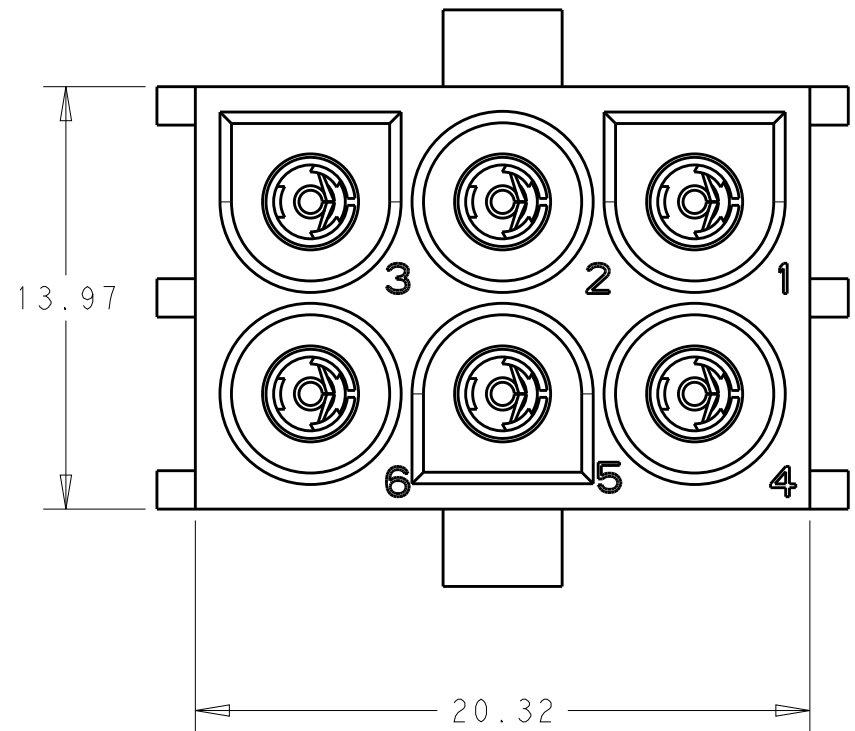
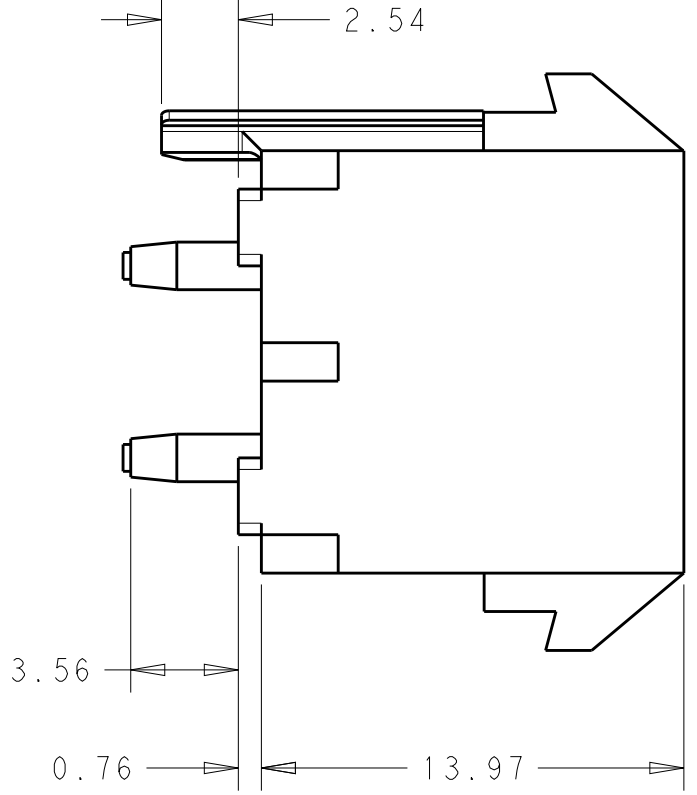


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	REVISED PER ECR-17-014561	10OCT2017	RK	JL
	A1	REVISED PER ECR-17-015644	25OCT2017	RK	JL

D

D

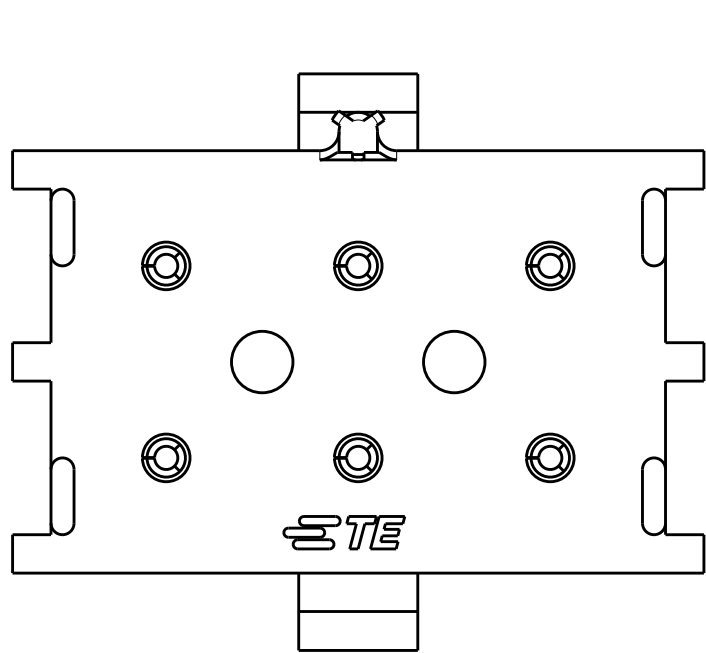


NOTES:


1. PARTS COMPLY TO TE SOLDERABILITY SPEC 109-11-3.

2. MATERIALS:

- HOUSING:GF-LCP
COLOR:SEE TABLE
- CONTACT:PHOSPHOR BRONZE
PLATING:TIN

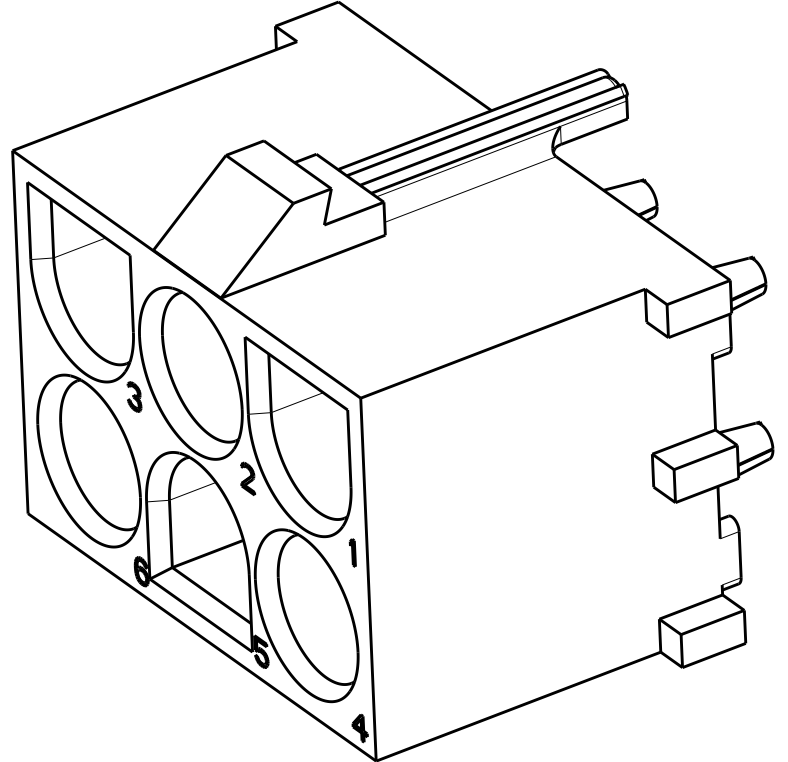

SCALE 4:1

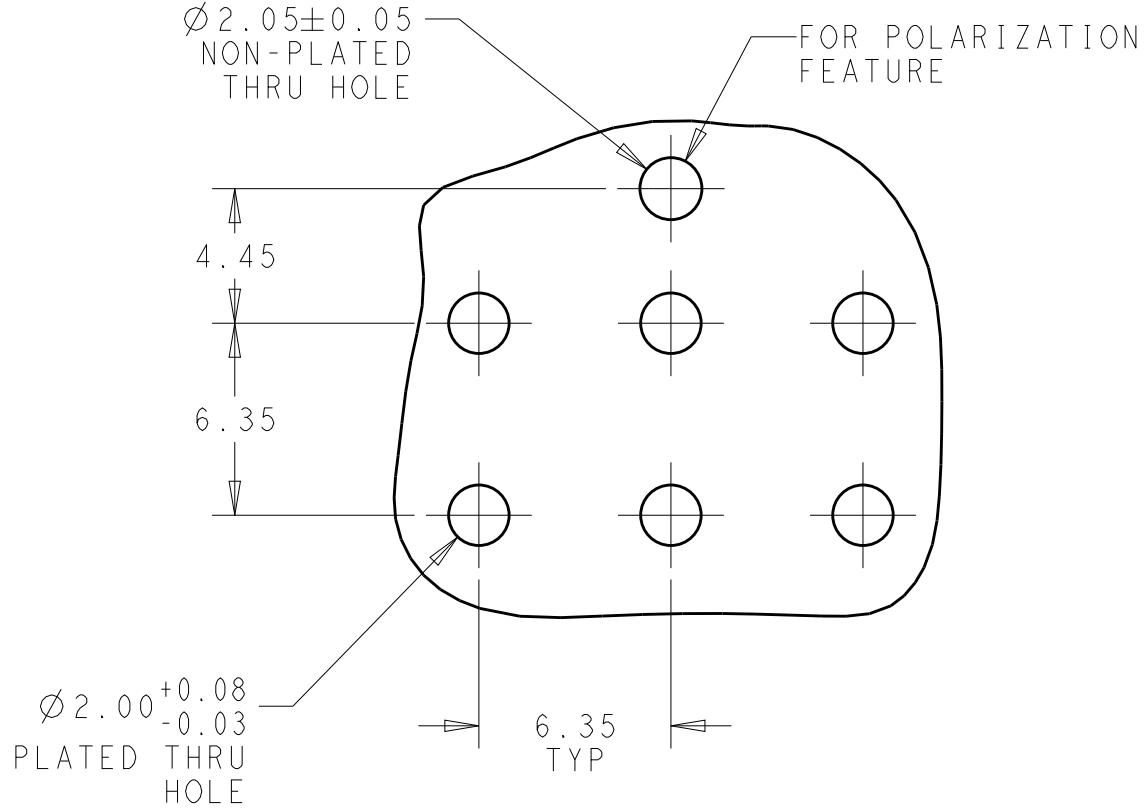

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK PC BOARD
SCALE 4:1

2213756-1, 1-2213756-1
SHOWN

BLACK	15 POS UMNL HEADER HOUSING POLARIZED	1-2213756-4
BLACK	12 POS UMNL HEADER HOUSING POLARIZED	1-2213756-3
BLACK	9 POS UMNL HEADER HOUSING POLARIZED	1-2213756-2
BLACK	6 POS UMNL HEADER HOUSING POLARIZED	1-2213756-1
NATURAL	15 POS UMNL HEADER HOUSING POLARIZED	2213756-4
NATURAL	12 POS UMNL HEADER HOUSING POLARIZED	2213756-3
NATURAL	9 POS UMNL HEADER HOUSING POLARIZED	2213756-2
NATURAL	6 POS UMNL HEADER HOUSING POLARIZED	2213756-1
COLOR	POSITION	PART NO.




1471-9 (3/13)

D


D

C

C

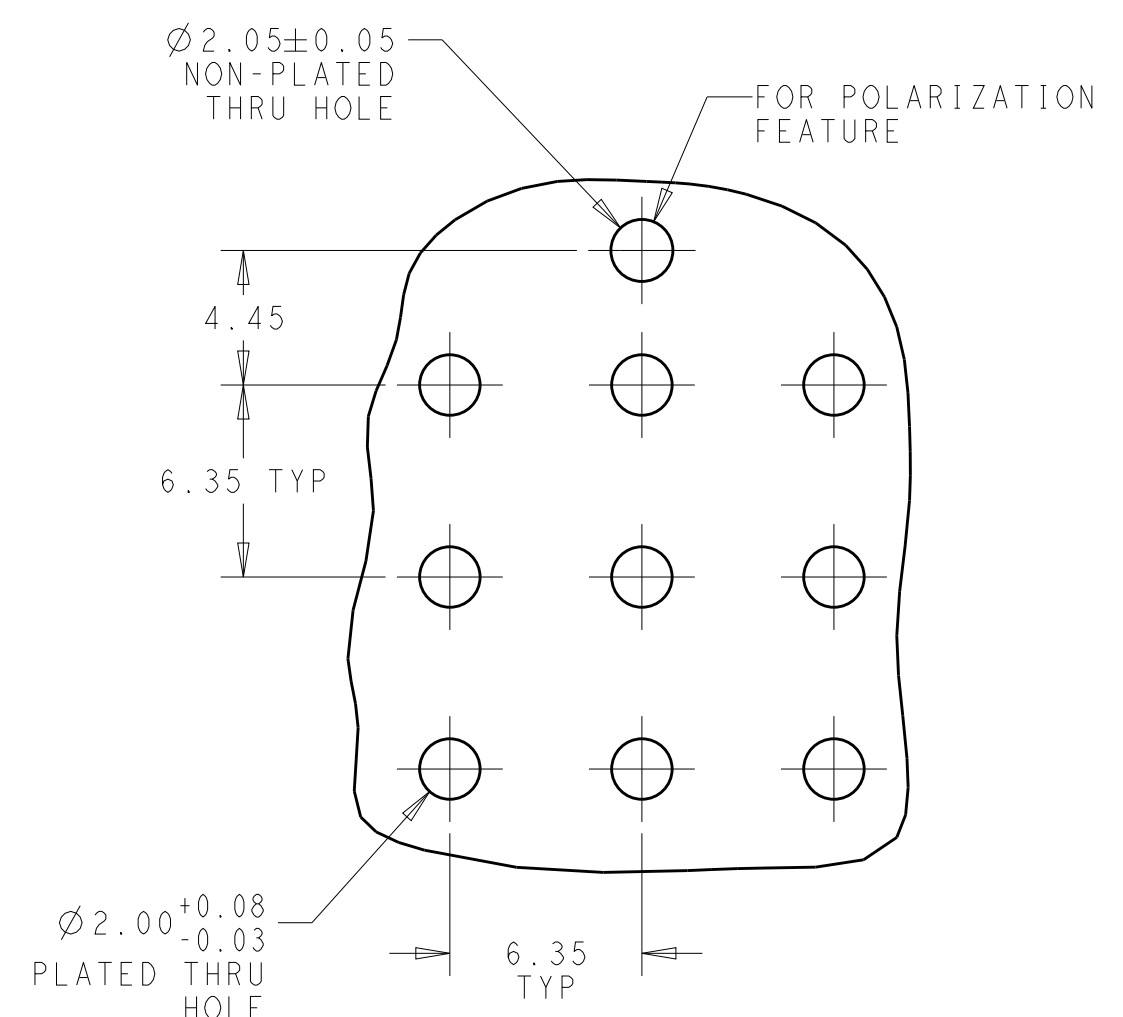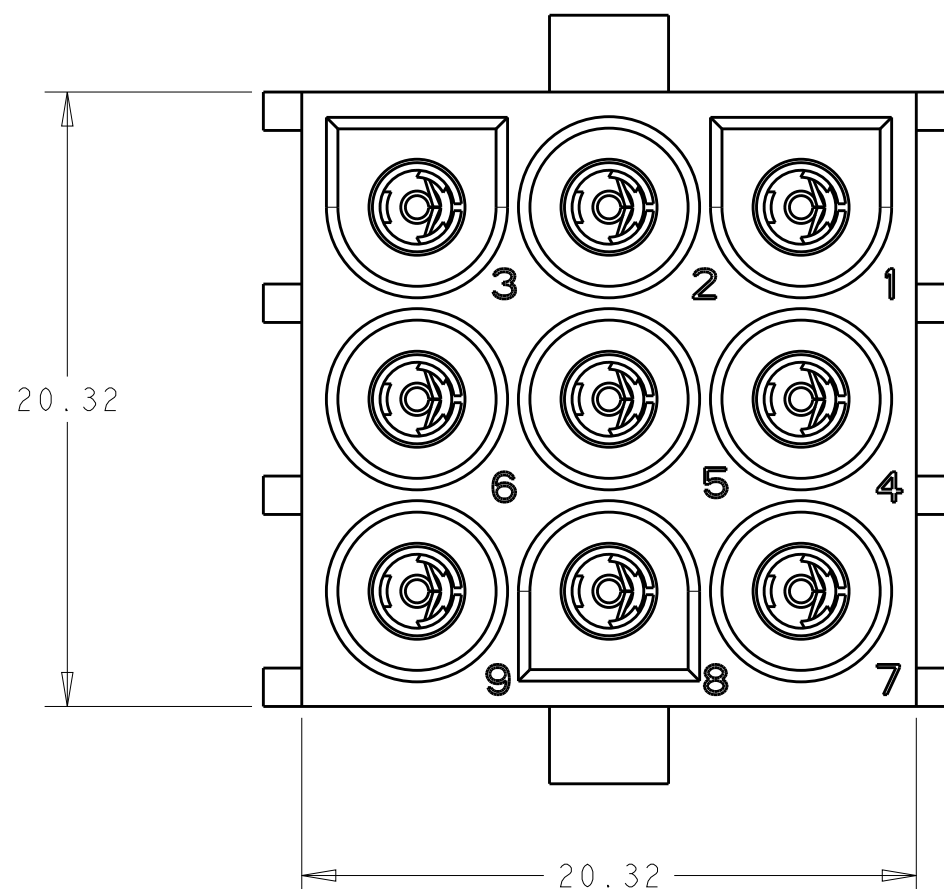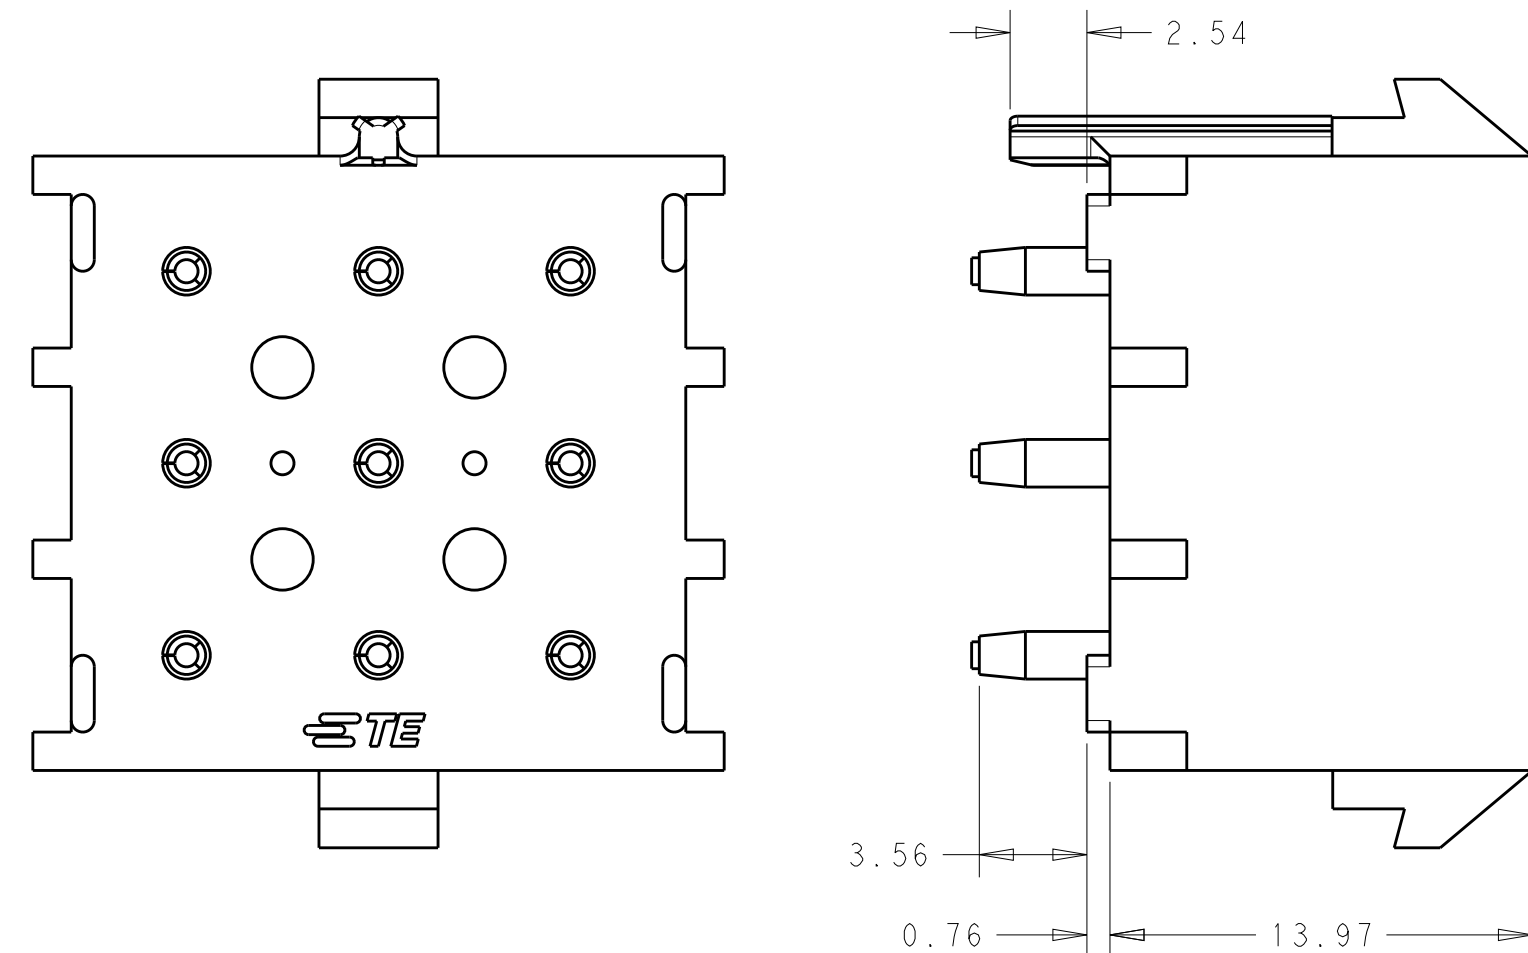

2213756-2, 1-2213756-2
SHOWN

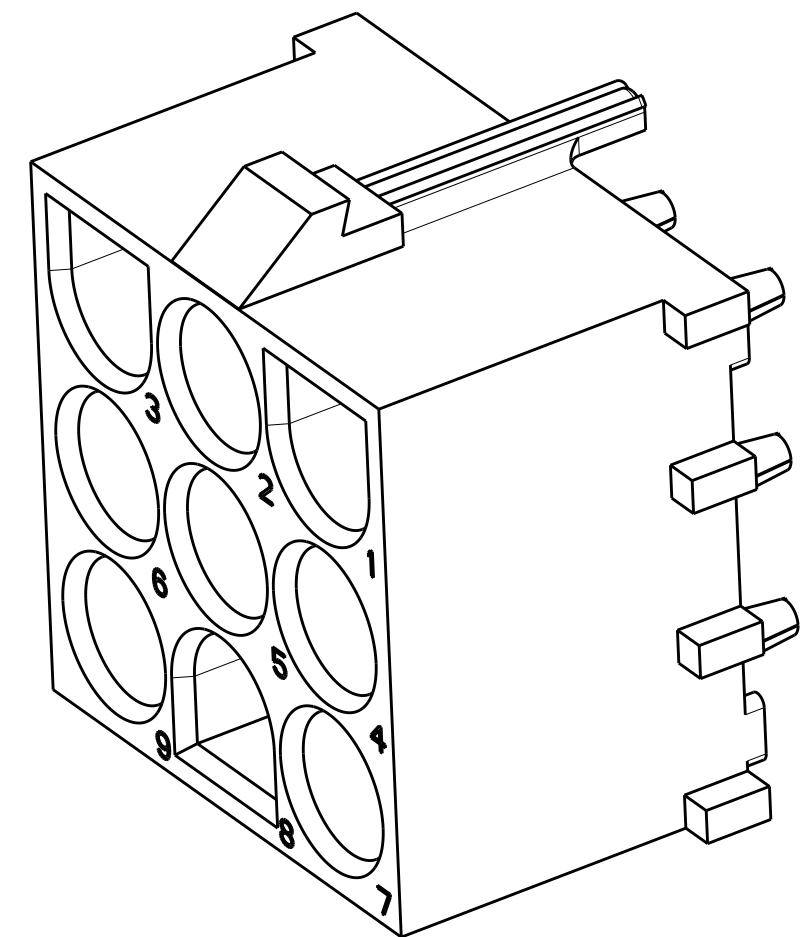

B

B

A

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	0 PLC ±0.5
	1 PLC ±0.13
	2 PLC ±0.13
	3 PLC ±0.13
	4 PLC ±0.13
	ANGLES ±0.5
MATERIAL	FINISH
-	-
-	-


DWN	J. SHAFFER	02NOV2015
CHK	M. MOSTOLLER	02NOV2015
APVD	M. MOSTOLLER	02NOV2015
PRODUCT SPEC	108-1053	
APPLICATION SPEC	114-133083	
WEIGHT	-	
CUSTOMER DRAWING		

TE Connectivity

NAME	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3 ROW SOCKET HEADER ASSEMBLY, UMNL, HIGH TEMPERATURE	A2	-	C-2213756	-

SCALE	SHEET	OF	REV
2:1	2	4	A1

P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

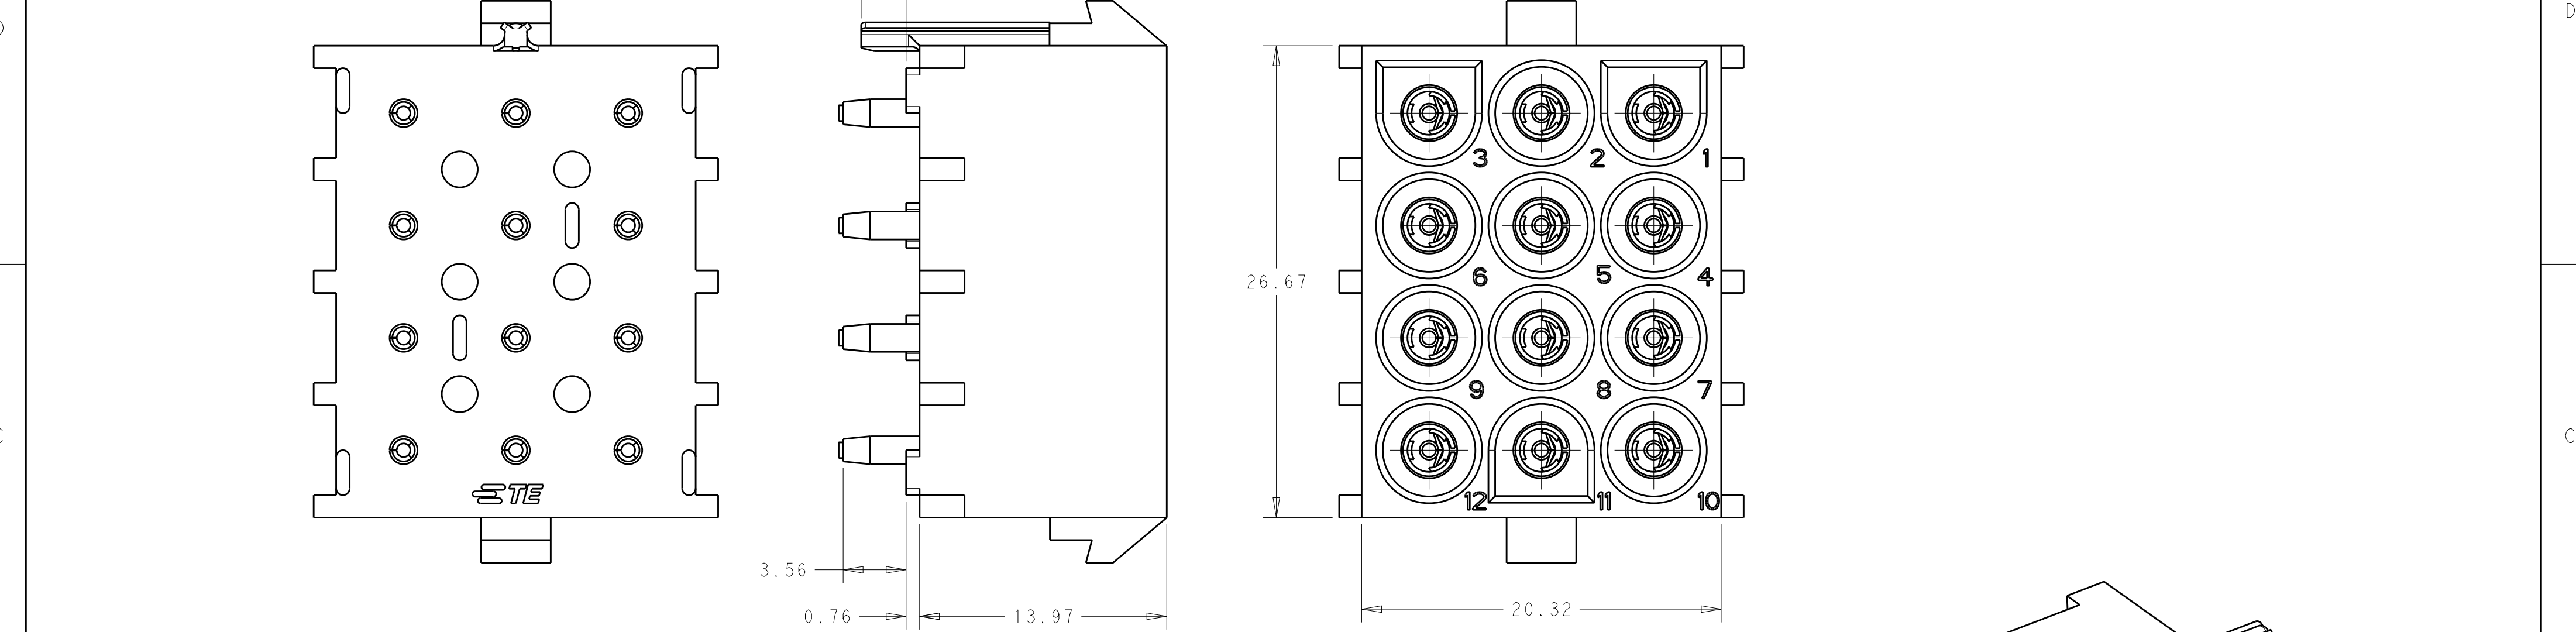

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 02NOV2015		TE Connectivity	
DIMENSIONS:		CHK M. MOSTOLLER 02NOV2015		NAME 3 ROW SOCKET HEADER ASSEMBLY, UMNL, HIGH TEMPERATURE	
mm		APVD M. MOSTOLLER 02NOV2015		SIZE A2	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-1053		CAGE CODE -	
0 PLC ±		APPLICATION SPEC 114-133083		DRAWING NO C-2213756	
1 PLC ±0.5		WEIGHT -		RESTRICTED TO -	
2 PLC ±0.13		CUSTOMER DRAWING		SCALE 2:1	
3 PLC ±				SHEET 3 OF 4	
4 PLC ±				REV A1	
ANGLES ±					
FINISH -					
-					

D

C

B






A

D

C


B

A

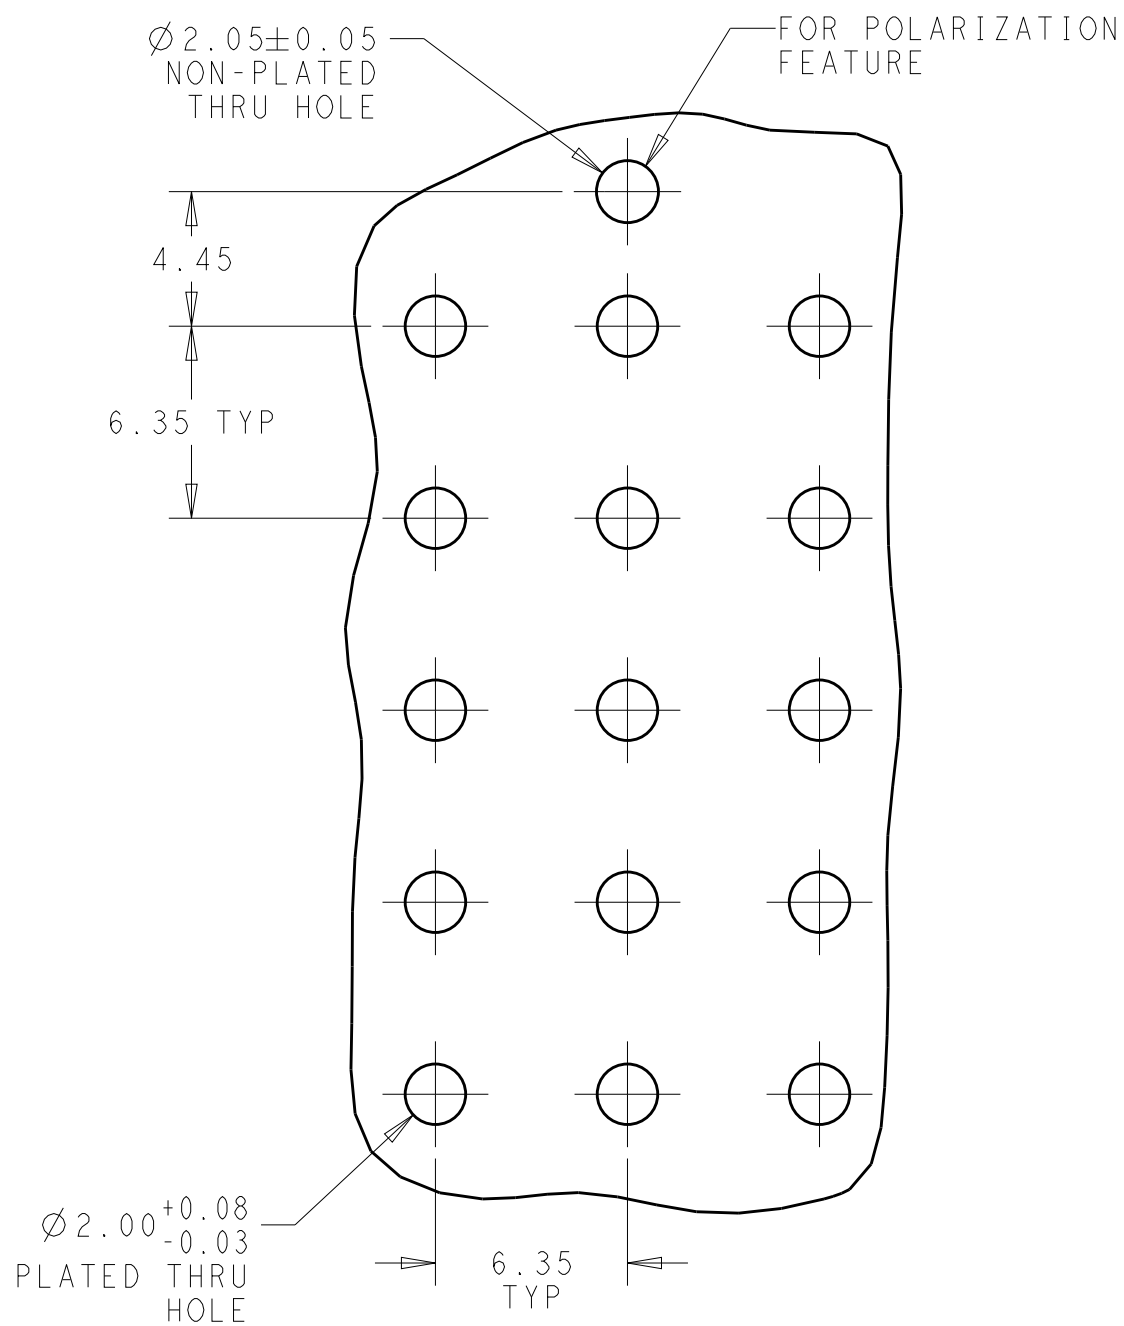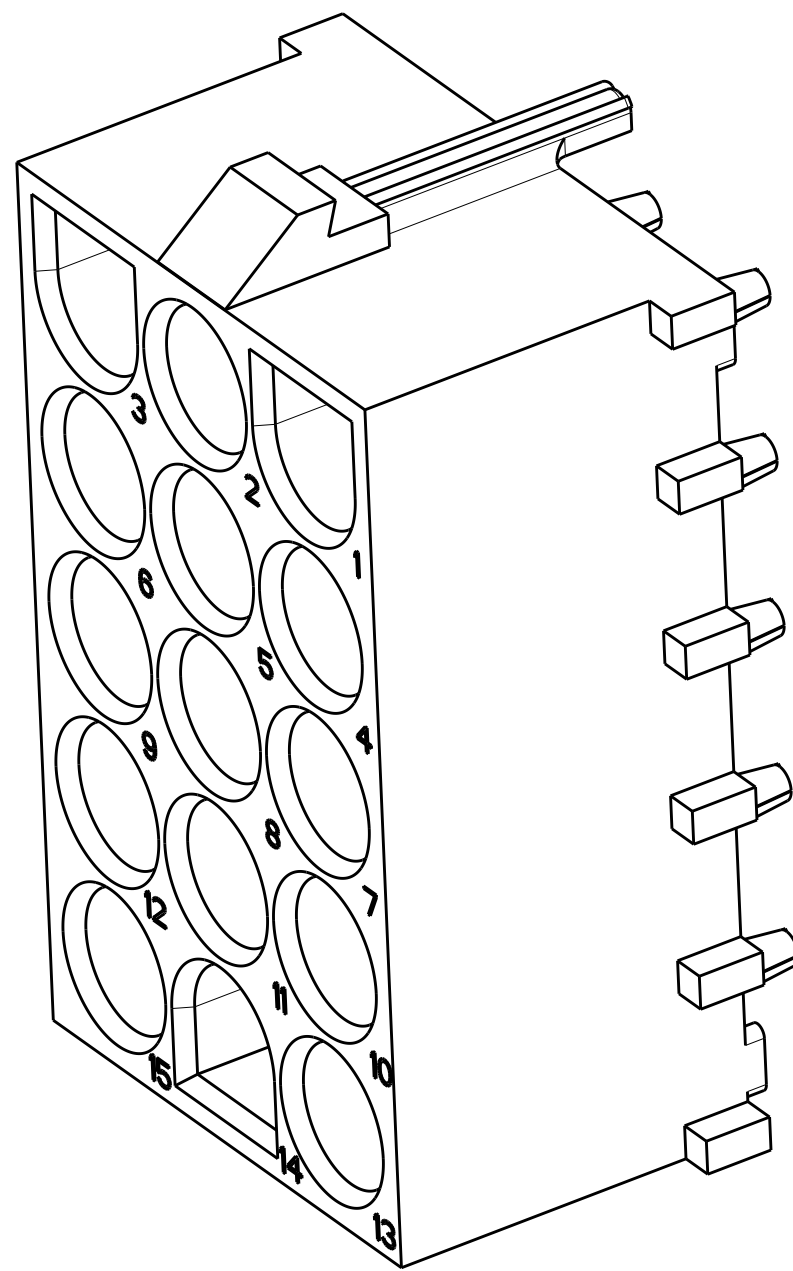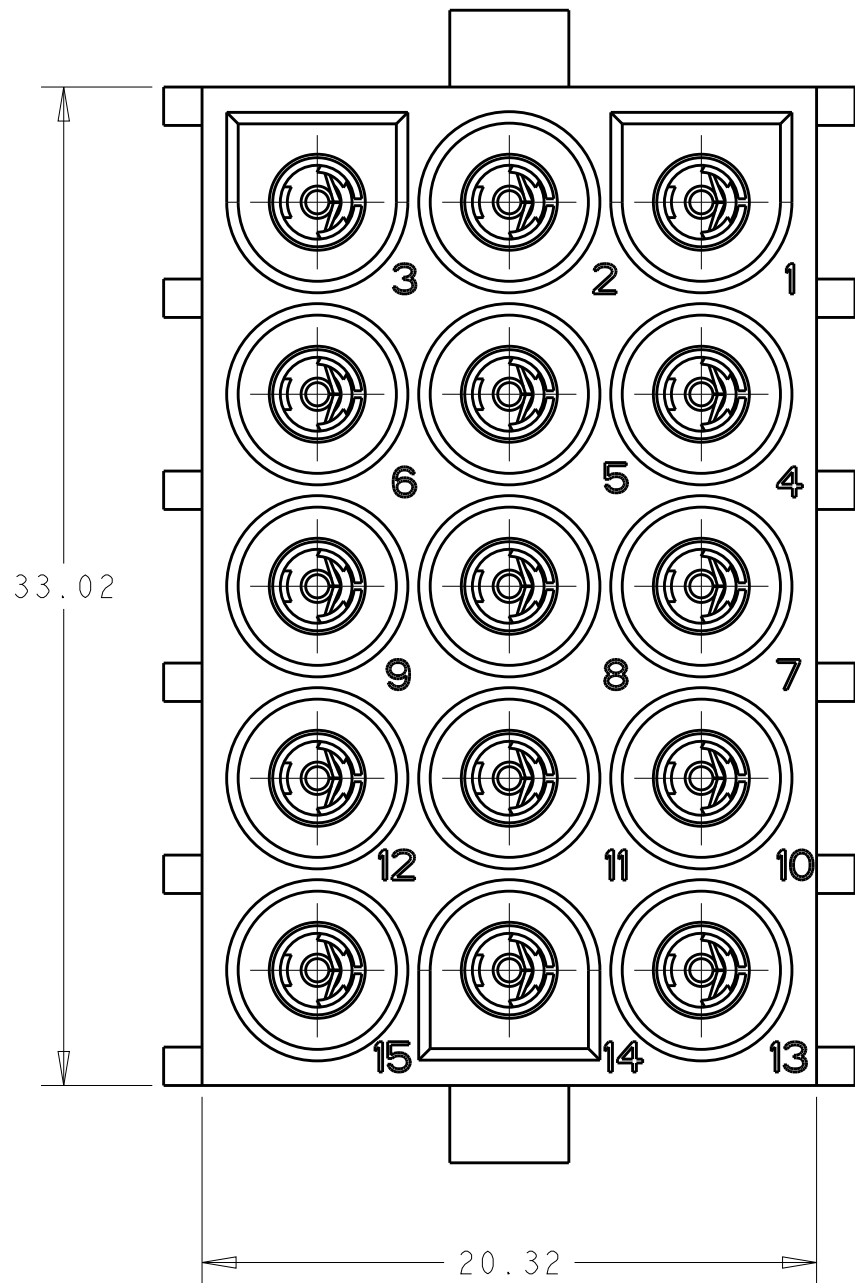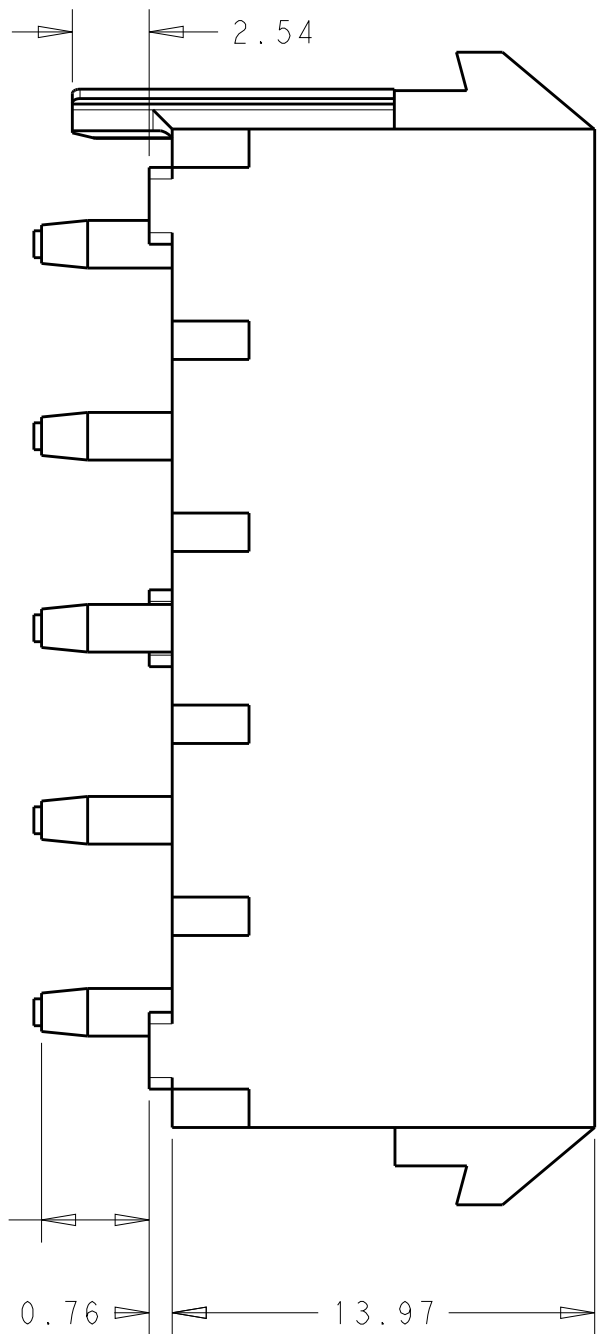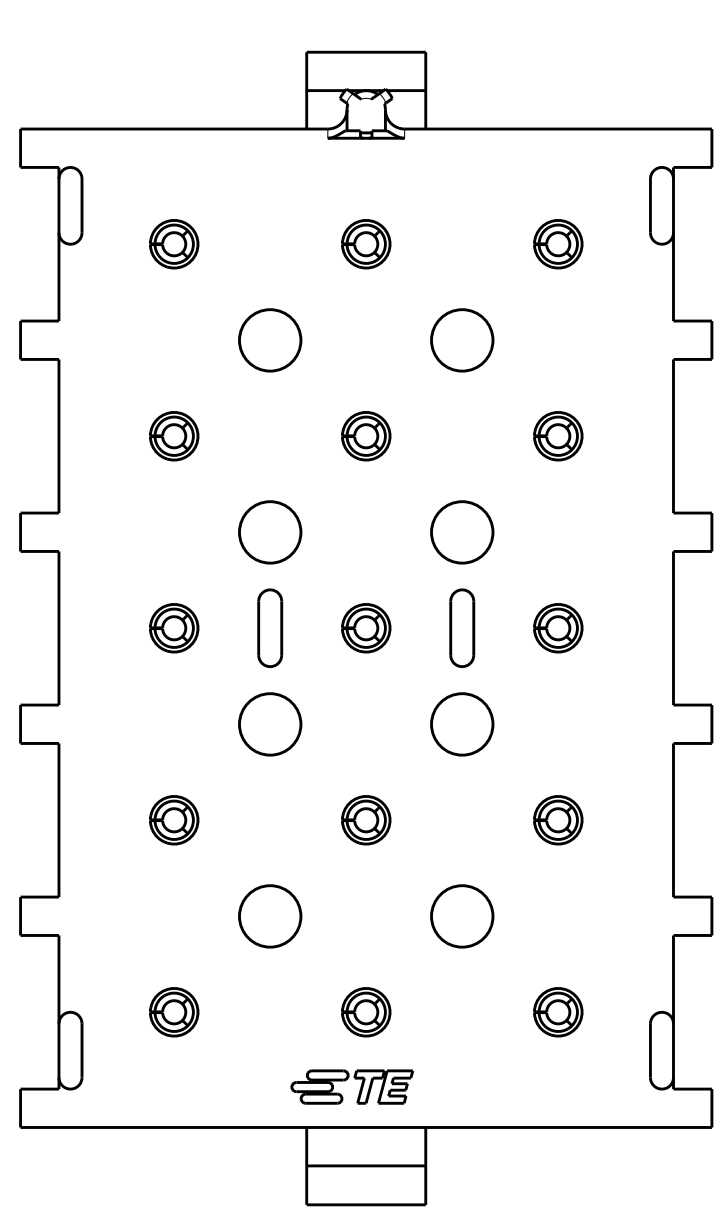

RECOMMENDED MOUNTING HOLE PATTERN
FOR 1.57 THICK PC BOARD
SCALE 4:1

2213756-4, 1-2213756-4
SHOWN

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. SHAFFER 02NOV2015	 TE Connectivity			
DIMENSIONS:		CHK M. MOSTOLLER 02NOV2015				
mm		APVD M. MOSTOLLER 02NOV2015	NAME 3 ROW SOCKET HEADER ASSEMBLY, UMNL, HIGH TEMPERATURE			
		PRODUCT SPEC	SIZE			
		108-1053	A2			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	CAGE CODE		DRAWING NO	
0 PLC ±		114-133083	-		C-2213756	
1 PLC ±0.5		WEIGHT			RESTRICTED TO	
2 PLC ±0.13		CUSTOMER DRAWING			-	
3 PLC ±		SCALE	2:1		SHEET	
4 PLC ±		4 OF 4			REV	
ANGLES ±					A1	
FINISH ±						
-						
-						