
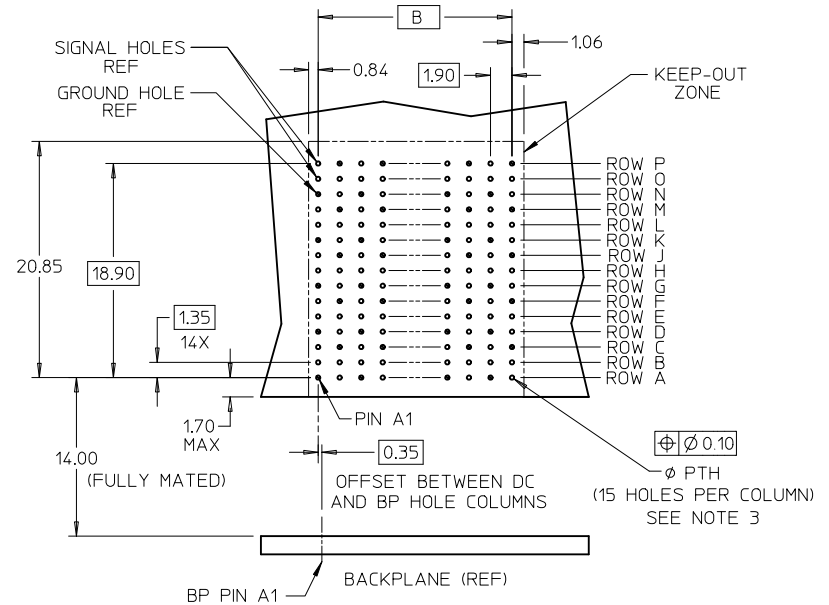
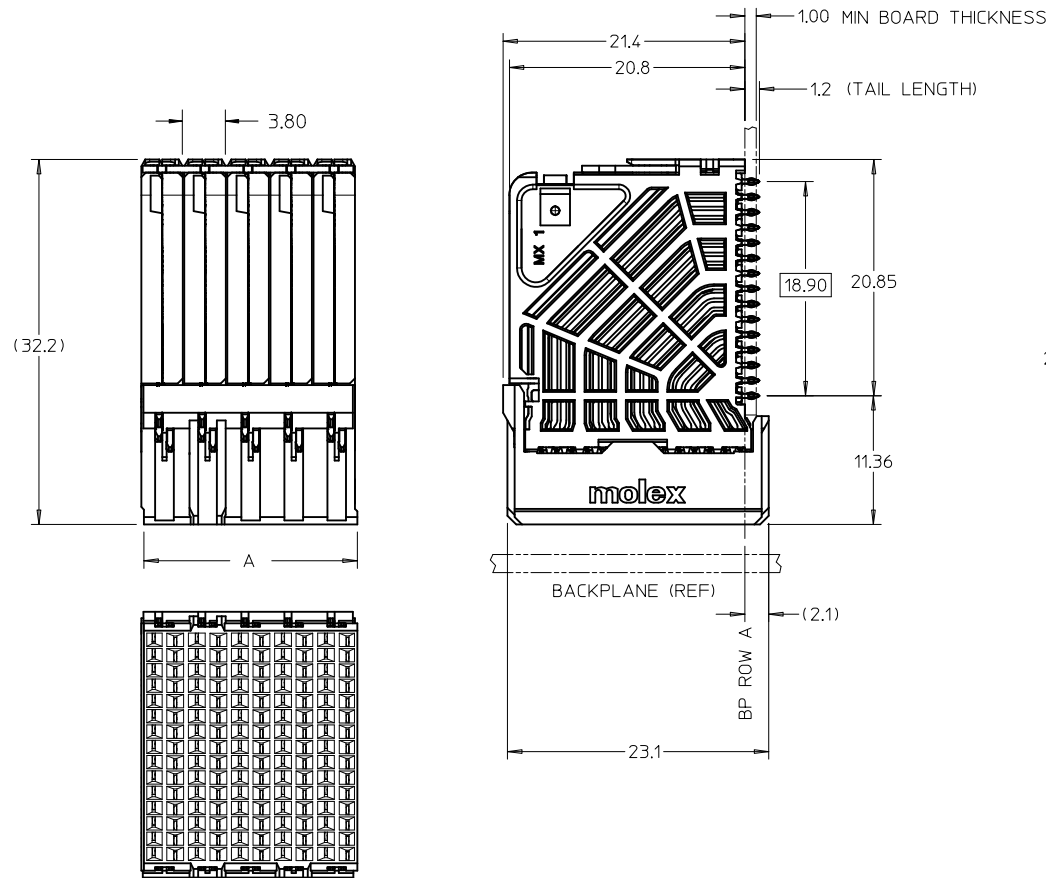


MATERIAL NUMBER	# OF COLUMNS	# OF DIFF PAIR	DIM "A" MAX	DIM "B"	PTHØ
76780-*010	10	50	19.00	17.10	0.46±0.05
76780-*016	16	80	30.40	28.50	0.46±0.05
76780-*020	10	50	19.00	17.10	0.39±0.04
76780-*026	16	80	30.40	28.50	0.39±0.04

76780-*0**

0 = OPEN TIN-LEAD
1 = OPEN LEAD-FREE

OF COLUMNS
10 = 10 COL 0.46 PTH
16 = 16 COL 0.46 PTH
20 = 10 COL 0.39 PTH
26 = 16 COL 0.39 PTH

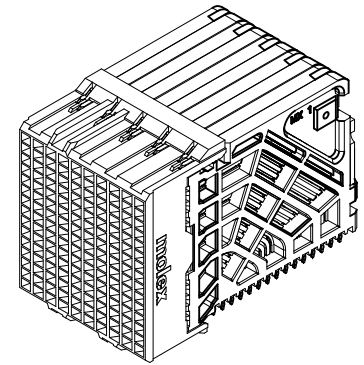

DAUGHTERCARD HOLE PATTERN
(CONNECTOR SIDE)

NOTES:

1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0
TERMINALS - HIGH PERFORMANCE COPPER ALLOY
2. FINISH: 30µIN MIN GOLD IN CONTACT AREA. SELECTIVE TIN OR
SELECTIVE TIN-LEAD ON PCB TAILS. NICKEL OVERALL.
3. REFER TO MOLEX PRODUCT SPEC PS-76060-999 FOR PERFORMANCE SPECIFICATIONS
AND ADDITIONAL PCB INFORMATION.
4. EACH SIGNAL WAFER CONTAINS 2 COLUMNS OF TERMINALS.
5. PRODUCT IS PACKAGED PER PK-70873-611.
6. THIS PART CONFORMS TO CLASS B REQUIREMENTS OF COSMETIC SPEC PS-45499-002.
7. REFER TO MOLEX SALES DRAWING SD-76775-001 FOR THE MATING HEADERS.

BEEFY WAFER EC NO: UCP2010-2161 DRWN:TELO 2010/02/25 CHKD: 2010/03/05 APPR: JLAURX 2010/03/08	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)			DIMENSION STYLE MM ONLY		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION	
				mm	INCH	DRAWN BY JLAURX	DATE 2008/06/16	TITLE IMPACT 85 OHM, 5 PAIR DAUGHTERCARD MODULE UNGUIDED SALES DRAWING			
			4 PLACES	± ---	± ---	CHECKED BY TELO	DATE 2008/06/16				
			3 PLACES	± ---	± ---	APPROVED BY JLAURX		DATE 2010/03/05	molex	MOLEX INCORPORATED	
			2 PLACES	± 0.13	± ---						
			1 PLACE	± 0.25	± ---	MATERIAL NO. SEE CHART		DOCUMENT NO. SD-76780-001	SHEET NO. 1 OF 1		
			ANGULAR ±1/2°								
			DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE C		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION			