

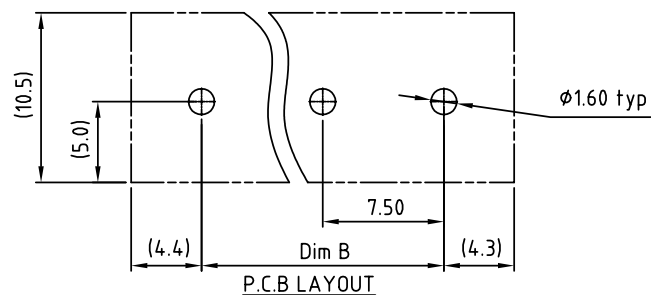


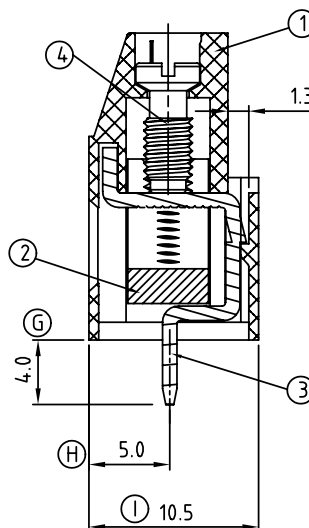

DIMENSION		Poles	Tolerance
Dim A	N×7.5	4p-8p	±0.15
Dim B	(N-1)×7.5	9p-12p	±0.25
		13p-16p	±0.35

N=Number of contacts

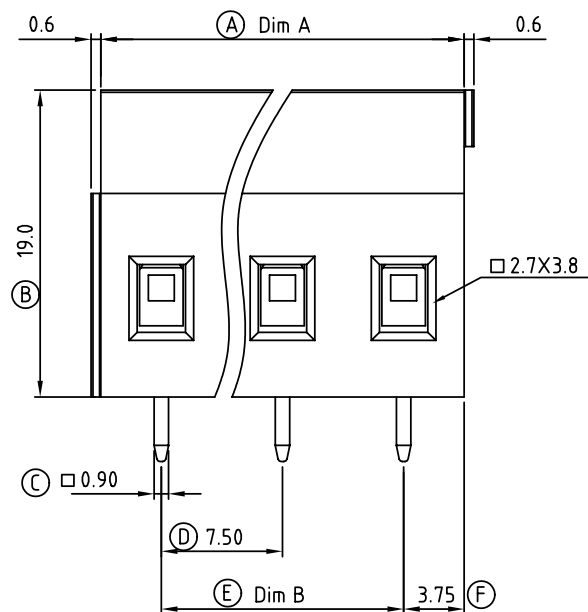

SIGN	DATE	DESCRIPTION	APPROVER
△	11/09'10	Add is " VDE "	Aaron
△			
△			

THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!

Material:

- Item 1 Terminal housing:Thermoplastic (UL 94V-0)
- Item 2 Clamp: Brass Ni plated
- Item 3 Wire guard solder pin:Brass Tin plated
- Item 4 Terminal screw: Steel Zinc plating"-slot type

Electrical	cULus	VDE
● Voltage rating:	300VAC	750V
● Current rating:	20A	24A
● Wire range :		0.2-2.5mm ²
● Solid wire(AWG):	12-30	
● Stranded wire(AWG):	12-30	
● Torque(Lb-In):	3.5	0.5 N.m
● Screw:	M3	
● Wire strip length:	6-7mm	
● Withstanding Voltage:	1.6KV	3KV
● Operating temperature:	-40°C to +115°C	
● Soldering temperature:	250°C±10°C/5 Sec	
● Safety Approval:		



VJ xx 41 x 5 xxxx G

	No. of poles	Color	RoHS
04	4 CONTACTS	0 Black (RAL9005)	Pb<40,000ppm
05	5 CONTACTS	2 Red (RAL3001/D)	
...	...	3 Orange(RAL2011/P)	
16	16 CONTACTS	4 Yellow(RAL1018/A)	
		5 Green(RAL6018/T)	
		6 Blue (RAL5015/A)	
		8 Grey(RAL7035/D)	

0000:"@ "Logo (Standard)
000A:"ANYTEK"Logo
Any special item by customer request, please contact sales department.

ANYTEK

CUSTOMER COPY

ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD

TITLE	VJ-7.5 Series 4P-16P Horizontal Solid block (180D wire inlet)-----Without cover					
PART NO.	VJxx41x5xxxxG			DWG NO.	8VJ0208	
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.		
		Aaron 2010.11.09	Aaron 2009.10.19			
					UNIT: mm	X. ±0.50
					SCALE: NONE	X.X ±0.30
						X.XX ±0.10
						X* ±1°
				SHEET: 01/01	REV.: C	