


SIGN	DATE	DESCRIPTION	APPROVER
△	11/09'10	Add is " VDE "	Aaron
△			
△			

*THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!*

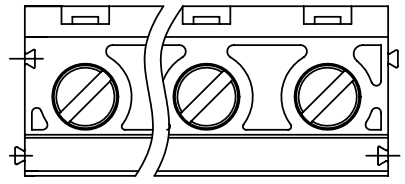

DIMENSION		Poles	Tolerance
Dim A	N×7.5	4p-8p	±0.15
Dim B	(N-1)×7.5	9p-12p	±0.25
		13p-16p	±0.35

N=Number of contacts




- Material:
- Item 1 Terminal housing:Thermoplastic (UL 94V-0)
  - Item 2 Clamp: Brass Ni plated
  - Item 3 Wire guard solder pin:Brass Tin plated
  - Item 4 Terminal screw: Steel Zinc plating"-slot type

- △ Electrical cULus VDE
- Voltage rating: 300VAC 750V
  - Current rating: 20A 24A
  - Wire range : 0.2-2.5mm<sup>2</sup>
  - Solid wire(AWG): 12-30
  - Stranded wire(AWG): 12-30
  - Torque(Lb-In): 3.5 0.5 N.m
  - Screw: M3
  - Wire strip length: 6-7mm
  - Withstanding Voltage: 1.6KV 3KV
  - Operating temperature: -40°C to +115°C
  - Soldering temperature: 250°C±10°C/5 Sec
  - Safety Approval:



VJ xx 41 x 5 xxxx G

- No. of poles      0 Black (RAL9005)      0000:"@ "Logo (Standard )  
 04 4 CONTACTS      2 Red (RAL3001/D)      000A:"ANYTEK"Logo  
 05 5 CONTACTS      3 Orange(RAL2011/P)      Any special item by  
 ...      4 Yellow(RAL1018/A)      customer request,  
 16 16 CONTACTS      5 Green(RAL6018/T)      please contact sales  
                                  6 Blue (RAL5015/A)      department.  
                                  8 Grey(RAL7035/D)

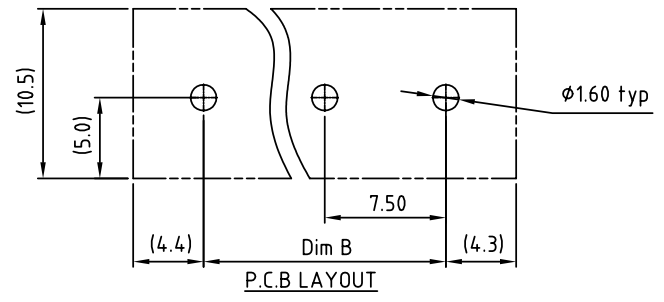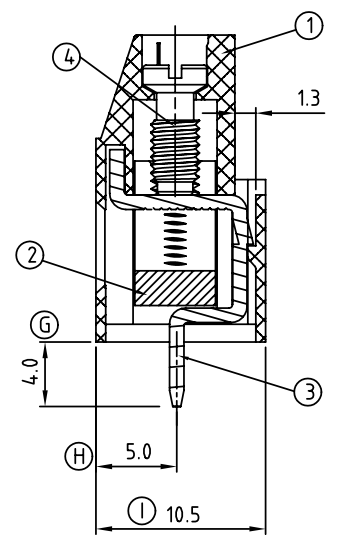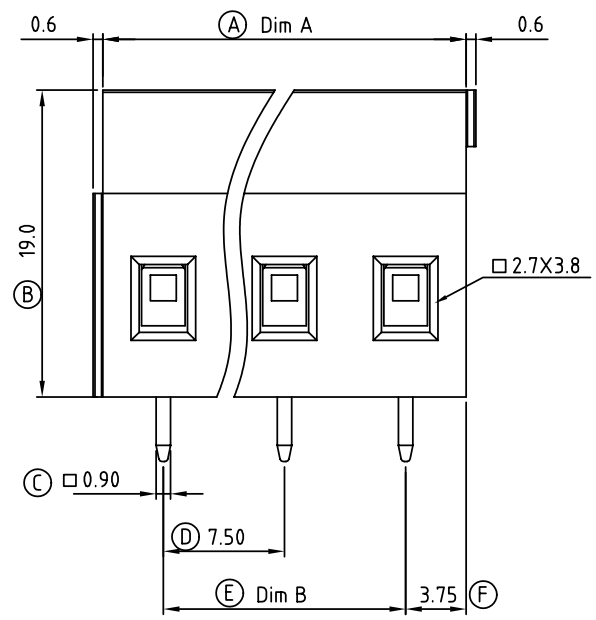

<b>ANYTEK</b>		<b>CUSTOMER COPY</b>	
<small>ALL RIGHTS RESERVED. REPRODUCTION OR ISSUE TO THIRD PARTIES IN ANY FORM WHATSOEVER IS NOT PERMITTED WITHOUT WRITTEN AUTHORITY FROM THE PROPRIETOR. PROPERTY OF ANYTEK TECHNOLOGY CO., LTD</small>			
TITLE	VJ-7.5 Series 4P-16P Horizontal Solid block ( 180D wire inlet )-----Without cover		
PART NO.	VJxx41x5xxxxG	DWG NO.	8VJ0208
APPROVED	CHECKED	DESIGNED	DRAWN
		Aaron 2010.11.09	Aaron 2009.10.19
		SHEET: 01/01	
		UNIT: mm SCALE: NONE REV.: C	
		Tolerance X. ±0.50 X.X ±0.30 X.XX ±0.10 X* ±1*	